

# Frozen Frozen granita dispenser with 3 bowls, mechanical control and lighted panel

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



562530 (IPRO3MLR290)

Frozen Granita Dispenser with 3X11 I insulated bowls, mechanical control and lighted panel, R290

# **Short Form Specification**

### Item No.

Frozen granita dispenser with 3 bowls; the ITANK ™ Technology prevents ice accumulation on the outer side of the bowl and the bowl shape allows a natural mixing action to ensure an optimum consistency of the product. Customizable lid merchandiser and back graphic. Mechanical keypad allows for setting of cooling and defrost modes. Front illuminated panel provides customers with the opportunity to advertise their product and maximise impulse buying. Electromechanical control. Sliding drip tray.

## **Main Features**


- Ideal for the production of slush.
- The insulated tank guarantees higher cooling efficiency and lower effect of the external temperature on product's preparation and maintenance time reducing condense and draining; it is the best solution in hot climate conditions.
- The ITANK ™ Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- Ideal for operators who want an innovative and distinctive equipment. Mechanical keypad allows for setting of cooling and defrost modes.
- The front illuminated panel provides customers with the opportunity to advertise their product and maximise impulse buying.

#### Construction

- Electromechanical control.
- Sliding drip tray.

#### APPROVAL:



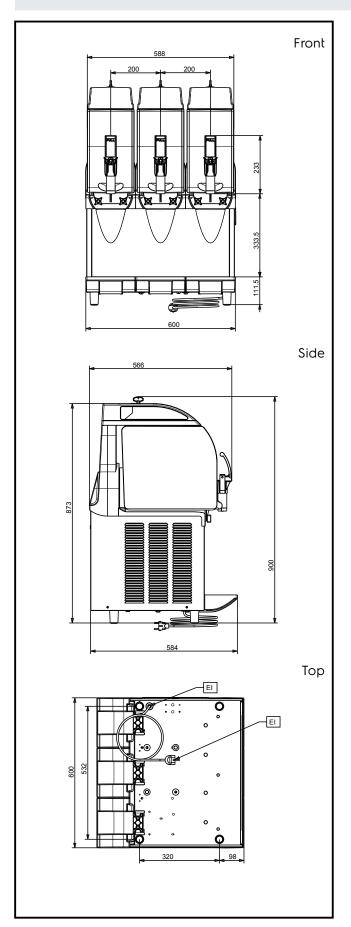

Frozen
Frozen granita dispenser with 3 bowls, mechanical control and lighted
panel
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.



# Frozen Frozen granita dispenser with 3 bowls, mechanical control and lighted panel

**Electric** 

Supply voltage: 220-240 V/1 ph/50 Hz

1.4 kW Electrical power, max:

**Key Information:** 

Net weight: 82 kg

Sustainability

Refrigerant type: R290 Refrigerant weight (unit 1): 108 g

