Coffee System PrecisionBrew air-heated shuttle single brewer

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
<u>^_ ~ ~ ~ </u>	



600671 (EPBC1A2)

PrecisionBrew Air-heated Shuttle Brewer, single shuttle to be ordered separately

Short Form Specification

Item No.

Single, air-heated PrecisionBrew™ shuttle brewer that brews into 5.7lt shuttle. Shuttles® sensor prevents brewing when server is not in place. Java-tate™ technology inside the shuttles gently stirs the brewed coffee at regular short intervals, keeping the drink perfectly blended, and ensuring a consistent flavor profile. Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation. Standard electronic basket lock prevents basket removal during brewing and dripout.

Main Features

- Reimagined modern design for PrecisionBrew™: single and double virtual sightglass models brew into 5.7 L air-heated Shuttle(s)®.
- Portable Encapsulair Shuttles insulate with air between the internal chambers, maintaining coffee temperature and flavor.
- Java-tate technology inside the shuttles gently stirs the brewed coffee at regular intervals, keeping the coffee perfectly blended, ensuring a consistent flavor profile.
- Customers can see the blending through the virtual sight glass with multi-colored lights, but with no sightglass to clean.
- Sensor prevents brewing when shuttle is not in place.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.

Construction

 Electronic basket lock prevents basket removal during brewing and dripout.

Included Accessories

 1 of Stainless steel coffee brew PNC 870059 basket

Optional Accessories


- Remote air-heated shuttle stand PNC 600679 ☐ used with shuttle EAS15
- 5,7 It Air-heated shuttle used with PNC 600681 ☐ brewers EPBC1A2, EPBC1A2UK, EPBC2A2, EPBC2A2UK
- Shuttle graphics for air-heated PNC 870015
 Precision Brewers used with shuttle EAS15
- Filter paper, 35,5x15,2 cm (500 PNC 870024 D pieces per box)
- Plastic coffee brew basket PNC 870040 🖵

APPROVAL:





Coffee System PrecisionBrew air-heated shuttle single brewer

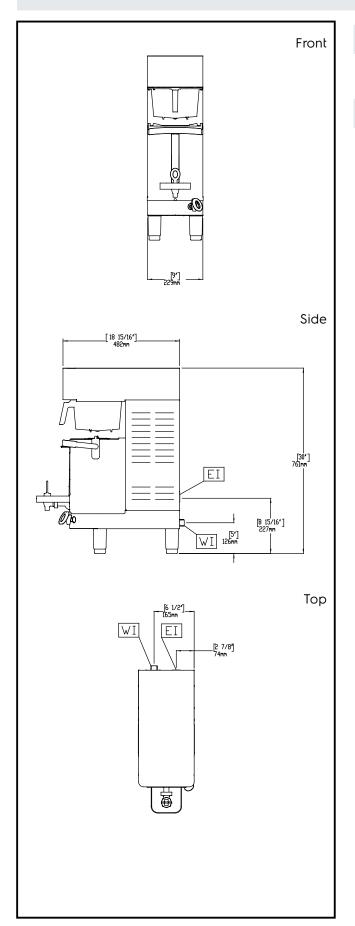

Electric

Supply voltage:

600671 (EPBC1A2) 230 V/1N ph/50/60 Hz

Electrical power max.: 2.8 kW

Key Information:

External dimensions, Width: 232 mm 479 mm External dimensions, Depth: 765 mm External dimensions, Height: Net weight: 18 kg 29 kg Shipping weight: Shipping height: 780 mm Shipping width: 360 mm Shipping depth: 650 mm Shipping volume: 0.18 m³

