

Coffee System PrecisionBrew air-heated shuttle double brewer



600672 (EPBC2A2)

PrecisionBrew Air-heated Shuttle Brewer, double shuttles to be ordered separately

Short Form Specification

Item No.

Double, air-heated PrecisionBrew shuttle brewer that brews into 5.7lt shuttle. Shuttles® sensor prevents brewing when server is not in place. Java-tate™ technology inside the shuttles gently stirs the brewed coffee at regular short intervals, keeping the drink perfectly blended, and ensuring a consistent flavor profile. Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation. Standard electronic basket lock prevents basket removal during brewing and dripout.

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

Main Features

- Reimagined modern design for PrecisionBrew™: single and double virtual sightglass models brew into 5.7 L air-heated Shuttle(s)[®].
- Portable Encapsulair Shuttles insulate with air between the internal chambers, maintaining coffee temperature and flavor.
- Java-tate technology inside the shuttles gently stirs the brewed coffee at regular intervals, keeping the coffee perfectly blended, ensuring a consistent flavor profile.
- Customers can see the blending through the virtual sight glass with multi-colored lights, but with no sightglass to clean.
- Sensor prevents brewing when shuttle is not in place.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.

Construction

 Electronic basket lock prevents basket removal during brewing and dripout.

Included Accessories

• 2 of Stainless steel coffee brew PNC 870059 basket

Optional Accessories


- Remote air-heated shuttle stand PNC 600679 🗅 used with shuttle EAS15
- 5,7 It Air-heated shuttle used with PNC 600681 $\ \Box$ brewers EPBC1A2, EPBC1A2UK, EPBC2A2, EPBC2A2UK
- PNC 870015 🗅 Shuttle graphics for air-heated Precision Brewers used with shuttle EAS15
- Filter paper, 35,5x15,2 cm (500 PNC 870024 🗅 pieces per box)
- Plastic coffee brew basket PNC 870040 🗅

ROFESSIONA

APPROVAL:

Electrolux PROFESSIONAL

Coffee System PrecisionBrew air-heated shuttle double brewer

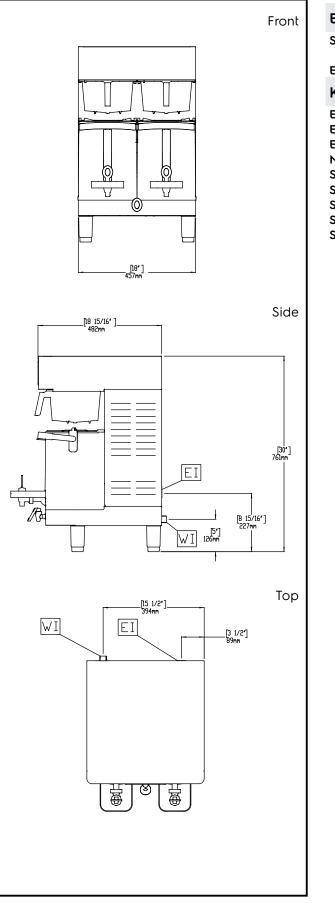

CE

Supply voltage: 600672 (EPBC2A2) 230 V/1N ph/50/60 Hz Electrical power max.: 2.8 kW

Key Information:

External dimensions, Width:44External dimensions, Depth:47External dimensions, Height:77Net weight:32Shipping weight:44Shipping height:76Shipping width:56Shipping depth:64Shipping volume:04

460 mm 479 mm 765 mm 32 kg 43 kg 780 mm 590 mm 650 mm 0.3 m³

Coffee System PrecisionBrew air-heated shuttle double brewer

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.