

## Coffee System PrecisionBrew warmer shuttle single brewer

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**600673 (EPBC1W2)**

PrecisionBrew Warmer Shuttle Brewer, single - shuttle to be ordered separately

### Short Form Specification

**Item No.** \_\_\_\_\_

Single PrecisionBrew warmer shuttle brewer that brews into 5.7lt vacuum shuttle. Shuttles® sensor prevents brewing when server is not in place. Digitally controlled with PrecisionBrew™ Technology. Advanced touchscreen digital interface simplifies and streamlines brewing and operation.

### Main Features

- Sensor prevents brewing when shuttle is not in place.
- Machine knows if brew basket is installed.
- Digitally controlled with PrecisionBrew™ Technology.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.
- Reimagined modern design for PrecisionBrew™: single and double sightglass models brew into 5.7 L warmer Shuttle(s)®.

### Included Accessories


- 1 of Stainless steel coffee brew basket PNC 870059

### Optional Accessories


- Remote warmer shuttle stand used with shuttle EWS15 PNC 600680
- 5,7 lt Warmer shuttle used with brewers EPBC1W2, EPBC1W2UK, EPBC2W2, EPBC2W2UK PNC 600682
- Shuttle graphics for warmer Precision Brewers used with shuttle EWS15 PNC 870017
- Filter paper, 35,5x15,2 cm (500 pieces per box) PNC 870024
- Plastic coffee brew basket PNC 870040

**APPROVAL:** \_\_\_\_\_


Side

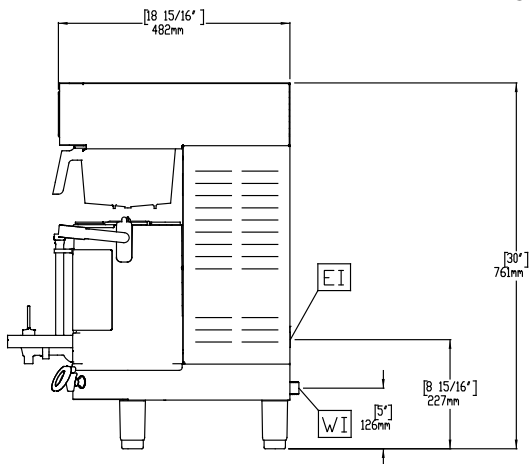

Front

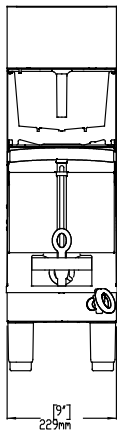

Top

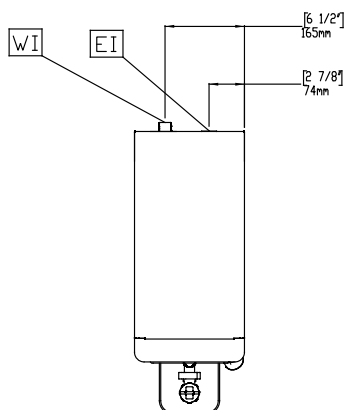

## Electric

### Supply voltage:

600673 (EPBC1W2) 230 V/1N ph/50/60 Hz

### Electrical power max.:

2.8 kW

## Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 232 mm              |
| External dimensions, Depth:  | 486 mm              |
| External dimensions, Height: | 852 mm              |
| Net weight:                  | 20 kg               |
| Shipping weight:             | 23 kg               |
| Shipping height:             | 784 mm              |
| Shipping width:              | 359 mm              |
| Shipping depth:              | 654 mm              |
| Shipping volume:             | 0.18 m <sup>3</sup> |