PrecisionBrew, double with integrated base for vacuum shuttle



## **Coffee System** PrecisionBrew, double with integrated base for vacuum shuttle

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



600676 (EPBC2V2)

PrecisionBrew Vacuum Shuttle Brewer, with integrated Base for vacuum shuttle without stand, double - shuttles, graphics and stands to be ordered separately

# **Short Form Specification**

#### Item No.

Double PrecisionBrew vacuum shuttle brewer that brews into 5.7lt vacuum shuttle. Shuttles® sensor prevents brewing when server is not in place. Digitally controlled with PrecisionBrew™ Technology. Advanced touchscreen digital interface simplifies and streamlines brewing and operation.

#### **Main Features**

- Reimagined modern design for PrecisionBrew™: single and double sightglass models brew into 5.7 L vacuum Shuttle(s).
- Sensor prevents brewing when shuttle is not in place.
- Machine knows if brew basket is installed.
- Digitally controlled with PrecisionBrew™ Technology.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.

#### **Included Accessories**

• 2 of Stainless steel coffee brew PNC 870059 basket

### Optional Accessories

Vacuum Shuttle without stand


model V15

- 5,7 It Vacuum shuttle without PNC 600633 🖵 stand used with brewers EPBC1V2, EPBC1V2UK, EPBC2V2, EPBC2V2UK
- PNC 870016 📮 Shuttle graphics for vacuum Precision Brewers used with shuttle VS15 and V15
- Filter paper, 35,5x15,2 cm (500 pieces per box) PNC 870024 🖵
- PNC 870040 🖵 Plastic coffee brew basket Vacuum Shuttle Stand for PNC 870043 📮

#### APPROVAL:



## Coffee System PrecisionBrew, double with integrated base for vacuum shuttle

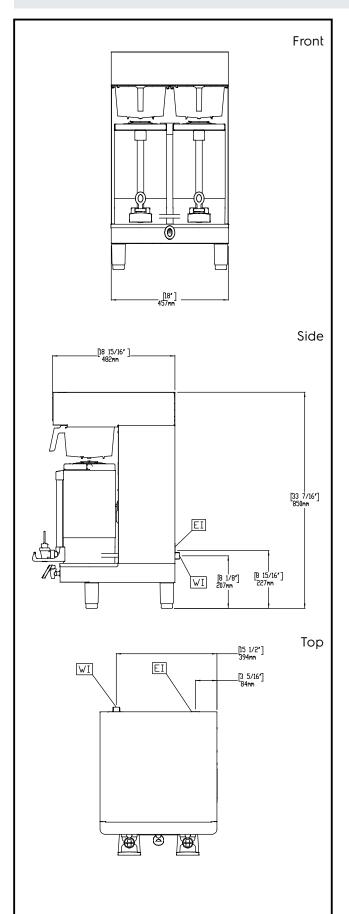

### **Electric**

Supply voltage:

**600676 (EPBC2V2)** 230 V/1N ph/50/60 Hz

Electrical power max.: 2.8 kW

### **Key Information:**

External dimensions, Width: 552 mm External dimensions, Depth: 486 mm External dimensions, Height: 889 mm Net weight: 36 kg Shipping weight: 43 kg Shipping height: 890 mm Shipping width: 590 mm Shipping depth: 650 mm Shipping volume: 0.34 m<sup>3</sup>

