

LiberoPro Plug-in induction Griddle XL, stainless steel smooth plate

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



600887 (EIIREDOMES)

Plug-in induction Griddle XL,
stainless steel smooth plate
- 3-phase

Short Form Specification

Item No. _____

Plug-in 3 Phases table top double zone induction Griddle XL constructed with 4 sides unique frame in AISI 304 2 mm thick. Non-stick smooth cooking plate (11 mm thick) is a compound of aluminium and AISI 436 stainless steel, for outstanding cooking uniformity. Integrated splash guard and grease collection drawer with 1,2 lt capacity. 2 independently controlled cooking zones to be combined with bridge function creating a single large surface. Glass touch display on top for maximum visibility with temperature setting (60 - 280°C). 2-color user interface (white and red) for better readability. Lock function stops your settings to be accidentally modified during working. Hot surface warning to prevent injuries. Cleaning function to set directly the right cooking surface temperature to activate Electrolux Professional rapid grease detergent. 4 feet, cord and plug included. IPx4 water protection. Designed for LiberoPro Duo function for automatic regulation of the LiberoPro Point fan speed according to cooking intensity.

Main Features

- Plug in unit designed for table top installations.
- 2-color user interface (white and red) for better readability.
- Outstanding cooking evenness and fast recovery time.
- Energy efficiency guaranteed by induction technology.
- Non-stick cooking plate.
- Glass touch display on top for maximum visibility with temperature indication.
- Temperature set from 60 to 280 °C with possibility of fine tuning of + or - 1 °C.
- 2 independently controlled cooking zones.
- BRIDGE FUNCTION allows to combine the two separate cooking zones to create a single large surface.
- Cleaning function: set the right cooking surface temperature to activate Electrolux Professional C40 Rapid Grease detergent.
- Safety first. Visual message displayed when the hob is still hot to prevent injuries.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.
- Designed for LiberoPro Duo function for automatic regulation of the LiberoPro Point fan speed according to cooking intensity.
- 11 mm cooking plate in 3 layers of :
 - AISI 436 stainless steel at the base
 - Aluminum in the center
 - AISI 436 on the surface
- Scraper, 4 feet, cord and plug included.

Construction

- 4 sides unique frame in AISI 304 2 mm thick.
- Integrated grease drain with drawer removable under the cooking surface.
- Grease collection drawer capacity 1,2 lt (for double zone model).
- Induction air filters easy to clean and remove for monthly cleaning.
- IPx4 water protection.


APPROVAL: _____




Electrolux
PROFESSIONAL

LiberoPro Plug-in induction Griddle XL, stainless steel smooth plate

Top




Side

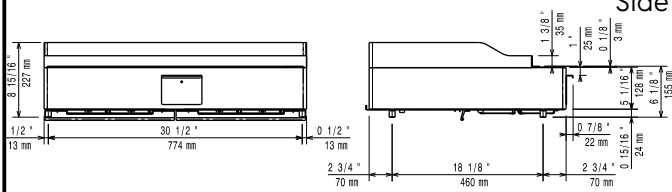

EI = Electrical inlet (power)
EO = Electrical Outlet

Other

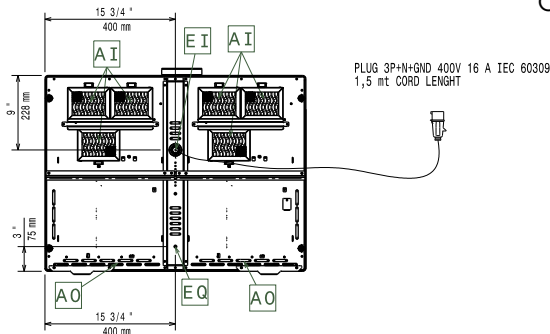

Electric

Supply voltage:

600887 (EIREDOMES) 380-415 V/3N ph/50-60 Hz

Total Watts:

7 kW

Plug type:

IEC/EN 60309-1/2

Minimum Circuit Ampacity
(MCA):

16A

Key Information:

Cooking surface size, (W/D): 790 / 410 mm

Working Temperature MIN: 60 °C

Working Temperature MAX: 280 °C

External dimensions, Width: 800 mm

External dimensions, Depth: 600 mm

External dimensions, Height: 227 mm

Net weight: 48 kg

The use of the provided grill scraper is recommended for cleaning operations.



LiberoPro
Plug-in induction Griddle XL, stainless steel smooth plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.05.07