

# Vegetable Slicer TrinityPro Combined Vegetable Slicer/ Cutter Mixer 3,6 Lt with sealed lid -Variable Speed

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



602229 (COM36SVS)

Combined Vegetable Slicer and Cutter Mixer 3.6 It with stainless steel bowl, sealed lid, variable speed 500-3600 rpm, Schuko plug

# **Short Form Specification**

#### Item No.

Combined Vegetable Slicer and Cutter Mixer with 3,6 litres, stainless steel bowl. Vegetable slicer ensures consistent cutting results thanks to the design patented lever-pusher. Constructed in a sturdy plastic material. 1,25 liters transparent half-moon hopper. Vegetables can be fed directly into the half moon hopper, a pusher presses the vegetables against the cutting discs ensuring an even cut in minimal time. 2 small hoppers for precise cuts on long vegetables dia. 55mm or 25mm. Ideal for grating, slicing/wavy slice, julienne and dicing.

Cutter Mixer transparent copolyester lid with sealed lid, scraper and central feed hole for adding products in mid-cycle. Microtoothed blade rotor. Angled blades and conical base of the bowl ensure consistent mixing. All ingredients are processed evenly and quickly thanks to a special flow generated inside the bowl.

No-volt release system prevents accidental start of the appliance. All parts in contact with food are removable and Dishwasher safe. Waterproof, easy to clean, flat, soft-touch buttons. Variable speed 500-3600 rpm. A smart speed control limits the speed when vegetable slicer attachment is installed. With Schuko plug.

## **Main Features**

- Combined appliance with two functions: vegetable slicer and cutter mixer.
- Equipped with vegetable slicer attachment for slicing, grating, shredding (julienne) as well as dicing and French fries cutting.
- Cutter mixer and emulsifier function included, for fast chopping, mixing, mincing, griding, liquidizing and kneading.
- Equipped with half moon hopper (1,25lt capacity) and 2 small round feed chutes: Ø 25mm and Ø 55mm, for precise slicing of long shaped vegetables.
- Uniform cuts and maximised load capacity, thanks to the design patented lever-pusher.
- Large output chute for efficient ejection. Fits up to 200mm high standard kitchen containers (like GN) under the output chute.
- Continuous feed model.
- Pulse function for quick and precise slicing and grating.
- Flexibility for high quality cuts: 9-level variable speed can be adjusted according to consistency of ingredients.
- Ergonomical frontal lever, suitable for left handed and right handed operators.
- Vegetable slicer blade stops when lever pusher is lifted for operator safety.
- Optional discs and grids available of various sizes for slicing, dicing, grating and shredding (diam. 175mm).
- Automatic speed limitation according to the selected function (slicer or cutter).
- Includes 3,6 liter stainless steel bowl with microtoothed blades rotor.
- Bowl/lid scraper included for uniform smooth results (emulsifying) and continuous working.
- All ingredients are processed evenly and quickly thanks to a special movement generated inside the bowl.
- Pulse function for coarse chopping.
- Easy to clean and waterproof control panel with flat on/off button and pulse function.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Productivity: up to 100 settings per service for vegetable slicer, up to 50 settings per service for cutter mixer function.
- ErgoCert 4-star certification for ergonomic design and ease of use.
- Transparent lid, with sealing to prevent leakage and with funnel shaped hole, to add ingredients during use.

#### APPROVAL:





# **Vegetable Slicer** TrinityPro Combined Vegetable Slicer/Cutter Mixer 3,6 Lt with sealed lid - Variable Speed

# Construction

- Bowl in AISI 304 stainless steel.
- Micro-toothed blades in 420 AISI stainless steel and ergonomic scraper in resistant composite material to ensure consistent mixing.
- IPX5 (IP55) waterproof, flat, touch-control panel.
- Main switch ON/OFF on the back of the appliance.
- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor
- Variable speed: 500 3600 rpm.
- Motor power: 750 Watt.
- Food safety assured in accordance to European directives and UK legislation. In addition, materials in contact with food, are BPA-free.
- Product safety conform to European directives, UK legislation and international health and safety standards.

# **Included Accessories**

•	1 of Ejector for Vegetable Slicer	PNC 650232
•	1 of Microtoothed blade rotor for 3.6It Cutter Mixer	PNC 650233
•	1 of Stainless steel bowl for 3.6lt Cutter Mixer	PNC 650235
•	1 of Scraper for 3.6lt Cutter Mixer bowl	PNC 650236
•	1 of Transparent lid for 3,6lt Cutter Mixer bowl with sealing and scraper	PNC 653862

Optional Accessories		
<ul> <li>Cleaning tool for 5-8-10 mm dicing grids</li> </ul>	PNC 650110	
• Transparent lid for 2,6lt Cutter Mixer bowl	PNC 650117	
<ul> <li>Transparent lid without sealing for 3,6lt Cutter Mixer bowl (1 speed models)</li> </ul>	PNC 650118	
• Kit including 3 discs dia. 175mm (slicer 2mm, slicer 5mm, grater 3mm)	PNC 650196	
Kit including 6 discs dia. 175mm (slicer 2mm, slicer 5mm, grater 3mm, grater 7mm, slicer 10mm, grid 10x10mm)	PNC 650197	
<ul> <li>Stainless steel grating disc 2 mm (dia. 175mm)</li> </ul>	PNC 650198	
• Stainless steel grating disc 3 mm	PNC 650199	

(ala. 17311111)		
<ul> <li>Stainless steel grating disc 7 mm (dia. 175mm)</li> </ul>	PNC 650207	
Parmesan Disc	PNC 650208	
Charles and a language along a line of the second	DNIC / F0000	

- Stainless steel shredding disc 2 mm PNC 650209 (dia. 175mm)
- Stainless steel shredding disc 4 mm PNC 650210 (dia. 175mm) • Stainless steel shredding disc 8 mm PNC 650211
- for French fries (dia. 175mm) • Stainless steel slicing disc 1 mm (dia. PNC 650213 175mm)
- Stainless steel slicing disc 2 mm (dia. PNC 650214 175mm)

• Stainless steel slicing disc 3 mm (dia. 175mm)	PNC	650215	
Stainless steel slicing disc 5 mm (dia. 175mm)	PNC	650216	
Stainless steel slicing disc 6 mm (dia. 175mm)	PNC	650217	
Stainless steel wavy slicing disc 3 mm (dia. 175mm)	PNC	650218	
Stainless steel wavy slicing disc 5 mm (dia. 175mm)	PNC	650219	
Aluminum slicing disc 8 mm (dia. 175mm)	PNC	650220	
<ul> <li>Aluminum slicing disc 10 mm (dia. 175mm)</li> </ul>	PNC	650221	
<ul> <li>Dicing grid 8x8 (dia 175mm)</li> <li>Dicing grid 10x10 (dia 175mm)</li> <li>Dicing kit 8mm (aluminum slicer 8mm, grid 8x8mm) (dia. 175mm)</li> </ul>	PNC	650222 650223 650224	<u> </u>
<ul> <li>Dicing kit 10mm (aluminum slicer 10mm, grid 10x10 mm) (dia. 175mm)</li> </ul>	PNC	650225	
<ul> <li>Microtoothed blade rotor for 2.6lt Cutter Mixer</li> </ul>	PNC	650226	
<ul> <li>Smooth blade rotor for 2.6lt Cutter Mixer</li> </ul>	PNC	650227	
<ul> <li>Stainless steel bowl for 2,6lt Cutter Mixer</li> <li>Transparent copolyester bowl for 2,6lt Cutter Mixer</li> </ul>		650228 650229	
<ul> <li>Scraper for 2.6lt Cutter Mixer bowl</li> <li>Stainless steel bowl for 2,6lt Cutter Mixer, microtoothed rotor, lid with scraper</li> </ul>		650230 650231	
<ul> <li>Ejector for Vegetable Slicer</li> <li>Microtoothed blade rotor for 3.6lt Cutter Mixer</li> </ul>		650232 650233	<u> </u>
Smooth blade rotor for 3.6lt Cutter Mixer	PNC	650234	
<ul> <li>Stainless steel bowl for 3.6lt Cutter Mixer</li> <li>Scraper for 3.6lt Cutter Mixer bowl</li> <li>Stainless steel slicing disc 4 mm (dia. 175mm)</li> <li>Transparent bowl for 2,6lt cutter mixer, microtoothed rotor, lid with scraper</li> <li>Support for 1 disc, diam. 175mm and 205mm</li> </ul>	PNC PNC PNC	650235 650236 650237 650245 653632	
<ul> <li>Transparent lid for 3,6lt Cutter Mixer bowl with sealing and scraper</li> </ul>	PNC	653862	
<ul> <li>Stainless steel bowl for 3,6lt Cutter Mixer, microtoothed rotor, sealed lid with scraper</li> </ul>	PNC	653864	



(dia. 175mm)

Stainless steel grating disc 4 mm











PNC 650205





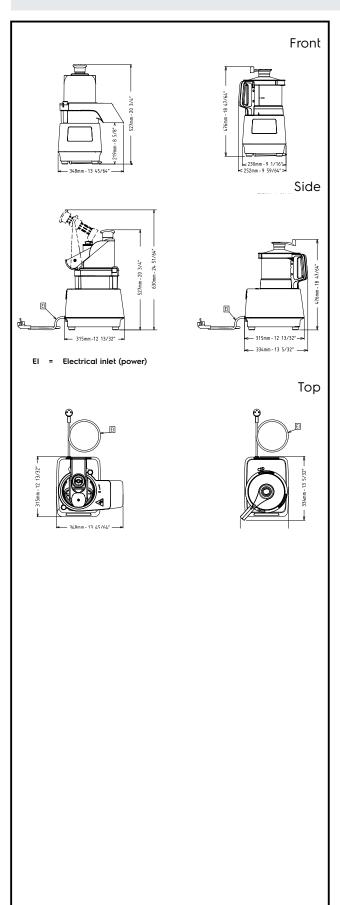

# Electric

Supply voltage:

602229 (COM36SVS) 220-240 V/1N ph/50/60 Hz

Electrical power max.: 0.75 kW Total Watts: 0.75 kW

Capacity:

Performance (up to): 150 kg/hour Capacity: 3.6 litres

**Key Information:** 

External dimensions, Width: 348 mm External dimensions, Depth: 315 mm External dimensions, Height: 527 mm

ISO 9001; ISO 14001 kg Shipping weight:







