



Dough Mixers 42lt Spiral Dough Kneader, 2 Speeds, removable bowl and tilting head



602355 (ESKTH42L)

42 lt spiral Dough Kneader
with tilting head and
removable bowl, 2 speed
(tool speed 84/168 rpm), on
wheels

Short Form Specification

Item No.

2 speed spiral dough kneader on wheels, with tilting head and motorized, removable bowl. Ideal for pizzeria, bakeries and pastries. Ingredients are kneaded with a stainless steel spiral mixer arm synchronised with bowl rotation. Body is in painted steel, the 42 lt capacity bowl, spiral mixer arm and dough breaker pin are in stainless steel. The safety screen allows ingredients to be added without stopping. Equipped with low voltage control panel with on/off switch, speed selection and timer (up to 30 min) or continuous mode. Safety device to stop the machine when the protection screen is opened. Tool speed: 84 and 168 rpm; bowl speed: 10 and 20 rpm. Maximum dough capacity: 17 kg per cycle (maximum 10,6 kg flour/cycle), with 60% hydration.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Spiral dough kneader with tilting head and motorized, removable bowl.
- Two speed kneading for faster cycles (tool speed: 84 and 168 rpm; bowl speed: 13 and 26 rpm).
- Ideal for kneading pizza dough, bread or similar dough.
- Maximum kneading capacity 33 kg per cycle (max. flour 20.6 kg/cycle), with 60% hydration.
- Central column for optimal kneading.
- Stainless steel (AISI304) squared dough breaker bar for fast and even kneading results
- Transparent protective screen to reduce flour dust release in the work area during kneading (EU EN453:2014) and to prevent dough contaminations.
- Minimum kneading capacity: 19 kg/cycle, with 60% hydratation.
- Safety device stops the appliance if the cover is openend.
- Equipped with 4 wheels, of which 2 with brakes, allowing to easily move the appliance for storage or cleaning.
- The appliance fits under standard kitchen worktops (see installation drawing).

Construction

- Additional bowl available as optional accessory.
- Constructed in painted steel.
- AISI304 stainless steel bowl, spiral hook and dough breaker bar.
- Control panel with on/off switch, speed selection and timer.
- Analogic timer up to 30 minutes or continuous mode.
- IP54 protected control panel.
- IP23 for the appliance overall.

Included Accessories

- 1 of 42 lt stainless steel bowl for tilting head spiral dough kneader PNC 653893


Optional Accessories

- 42 lt stainless steel bowl for tilting head spiral dough kneader PNC 653893 □

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com

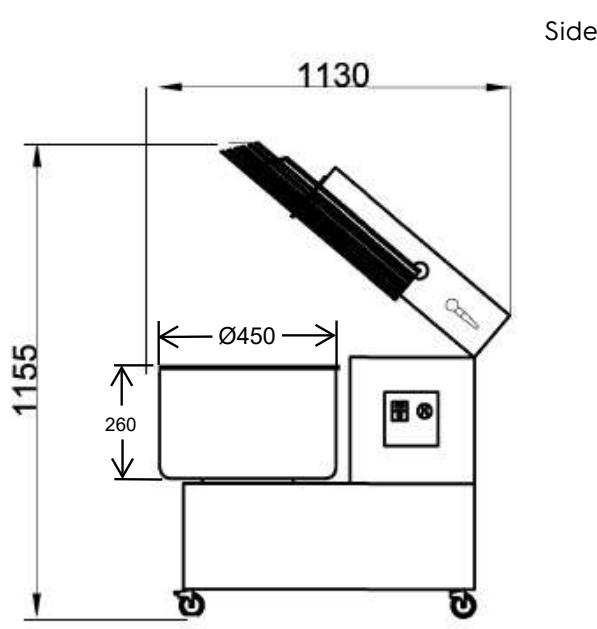
Electric


Supply voltage: 380-415V/3 ph/50 Hz
Total Watts: 3 kW

Capacity:

Maximum kneading (60% hydration): 33 kg/Cycle

Key Information:

External dimensions, Width: 480 mm
External dimensions, Depth: 840 mm
External dimensions, Height: 800 mm
Shipping weight: 125 kg
Bowl capacity: 42 lt

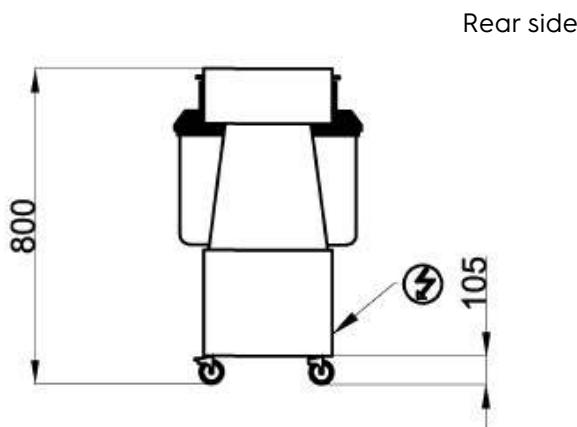

EI = Electrical inlet (power)

Top
