

## LiberoLight Induction Wok

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



602406 (E4HCCEOS)

Plug-in Induction Wok,  
squared, 3500W

### Short Form Specification

#### Item No. \_\_\_\_\_

Plug-in 1 phase induction wok. 4 mm thick glass-ceramic wok bowl cuvette. Glass touch control panel and digital LED display. Power levels settings, from 1 to 20. Hot surface warning to prevent injuries. Automatic pan recognition and rapid heat transfer directly to the pan. IP23 water protection. Cord and plug included. Dishwasher-safe air filters.

### Main Features

- Automatic pan detection to transfer power only when pan is present.
- High impact, heavy duty glass-ceramic wok bowl for durability and easy cleaning.
- Glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- Power level settings from 1 to 20.
- Safety first. Visual message displayed when the hob is still hot to prevent injuries.
- Self-diagnostics: an error code is displayed (Fxxx) in case of dysfunction.
- Plug in unit designed for table top installations.

### Construction

- One induction wok shaped bowl 4mm thick.
- IP23 protection index.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.
- Cord and plug included.

### Sustainability




- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).
- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.


### Optional Accessories

APPROVAL: \_\_\_\_\_

Front

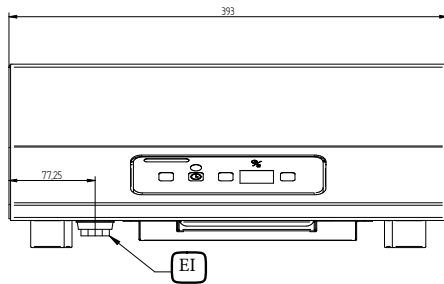


Side

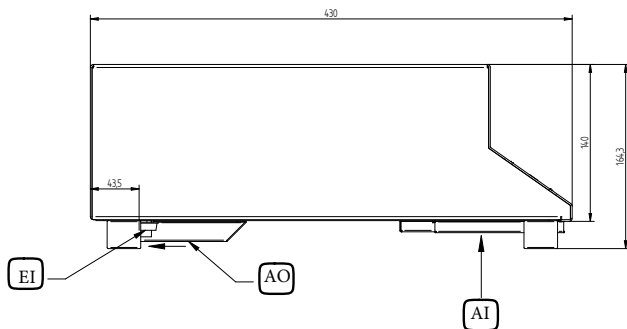

EI = Electrical inlet (power)  
 EO = Electrical Outlet

Top

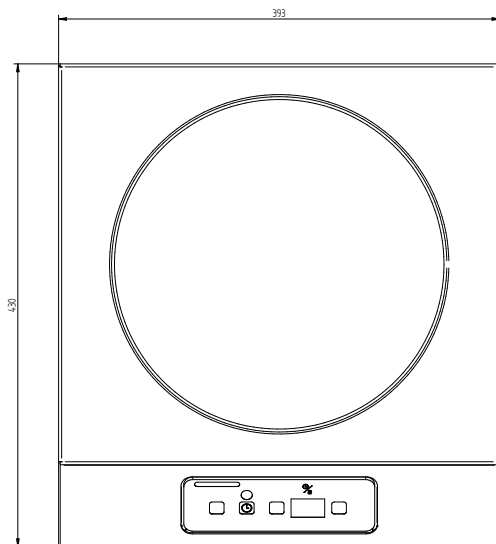

### Electric

|                                 |                          |
|---------------------------------|--------------------------|
| Supply voltage:                 | 220-240 V/1N ph/50/60 Hz |
| Total Watts:                    | 3.5 kW                   |
| Plug type:                      | CE-SCHUKO                |
| Minimum Circuit Ampacity (MCA): | 16A                      |

### Key Information:

|                              |        |
|------------------------------|--------|
| Top area width:              | 400 mm |
| Top area depth:              | 397 mm |
| External dimensions, Width:  | 393 mm |
| External dimensions, Depth:  | 430 mm |
| External dimensions, Height: | 165 mm |
| Net weight:                  | 10 kg  |