

## LiberoLight Induction Griddle, stainless steel smooth plate

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**602407 (E4IREEO)**

 Plug-in Induction Griddle,  
 crosswise, stainless steel  
 smooth plate, 6000W

### Short Form Specification

**Item No.** \_\_\_\_\_

Plug-in 3 phase induction griddle. Non-stick smooth cooking plate (6,9 mm thick) in stainless steel, multilayered with aluminium in the center. Integrated splash guard and grease collection drawer with 1,5 lt capacity. 2 independently controlled cooking zones. Glass touch control panel and digital LED display. Temperature settings (30 - 250°C). Hot surface warning to prevent injuries. Perfect cleaning with Electrolux Professional rapid grease detergent and included scraper. Cable without plug. Dishwasher-safe air filters.

### Main Features

- Glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- Temperature set from 30 to 250 °C.
- 2 independently controlled cooking zones.
- Exceptional responsiveness and rapid temperature recovery, allowing for precise control and consistent heat.
- Non-stick cooking plate.
- Cleaning function: set the right cooking surface temperature to activate Electrolux Professional C41 Rapid Grease detergent.
- Scraper included.
- Safety first. Visual message displayed when the cooking plate is still hot to prevent injuries.
- Self-diagnostics: an error code is displayed (Fxxx) in case of dysfunction.
- 6.9 mm cooking plate in stainless steel, multilayered with aluminum in the center.

### Construction

- Integrated grease drain with drawer removable under the cooking surface.
- Grease collection drawer capacity 1,5 lt.
- IP23 protection index.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.
- Cable without plug, suitable for single-phase and three-phase connection.

### Sustainability



- Energy efficiency guaranteed by induction technology.

### Recommended Detergents

- C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) PNC 0S2292 □


**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## LiberoLight Induction Griddle, stainless steel smooth plate

Front

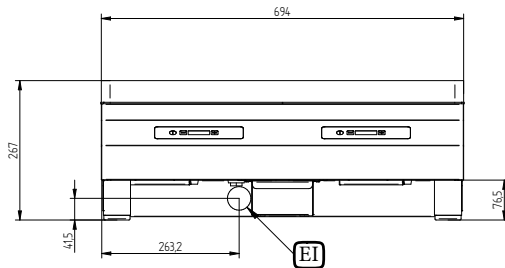


Side



EI = Electrical inlet (power)  
EO = Electrical Outlet

Top

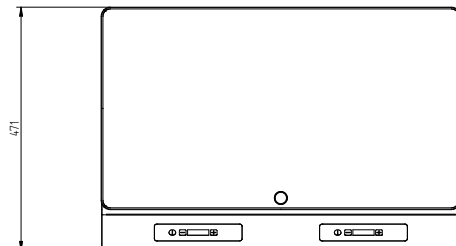

### Electric

|                                 |                          |
|---------------------------------|--------------------------|
| Supply voltage:                 | 380-400 V/3N ph/50/60 Hz |
| Predisposed for:                | 220-240V 1N 50/60        |
| Total Watts:                    | 6 kW                     |
| Plug type:                      | Cable without plug       |
| Minimum Circuit Ampacity (MCA): | 16A                      |

### Key Information:

|                              |              |
|------------------------------|--------------|
| Working Temperature MIN:     | 30 °C        |
| Working Temperature MAX:     | 250 °C       |
| External dimensions, Width:  | 695 mm       |
| External dimensions, Depth:  | 470 mm       |
| External dimensions, Height: | 267 mm       |
| Net weight:                  | 28 kg        |
| Cooking surface size, (W/D): | 688 / 384 mm |



LiberoLight  
Induction Griddle, stainless steel smooth plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.06.20