

## LiberoLight Induction Griddle, stainless steel smooth plate

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**602407 (E4IREEO)**

 Plug-in Induction Griddle,  
crosswise, stainless steel  
smooth plate, 6000W

### Short Form Specification

Item No. \_\_\_\_\_

Plug-in 3 phase induction griddle. Non-stick smooth cooking plate (6,9 mm thick) in stainless steel, multilayered with aluminium in the center. Integrated splash guard and grease collection drawer with 1,5 lt capacity. 2 independently controlled cooking zones. Glass touch control panel and digital LED display. Temperature settings (30 - 250°C). Hot surface warning to prevent injuries. Perfect cleaning with Electrolux Professional rapid grease detergent and included scraper. Cable without plug. Dishwasher-safe air filters.

### Main Features

- Glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- Temperature set from 30 to 250 °C.
- 2 independently controlled cooking zones.
- Exceptional responsiveness and rapid temperature recovery, allowing for precise control and consistent heat.
- Non-stick cooking plate.
- Cleaning function: set the right cooking surface temperature to activate Electrolux Professional C41 Rapid Grease detergent.
- Scraper included.
- Safety first. Visual message displayed when the cooking plate is still hot to prevent injuries.
- Self-diagnostics: an error code is displayed (Fxxx) in case of dysfunction.
- 6.9 mm cooking plate in stainless steel, multilayered with aluminum in the center.

### Construction

- Integrated grease drain with drawer removable under the cooking surface.
- Grease collection drawer capacity 1,5 lt.
- IP23 protection index.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.
- Cable without plug, suitable for single-phase and three-phase connection.

### Sustainability




- Energy efficiency guaranteed by induction technology.

### Recommended Detergents


- C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) PNC 0S2292 □

APPROVAL: \_\_\_\_\_

Front

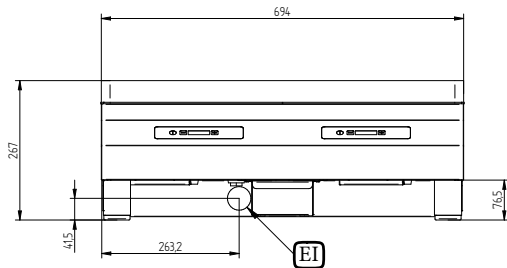


Side



EI = Electrical inlet (power)  
EO = Electrical Outlet

Top

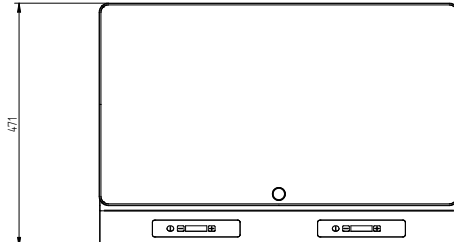

## Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
<p>Predisposed for:</p>	220-240V 1N 50/60
Total Watts:	6 kW
Plug type:	Cable without plug
Minimum Circuit Ampacity (MCA):	16A

## Key Information:

Working Temperature MIN:	30 °C
Working Temperature MAX:	250 °C
External dimensions, Width:	695 mm
External dimensions, Depth:	470 mm
External dimensions, Height:	267 mm
Net weight:	28 kg
Cooking surface size, (W/D):	688 / 384 mm