

LiberoLight Induction Griddle, stainless steel smooth plate

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


602407 (E4IREEO)

 Plug-in Induction Griddle,
 crosswise, stainless steel
 smooth plate, 6000W

Short Form Specification

Item No. _____

Plug-in 3 phase induction griddle. Non-stick smooth cooking plate (6,9 mm thick) in stainless steel, multilayered with aluminium in the center. Integrated splash guard and grease collection drawer with 1,5 lt capacity. 2 independently controlled cooking zones. Glass touch control panel and digital LED display. Temperature settings (30 - 250°C). Hot surface warning to prevent injuries. Perfect cleaning with Electrolux Professional rapid grease detergent and included scraper. Cable without plug. Dishwasher-safe air filters.

Main Features

- Glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- Temperature set from 30 to 250 °C.
- 2 independently controlled cooking zones.
- Exceptional responsiveness and rapid temperature recovery, allowing for precise control and consistent heat.
- Non-stick cooking plate.
- Cleaning function: set the right cooking surface temperature to activate Electrolux Professional C41 Rapid Grease detergent.
- Scraper included.
- Safety first. Visual message displayed when the cooking plate is still hot to prevent injuries.
- Self-diagnostics: an error code is displayed (Fxxx) in case of dysfunction.
- 6.9 mm cooking plate in stainless steel, multilayered with aluminum in the center.

Construction

- Integrated grease drain with drawer removable under the cooking surface.
- Grease collection drawer capacity 1,5 lt.
- IP23 protection index.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.
- Cable without plug, suitable for single-phase and three-phase connection.

Sustainability



- Energy efficiency guaranteed by induction technology.

Recommended Detergents

- C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) PNC 0S2292 □


APPROVAL: _____




Electrolux
PROFESSIONAL

LiberoLight Induction Griddle, stainless steel smooth plate

Front

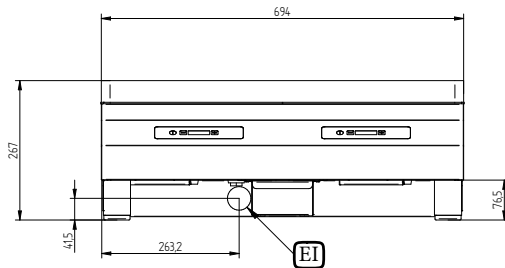


Side



EI = Electrical inlet (power)
EO = Electrical Outlet

Top

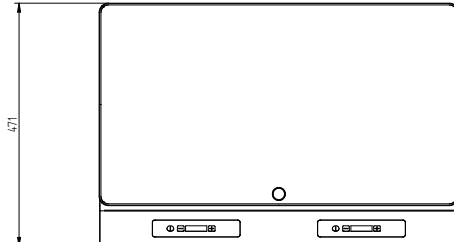

Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Predisposed for:	220-240V 1N 50/60
Total Watts:	6 kW
Plug type:	Cable without plug
Minimum Circuit Ampacity (MCA):	16A

Key Information:

Working Temperature MIN:	30 °C
Working Temperature MAX:	250 °C
External dimensions, Width:	695 mm
External dimensions, Depth:	470 mm
External dimensions, Height:	267 mm
Net weight:	28 kg
Cooking surface size, (W/D):	688 / 384 mm



LiberoLight
Induction Griddle, stainless steel smooth plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.15