

## LiberoLight Induction Cook Top, mono zone, drop-in

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**602408 (E4HDEDOS)**

 Plug-in Induction Cook Top,  
 squared, mono zone, drop-  
 in, 3000W

### Short Form Specification

Item No. \_\_\_\_\_

Plug-in 1 phase induction cook top designed for drop-in installation. Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness. Remote glass touch control panel and digital LED display. Power watts or temperature setting. Timer and Boost function to reach maximum power quickly. Hot surface warning to prevent injuries. Automatic pan recognition and rapid heat transfer directly to the pan. Suitable for pots and pans with diameter from 120 mm to 210 mm. IP23 water protection. Cord and plug included. Dishwasher-safe air filters.

### Main Features

- Automatic pan detection to transfer power only when pan is present.
- Remote glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- You can set either the power or the temperature, easily switching from one mode to the other.
- Power settings from 50W to 3000W.
- Temperature setting from 30°C to 250°C.
- Timer function can be used to set the cooking time, switching off the zone automatically at the end of the time set.
- Boost function to reach maximum power quickly.
- Self-diagnostics: an error code is displayed (Fxxx) in case of dysfunction.
- Plug in unit designed for drop in installations.
- Suitable for pot and pan with bottom diameter from 120 mm to 210 mm.

### Construction

- IP23 protection index.
- Cord and plug included.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.
- Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness.

### Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).
- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.


APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## LiberoLight Induction Cook Top, mono zone, drop-in

Front

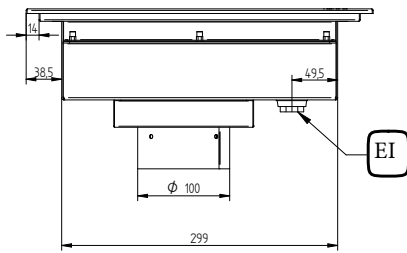


Side

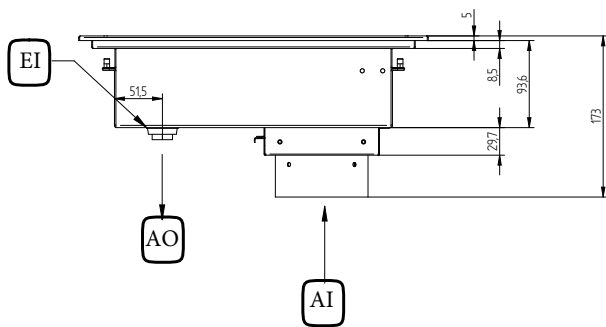

EI = Electrical inlet (power)  
EO = Electrical Outlet

Top

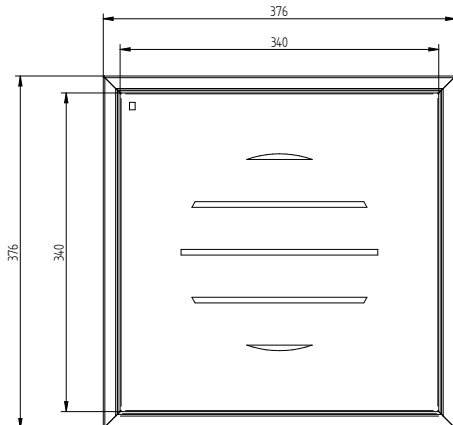

### Electric

|                                 |                          |
|---------------------------------|--------------------------|
| Supply voltage:                 | 220-240 V/1N ph/50/60 Hz |
| Total Watts:                    | 3 kW                     |
| Plug type:                      | CE-SCHUKO                |
| Minimum Circuit Ampacity (MCA): | 16A                      |

### Key Information:

|                              |        |
|------------------------------|--------|
| External dimensions, Width:  | 376 mm |
| External dimensions, Depth:  | 376 mm |
| External dimensions, Height: | 173 mm |
| Net weight:                  | 8 kg   |



LiberoLight  
Induction Cook Top, mono zone, drop-in

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.06