

**Coffee System**  
**Aura Traditional espresso machine, 3**  
**Maestro groups with Dosamat<sup>®</sup>,**  
**Steamair**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**602527 (AURA3DOSA)**

Traditional espresso machine, 3 Maestro groups, 15,6 liter boiler, 3 independent control boxes with 4 programmable dosing program with Dosamat<sup>®</sup> self recognition of portafilter

### Short Form Specification

#### Item No.

The professional semi-automatic AURA line owns all the technical features of a high-end traditional espresso machine, offering the perfect harmony of aesthetics and performance. With its modern design of stainless steel and chrome, the AURA displays an assertive silhouette underlined with LED lighting of the tray grill and around the electronic control boxes with touchscreen interface for an intuitive programming. AURA is dedicated to users familiar with volumetric commands that address high performance and consistency in the extraction process. The MAESTRO thermo-regulated brew groups are fitted with the EASYLOCK system that help locking and sealing the portafilter with minimal effort. The AURA line offers a set of advanced technologies that warrant an outstanding coffee extraction quality and a strong hot water/steam power.

### Main Features

- Steamair milk auto-frother programmable outlet.
- Automatic cleaning cycle.
- Programmable water.
- The professional semi-automatic AURA line owns all the technical features of a high-end traditional espresso machine, offering the perfect harmony of aesthetics and performance.
- Manual Steamglide lever.
- Modern design of stainless steel and chrome, the AURA displays an assertive silhouette underlined with LED lighting of the tray grill and around the electronic control boxes with touchscreen interface for an intuitive programming.
- AURA is dedicated to users familiar with volumetric commands that address high performance and consistency in the extraction process.
- The MAESTRO thermo-regulated brew groups are fitted with the EASYLOCK system that help locking and sealing the portafilter with minimal effort.
- 3 Maestro groups.
- 3 independent control boxes with 4 programmable dosing selection with Dosamat<sup>®</sup> self recognition of portafilter, start/stop, shot time display.
- Electronic pre infusion.
- Double paneled cup warmer with large capacity.
- USB interface for update.

### Construction

- Stainless steel body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.
- 15.6 liter boiler.
- Easylock portafilter.
- RS-232 protocol for computer/cashier interface.

### Included Accessories

- 1 of Aura filter holder for one cup PNC 871008
- 3 of Aura filter holder for two cups PNC 871009

### Optional Accessories

- Doser Coffee Grinder, flat, 65mm PNC 602543 ☐
- Doser Coffee Grinder, flat, 75mm PNC 602544 ☐
- Grind-on-demand Coffee Grinder, flat, 75mm PNC 602546 ☐

APPROVAL: \_\_\_\_\_



**Electrolux**  
PROFESSIONAL

**Coffee System**  
**Aura Traditional espresso machine, 3**  
**Maestro groups with Dosamat ®, Steamair**


- |  |            |                          |
|--|------------|--------------------------|
| • Aura filter holder for one cup   | PNC 871008 | <input type="checkbox"/> |
| • Aura filter holder for two cups  | PNC 871009 | <input type="checkbox"/> |
| • Side milk refrigerator 8 liter nominal capacity for up to 4 liter milk containers                      | PNC 871014 | <input type="checkbox"/> |
| • Side milk refrigerator 8 liter nominal capacity for up to 4 liter milk containers with digital display | PNC 871015 | <input type="checkbox"/> |
| • Filter for one cup, 12 gr  | PNC 871017 | <input type="checkbox"/> |
| • Filter for two cups, 18 gr   | PNC 871018 | <input type="checkbox"/> |
| • Stainless steel knock box drawer   | PNC 871019 | <input type="checkbox"/> |
| • Raised feet kit  | PNC 871041 | <input type="checkbox"/> |




**Electrolux**  
PROFESSIONAL

**Coffee System**  
**Aura Traditional espresso machine, 3**  
**Maestro groups with Dosamat<sup>®</sup>, Steamair**


Front

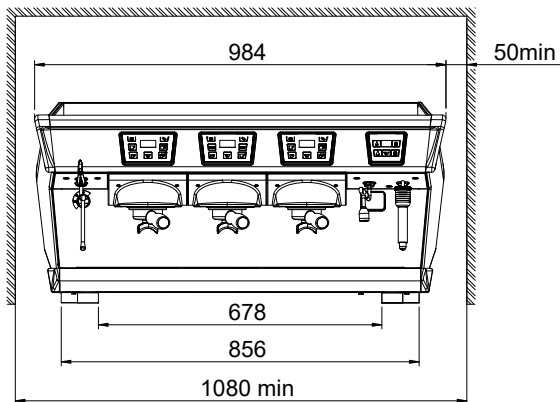

Side

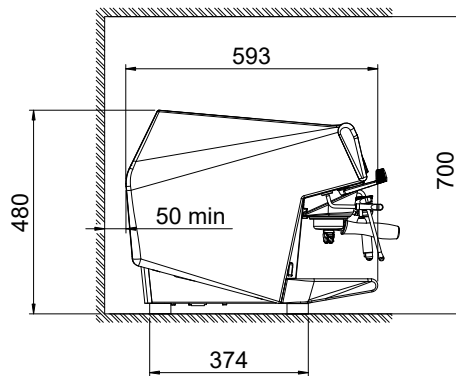

Top

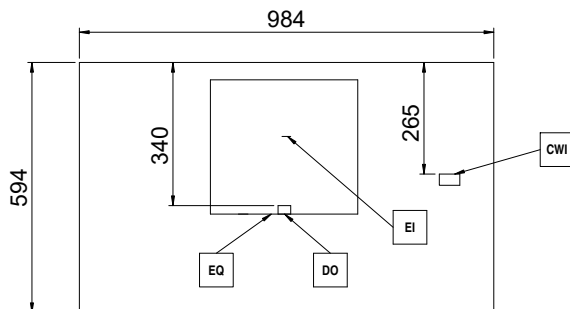

**Electric**

Supply voltage: 400 V/3N ph/50 Hz  
Electrical power, max: 4.8 kW  
Plug type: Cable without plug

**Water:**

Cold water temperature (min/max): 5 / 60 °C

**Key Information:**

Net weight: 83 kg  
Shipping volume: 0.83 m<sup>3</sup>

**Sustainability**

Current consumption: 7.2 Amps



**Coffee System**  
**Aura Traditional espresso machine, 3 Maestro groups with Dosamat<sup>®</sup>, Steamair**  
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.01