

## Coffee System

# TANGO SOLO ST, 1 group full-automatic machine, Steamair

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**602548 (TANGOSTISA)**

Full-automatic machine, 1 group, 270x40 ml espresso cup/hr, 6,5 liter steam/coffee boiler, 1x1,7 kg and 1x1,2 kg coffee hopper, programmable water, Steamair

### Short Form Specification

#### Item No.

The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality.

This high-end full automatic espresso coffee machine is able to create and compose a choice of 48 drinks menu, and delivers 2 drinks simultaneously operating water and steam: It impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.

Delivery Capacity :  
 Espresso 40ml : 270 cups/h  
 Lungo 100ml : 180 cups/h  
 Hot Water : 36 L/h

### Main Features

- The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality. It aims to automatically transform coffee and fresh milk into a variety of espresso beverages.
- 1 group full-automatic machine.
- 6.5 liter steam/coffee boiler.
- Auto cleaning program.
- Programmable hot water.
- Steamair milk auto-frother programmable outlet.
- The machine is able to create and compose a choice of 48 drinks menu and delivers 2 drinks simultaneously operating water and steam: it impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.
- Delivery Capacity:  
 Espresso 40ml: 270 cups/h  
 Lungo 100ml: 180 cups/h  
 Hot Water: 36 L/h

### Construction


- 2 coffee grinders (1 x 1,7 kg & 1 x 1,2 kg coffee hoppers).
- LCD Touchscreen.
- LED lights on body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.

### Optional Accessories


- Mixed hot water outlet for TANGO ST1 and STP PNC 871020
- TANGO hotel/breakfast service kit PNC 871022
- Coffee ground direct discharge chute PNC 871023
- Side milk refrigerator for up to 9 liter milk containers for TANGO ST PNC 871024
- Raised feet kit PNC 871041

APPROVAL: \_\_\_\_\_


Front

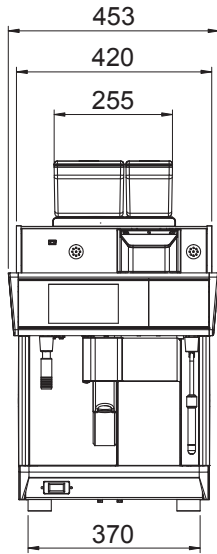

Side

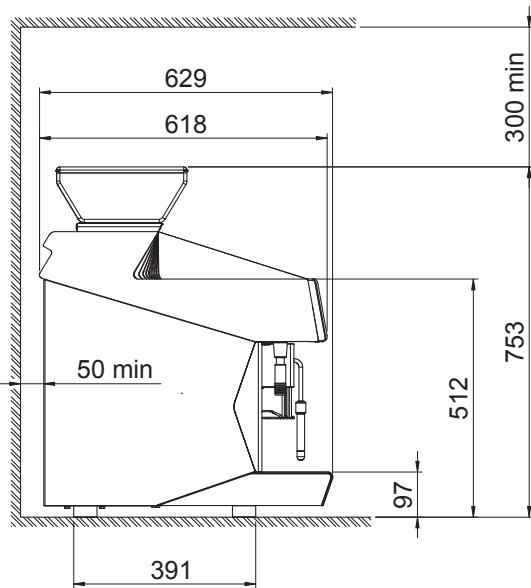

Top

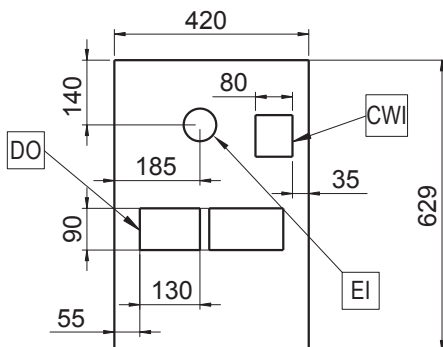

### Electric

Supply voltage:

602548 (TANGOSTISA) 400 V/3N ph/50 Hz

Electrical power max.:

5.2 kW

Plug type:

Cable without plug

### Water:

Cold water temperature

(min/max): 5 / 60 °C

### Key Information:

External dimensions, Width: 453 mm

External dimensions, Depth: 629 mm

External dimensions, Height: 833 mm

Net weight: 100 kg

Shipping volume: 0.69 m<sup>3</sup>

### Sustainability

Current consumption: 7.5 Amps