FROFESSIONAL

Coffee System TANGO SOLO ST, 1 group fullautomatic machine, Steamair



602548 (TANGOSTISA)

Full-automatic machine, 1 group, 270x40 ml espresso cup/hr, 6,5 liter steam/coffee boiler, 1x1,7 kg and 1x1,2 kg coffee hopper, programmable water, Steamair

Short Form Specification

Item No.

The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality.

This high-end full automatic espresso coffee machine is able to create and compose a choice of 48 drinks menu, and delivers 2 drinks simultaneously operating water and steam: It impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.

Delivery Capacity : Espresso 40ml : 270 cups/h Lungo 100ml : 180 cups/h Hot Water : 36 L/h

ITEM #		
MODEL #		
NAME #		
SIS #	 	
AIA #	 	

Main Features

- The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality. It aims to automatically transform coffee and fresh milk into a variety of espresso beverages.
- 1 group full-automatic machine.
- 6.5 liter steam/coffee boiler.
- Auto cleaning program.
- Programmable hot water.
- Steamair milk auto-frother programmable outlet.
- The machine is able to create and compose a choice of 48 drinks menu and delivers 2 drinks simultaneously operating water and steam: it impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.
- Delivery Capacity: Espresso 40ml: 270 cups/h Lungo 100ml: 180 cups/h Hot Water: 36 L/h

Construction

- 2 coffee grinders (1 x 1,7 kg & 1 x 1,2 kg coffee hoppers).
- LCD Touchscreen.
- LED lights on body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.


Optional Accessories

- Mixed hot water outlet for TANGO STI and STP
 PNC 871020
- TANGO hotel/breakfast service PNC 871022 🗆 kit
- Coffee ground direct discharge PNC 871023
 chute
- Side milk refrigerator for up to 9 PNC 871024 liter milk containers for TANGO ST
- Raised feet kit PNC 871041 🗅

APPROVAL:

Electrolux PROFESSIONAL

Coffee System TANGO SOLO ST, 1 group fullautomatic machine, Steamair

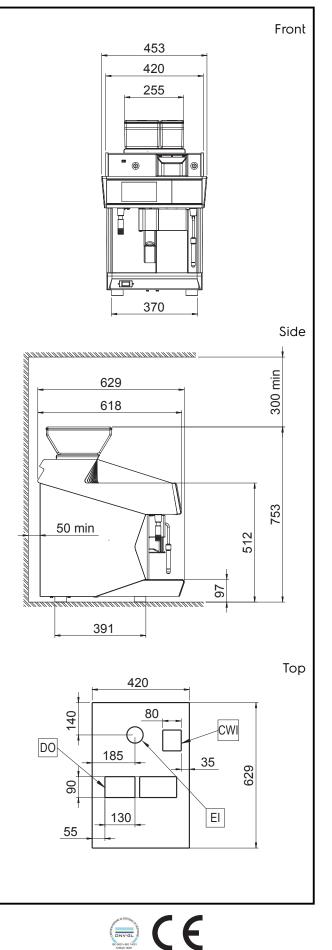

Electric				
Supply voltage: 602548 (TANGOSTISA) Electrical power max.: Plug type:	400 V/3N ph/50 Hz 5.2 kW Cable without plug			
Water:				
Cold water temperature (min/max):	5/60 °C			
Key Information:				
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight: Shipping volume:	453 mm 629 mm 833 mm 100 kg 0.69 m³			
Sustainability				
Current consumption:	7.5 Amps			

Coffee System TANGO SOLO ST, 1 group full-automatic machine, Steamair

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.