

## Coffee System

### TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore, Steamair

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**602551 (TANGOST2SA)**

Full-automatic machine, 2 groups, 440x40 ml espresso cup/hr, 2x6,5 liter steam/coffee boiler, 2x1,7 kg coffee hopper, programmable water, Steamair, 1 Tango Cappuccinatore device with double function L: for hot milk and C: for foam by air injection

### Short Form Specification

#### Item No.

The super automatic coffee machine Tango® ST Duo has two separate 7" screens to control the patented TANGO® double group head with its international recognized reliability.

This high-end full automatic espresso coffee machine is able to create and compose a choice of 96 drinks menu, and delivers 4 drinks simultaneously: the Tango® ST Duo is the unique machine of the automatic machines market offering such level of performance with the warranty of an exceptional extraction quality.

With a minimum 60cm width for a 2 groups super automatic coffee machine, the Tango® ST Duo is the ideal unit for businesses aiming to automatically transform coffee and fresh milk into a variety of espresso coffee beverages.

Delivery Capacity :

Espresso 40ml : 440 cups/h  
 Lungo 100ml : 300 cups/h  
 Hot Water : 56 L/h  
 Cappuccino 100ml: 240 cups/h  
 Latte100ml: 180 cups/h

### Main Features

- 1 x Tango Cappuccinatore device with double feature L: for hot milk and C: for foam by air injection.
- 2 groups full-automatic machine
- 2 x 6.5 liter steam/coffee boiler.
- Programmable hot water.
- Steamair milk auto-frother programmable outlet.
- The machine is able to create and compose a choice of 96 drinks menu and delivers 4 drinks simultaneously: the Tango® ST Duo is the unique machine of the automatic machines market offering such level of performance with the warranty of an exceptional extraction quality.
- The super automatic coffee machine Tango® ST Duo has two separate 7" screens to control the patented TANGO® double group head with its international recognized reliability.
- With a minimum 60cm width for a 2 groups super automatic coffee machine, the Tango® ST Duo is the ideal unit for businesses aiming to automatically transform coffee and fresh milk into a variety of espresso coffee beverages.
- Delivery Capacity:  
 Espresso 40ml: 440 cups/h  
 Lungo 100ml: 300 cups/h  
 Hot Water: 56 L/h  
 Cappuccino 100ml: 240 cups/h  
 Latte 100ml: 180 cups/h
- 2 coffee grinders (2 x 1,7 kg coffee hoppers).
- To obtain milk based beverages, the side milk refrigerator is needed.

### Construction

- LCD Touchscreen.
- LED lights on body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.

### Optional Accessories

- Mixed hot water outlet for TANGO ST1 and STP PNC 871020
- TANGO hotel/breakfast service kit PNC 871022
- Coffee ground direct discharge chute PNC 871023
- Side milk refrigerator for up to 9 liter milk containers for TANGO ST PNC 871024
- Raised feet kit PNC 871041


**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## Coffee System TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore, Steamair


Front

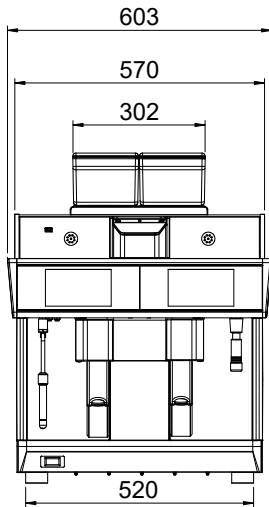

Side

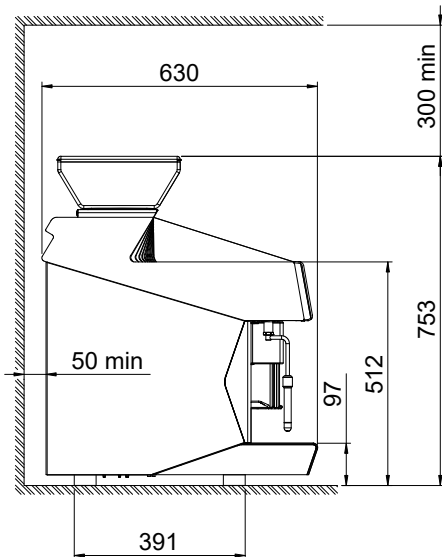

Top

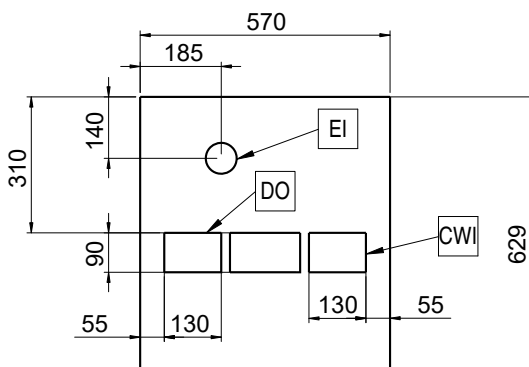

### Electric

Supply voltage:

602551 (TANGOST2SA) 400 V/3N ph/50 Hz

Electrical power max.:

8 kW

Plug type:

Cable without plug

### Water:

Cold water temperature

(min/max): 5 / 60 °C

### Key Information:

External dimensions, Width: 603 mm

External dimensions, Depth: 629 mm

External dimensions, Height: 752 mm

Net weight: 129 kg

Shipping volume: 0.69 m<sup>3</sup>

### Sustainability

Current consumption:

23.3 Amps



Coffee System  
TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore,  
Steamair  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2024.04.09