

## Coffee System TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore, Steamair

| TEM #   |  |
|---------|--|
| 10DEL # |  |
| IAME #  |  |
| ilS #   |  |
|         |  |
| AIA #   |  |



#### 602551 (TANGOST2SA)

Full-automatic machine, 2 groups, 440x40 ml espresso cup/hr, 2x6,5 liter steam/coffee boiler, 2x1,7 kg coffee hopper, programmable water, Steamair, 1 Tango Cappuccinatore device with double function L: for hot milk and C: for foam by air injection

### **Short Form Specification**

#### Item No.

The super automatic coffee machine Tango® ST Duo has two separate 7" screens to control the patented TANGO® double group head with its international recognized reliability.

This high-end full automatic espresso coffee machine is able to create and compose a choice of 96 drinks menu, and delivers 4 drinks simultaneously: the Tango\* ST Duo is the unique machine of the automatic machines market offering such level of performance with the warranty of an exceptional extraction quality.

With a minimum 60cm width for a 2 groups super automatic coffee machine, the Tango\* ST Duo is the ideal unit for businesses aiming to automatically transform coffee and fresh milk into a variety of espresso coffee beverages.

Delivery Capacity : Espresso 40ml : 440 cups/h Lungo 100ml : 300 cups/h Hot Water : 56 L/h

Cappuccino 100ml: 240 cups/h Latte100ml: 180 cups/h

#### **Main Features**

- 2 coffee grinders (2 x 1,7 kg coffee hoppers).
- 1 x Tango Cappuccinatore device with double feature L: for hot milk and C: for foam by air injection.
- 2 groups full-automatic machine
- 2 x 6.5 liter steam/coffee boiler.
- Programmable hot water.
- Steamair milk auto-frother programmable outlet.
- The machine is able to create and compose a choice of 96 drinks menu and delivers 4 drinks simultaneously: the Tango® ST Duo is the unique machine of the automatic machines market offering such level of performance with the warranty of an exceptional extraction quality.
- The super automatic coffee machine Tango® ST Duo has two separate 7" screens to control the patented TANGO® double group head with its international recognized reliability.
- With a minimum 60cm width for a 2 groups super automatic coffee machine, the Tango® ST Duo is the ideal unit for businesses aiming to automatically transform coffee and fresh milk into a variety of espresso coffee beverages.
- Delivery Capacity: Espresso 40ml: 440 cups/h Lungo 100ml: 300 cups/h Hot Water: 56 L/h Cappuccino 100ml: 240 cups/h Latte 100ml: 180 cups/h
- To obtain milk based beverages, the side milk refrigerator is needed.

#### Construction

- LCD Touchscreen.
- LED lights on body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.


#### Optional Accessories

| <ul> <li>Mixed hot water outlet for<br/>TANGO STI and STP</li> </ul>        | PNC 871020 |  |
|---|------------|--|
| • TANGO hotel/breakfast service kit   | PNC 871022 |  |
| • Coffee ground direct discharge chute                                      | PNC 871023 |  |
| Side milk refrigerator for up to 9<br>liter milk containers for TANGO<br>ST | PNC 871024 |  |
| Raised feet kit   | PNC 871041 |  |

#### APPROVAL:





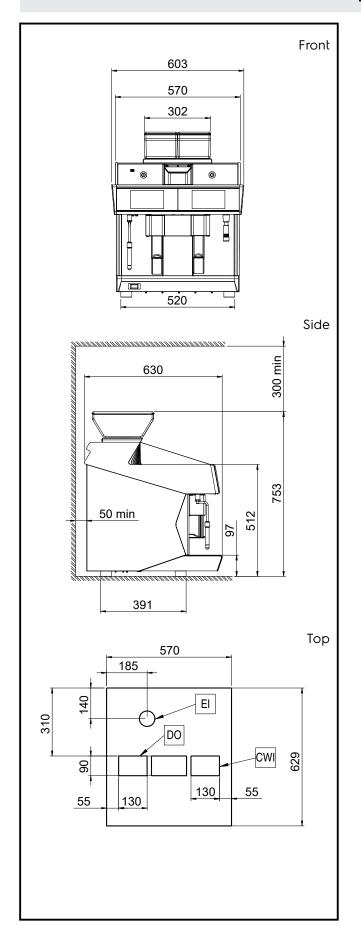

Coffee System
TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore,
Steamair
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.



# Coffee System TANGO DUO ST, 2 groups full-automatic machine with Cappuccinatore, Steamair

Electric

Supply voltage: 400 V/3N ph/50 Hz

Electrical power max: 5.2 kW

Plug type: Cable without plug

Water:

Cold water temperature

5 / 60 °C (min/max):

**Key Information:** 

Net weight: 130 kg 0.69 m<sup>3</sup> Shipping volume:

Sustainability

Current consumption: 7.5 Amps

