

## Coffee System

### TANGO ACESELF, 1 group full-automatic machine

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**602557 (TANGOACEISELF)** Full-automatic machine, 1 group, 220x40 ml espresso cup/hr, 6,5 liter steam/coffee boiler, 1x1,7 kg and 1x1,2 kg coffee hopper, hot water

#### Short Form Specification

**Item No.** \_\_\_\_\_

The Tango® ACE fully takes advantage of the reliability, usability and exceptional extraction quality that has established the reputation of the TANGO® range.

In its Self version, the Tango® ACE comes with lockers for bean hoppers and waste coffee drawer, it has no steam outlet neither ground coffee box for security reason. The Tango® ACE Self version is ideal for using in all self-service areas with its self-explanatory 7" color touch screen user interface easy to use.

With the addition of the Cappuccinatore device, the Tango® ACE Self offers the choice of fresh milk-based beverages at the push of a button.

#### Main Features

- 1 group full-automatic machine with self service configuration.
- 6.5 liter steam/coffee boiler.
- Auto cleaning program.
- In its Self version, the Tango® ACE comes with lockers for bean hoppers and waste coffee drawer, it has no steam outlet neither ground coffee box for security reason. The Tango® ACE Self version is ideal for using in all self-service areas with its self-explanatory 7" color touch screen user interface easy to use.
- Programmable hot water.
- The Tango® ACE fully takes advantage of the reliability, usability and exceptional extraction quality that has established the reputation of the TANGO® range.

#### Construction

- 2 coffee grinders (1 x 1,7 kg & 1 x 1,2 kg coffee hoppers).
- LCD Touchscreen.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.
- Safety locks.

#### Optional Accessories

- TANGO hotel/breakfast service kit PNC 871022 ☐
- Coffee ground direct discharge chute PNC 871023 ☐
- Raised feet kit PNC 871041 ☐

**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

**Coffee System**  
**TANGO ACESELF, 1 group full-**  
**automatic machine**


Front



Side

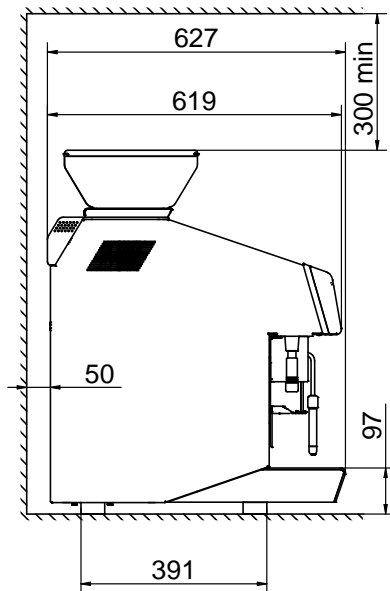

Top

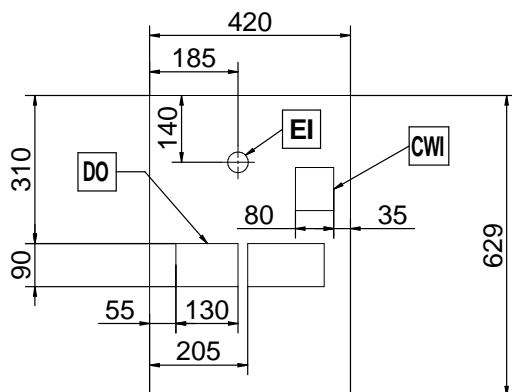

**Coffee System**  
**TANGO ACESELF, 1 group full-automatic machine**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.16

**Electric**

Supply voltage: 400 V/3N ph/50 Hz  
Electrical power, max: 5.2 kW  
Plug type: Cable without plug

**Water:**

Cold water temperature  
(min/max): 5 / 60 °C

**Key Information:**

Net weight: 103 kg  
Shipping volume: 0.7 m<sup>3</sup>

**Sustainability**

Current consumption: 7.5 Amps