

## High Speed Equipment GourmeXpress High Speed Oven, black 230V-50Hz (Schuko Plug)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**603955**  
(EPRPROSITEU)

GourmeXpress High Speed Oven (3.5 kW)  
with single magnetron 230V/1N/50Hz -  
Schuko plug

### Short Form Specification

#### Item No. \_\_\_\_\_

Table top GourmeXpress High-Speed Oven uses the combination of microwave, convection and hot air impingement for rapid and consistent cooking results with a wide range of products. Ventless solution guarantees flexibility of installation (see handbook for more details). Convection power of 3 kW, Microwave power 1.1 kW, Total Power of 3.5 kW. 5" capacitive touchscreen display is easy to use and can be configured according to user needs. It is possible to program and memorize up to 1024 recipes, grouping them in different clusters for easy use (for example, breakfast, lunch, dinner). 17 liters cavity in AISI 304 stainless steel with rounded edges easy to clean. Predisposed for USB memory stick data transfer. Front of house robust and durable design with cool to touch exterior surfaces and ergonomic handle. Ideal solution for customers like (Quick service restaurants, Coffee bars, Hotels, Service Stations, Retail, etc.) where speed of service, ease of use and consistent results are a priority.

### Main Features

- GourmeXpress High Speed Oven is the solution for fast and consistent cooking (and reheating) results on different types of products for complete meals (frozen products, breaded products, proteins) but also pastry, hot snacks, appetisers, and much more.
- GourmeXpress guarantees high speed cooking results thanks to the combination of :
  - Convection
  - Microwave
  - Impingement (hot air jets)
- Ventless equipment, can be installed without extraction hood. Perfect for front house cooking (see handbook for more details).
- Adjustable temperature control from 30°C to 280°C.
- Adjustable impingement speed from 10% to 100% with 10% increment.
- Adjustable microwave power from 0% to 100% with 10% increment. With 0% microwave it can be used as a convection oven.
- Easy to use 5" capacitive touchscreen user interface where up to 1024 recipes can be stored.
- It is possible to create multiphase recipes with different combinations of temperature, microwave and impingement for each phase.
- For easier recipe management each recipe can be linked to:
  - a dedicated session (i.e. breakfast, lunch, dinner, etc.)
  - a customized image
  - a bar code, to be retrieved with a bar code scanner (available as an optional accessory PNC 653820)
- Countdown display and buzzer with adjustable volume at the end of the cycle (or phase in case of multiphase recipes).
- Prearranged for USB memory stick data transfer.

### Construction

- AISI 304 stainless steel cooking chamber with all rounded corners for easy cleaning.
- Shovel shelf rack on top of the oven.
- Compact footprint with a wide 17-liter cooking chamber.
- Removable easy to clean top and bottom hot air jet plates.
- Catalytic filters, removable and replaceable.
- Easy to access air filter.
- Ergonomic door handle.
- 2" adjustable feet.
- IPX3 protected.

APPROVAL: \_\_\_\_\_

**Included Accessories**

- 1 of Teflon tray for GourmeXpress High Speed Oven PNC 653816
- 1 of Teflon mesh basket for GourmeXpress High Speed Oven PNC 653817
- 1 of Aluminium shovel for GourmeXpress High Speed Oven PNC 653819


**Optional Accessories**

- Bluetooth printer for 50x60mm labels, display in English or Italian. To be managed via dedicated app. PNC 650243 ☐
- Barcode scanner for GourmeXpress High Speed Oven PNC 653820 ☐


**Recommended Detergents**

- S02 Degreaser for ovens and SpeedDelight. Specific for cleaning the cooking chambers of GourmeXpress and SpeedDelight. Active up to a maximum of 50°C Complete with spray bottle Pack of 6 750ml bottles PNC 0S2882 ☐

Front




Side




EI = Electrical inlet (power)  
 EO = Electrical Outlet

Top



Distances

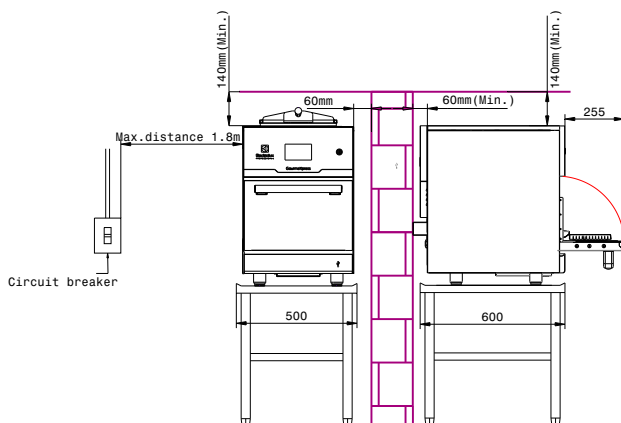

### Electric

Supply voltage:	220-240 V/1N ph/50 Hz
Rated amps:	15.2 A
Total Watts:	3.5 kW
Plug type:	CE-SCHUKO

### Installation:

Clearance: 60 mm from side, 140 mm from top

### Key Information:

Net Volume:	17 lt
Power details:	
Oven working Temperature:	30 °C MIN; 280 °C MAX
Oven Cavity Dimensions (width):	305 mm
Oven Cavity Dimensions (height):	185 mm
Oven Cavity Dimensions (depth):	305 mm
External dimensions, Width:	460 mm
External dimensions, Depth:	710 mm
External dimensions, Height:	660 mm
Net weight:	68 kg
Shipping weight:	89 kg
Shipping height:	760 mm
Shipping width:	580 mm
Shipping depth:	770 mm
Shipping volume:	0.34 m <sup>3</sup>
Information:	Total Power: 3.5 kW Power of Microwave: 1.1 kW - 1 magnetron Power of convection: 3 kW
Controls:	5" Capacitive Touchscreen Display 1024 Cooking Programs