

Modular Cooking Range Line 700XP 1 Well Freestanding El. Fryer 14 liter - Marine

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



371162 (E7FRMD1FF5)

14-It electric Fryer free standing with 1 well (internal heating elements), 1 basket and lid included - Marine

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency tilting incolor armoured heating elements (8.7kW) placed inside the well. Deep drawn well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Incoloy armoured heating elements located inside the well can be lifted up for easier
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Unit to be mounted on height adjustable feet in stainless steel.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



• This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Included Accessories

 1 of Flanged feet kit 	PNC 206136
 1 of Door for open base cupboard 	PNC 206350
• 1 of 1 full size basket for 14/151 frvers	t PNC 921691

Optional Accessories		
 Junction sealing kit 	PNC 206086	
 Flanged feet kit 	PNC 206136	
• Frontal kicking strip for concrete installation, 400mm	PNC 206147	
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175	
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	

APPROVAL:






Modular Cooking Range Line 700XP 1 Well Freestanding El. Fryer 14 liter - Marine

• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
 Pair of side kicking strips 	PNC 206249	
Electric heating kit for cupboards	PNC 206259	
Pair of side kicking strips for concrete installation	PNC 206265	
Right and left side handrails	PNC 206307	
Back handrail 800 mm	PNC 206308	
Back handrail 1200 mm	PNC 206309	
 Door for open base cupboard 	PNC 206350	
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367	
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368	
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
• Rear paneling - 600mm (700/900XP)	PNC 206373	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
 Chimney grid net, 400mm (700XP/900) 	PNC 206400	
 Base support for feet or wheels - 600mm (700/900) 	PNC 206431	
 2 side covering panels for free standing appliances 	PNC 216000	
• 1 full size basket for 14/15lt fryers	PNC 921691	
• 2 half size baskets for 14/15lt fryers	PNC 921692	
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	





Modular Cooking Range Line 700XP 1 Well Freestanding El. Fryer 14 liter - Marine

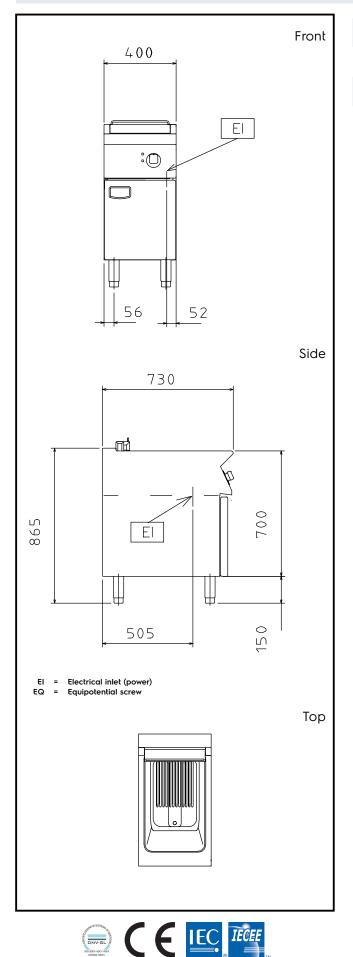

Electric

Supply voltage: 380-400 V/3 ph/50/60 Hz

Electrical power, max: 8.7 kW

Key Information:

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 285 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 12 lt MIN; 14 lt MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

External dimensions, Width: 400 mm
External dimensions, Depth: 730 mm
External dimensions, Height: 850 mm
Net weight: 35 kg
Certification group: EFI7114
Waterproof index: IPX4

