



Modular Cooking Range Line 700XP One Well Freestanding Electric Fryer 7 liter

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



371077 (E7FRED1BF0)

7-lt electric Fryer free standing with 1 "V" shape well (external heating elements), 1 basket and lid included

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency infrared heating elements (5.4kW) attached to the outside of the well. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Melting function to safely heat-up solid shortening used to fry products. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- High efficiency infrared heating elements are attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



Included Accessories

- 1 of Door for open base cupboard PNC 206350
- 1 of Basket for 7lt top and free standing fryers PNC 921608

Optional Accessories


• Junction sealing kit	PNC 206086 <input type="checkbox"/>
• Flanged feet kit	PNC 206136 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 400mm	PNC 206147 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 800mm	PNC 206148 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152 <input type="checkbox"/>
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175 <input type="checkbox"/>

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

- Frontal kicking strip, 800mm (not for refr-freezer base) PNC 206176
- Frontal kicking strip, 1000mm (not for refr-freezer base) PNC 206177
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179
- Kit 4 feet for concrete installation (not for 900 line free standing grill) PNC 206210
- Central support for installation of drawers and grid (on 800/1200mm bases) and of doors (on 1200mm bases) PNC 206245
- Pair of side kicking strips PNC 206249
- Pair of side kicking strips for concrete installation PNC 206265
- Chimney upstand, 400mm PNC 206303
- Right and left side handrails PNC 206307
- Back handrail 800 mm PNC 206308
- Door for open base cupboard PNC 206350
- Base support for feet or wheels - 400mm (700/900) PNC 206366
- Base support for feet or wheels - 800mm (700/900) PNC 206367
- Base support for feet or wheels - 1200mm (700/900) PNC 206368
- Base support for feet or wheels - 1600mm (700/900) PNC 206369
- Base support for feet or wheels - 2000mm (700/900) PNC 206370
- Rear paneling - 600mm (700/900XP) PNC 206373
- Rear paneling - 800mm (700/900) PNC 206374
- Rear paneling - 1000mm (700/900) PNC 206375
- Rear paneling - 1200mm (700/900) PNC 206376
- Chimney grid net, 400mm (700XP/900) PNC 206400
- Base support for feet or wheels - 600mm (700/900) PNC 206431
- 2 side covering panels for free standing appliances PNC 216000
- Basket for 7lt top and free standing fryers PNC 921608
- Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers PNC 921693

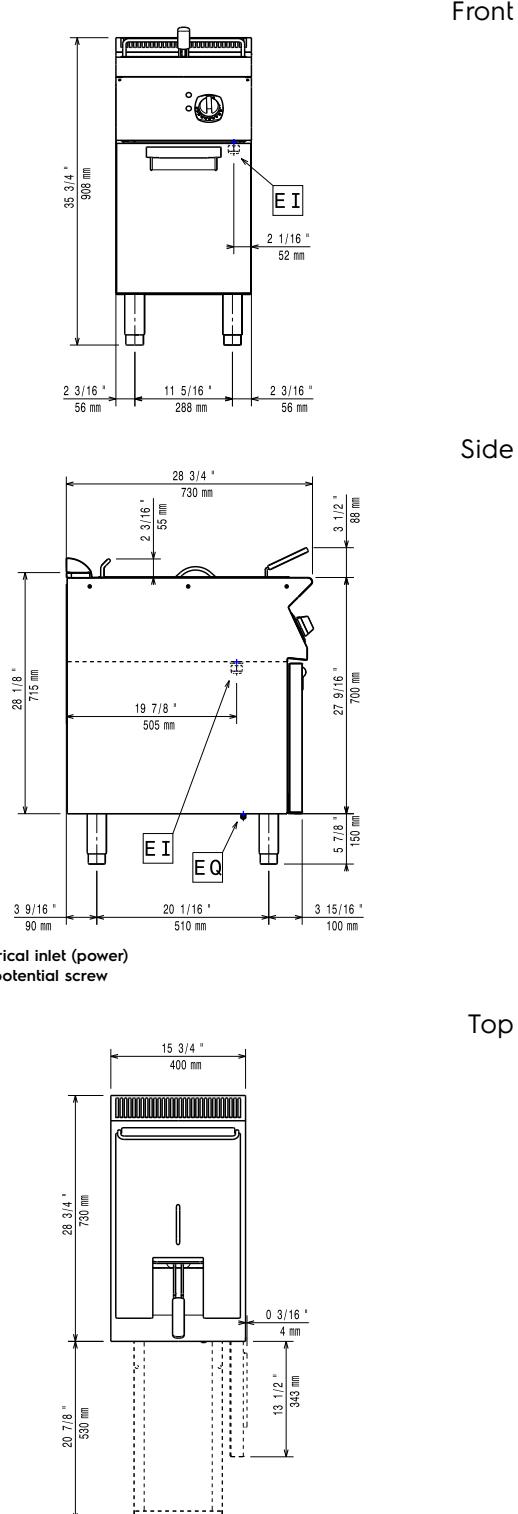

EI = Electrical inlet (power)
EQ = Equipotential screw

Electric

380-400 V/3N ph/50-60 Hz

Supply voltage:

Predisposed for:

Total Watts: 5.4 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): 240 mm

Usable well dimensions (height): 235 mm

Usable well dimensions (depth): 380 mm

Well capacity: 5.5 lt MIN; 7 lt MAX

Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 40 kg

Shipping weight: 48 kg

Shipping height: 1130 mm

Shipping width: 460 mm

Shipping depth: 820 mm

Shipping volume: 0.43 m³

Certification group: EFE7IM07

Modular Cooking Range Line
700XP One Well Freestanding
Electric Fryer 7 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.02.11