

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



371068 (E7FRGD1BF0)

7-It gas Fryer free standing with 1 "V" shape well (external burners), 1 basket and lid included

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- High efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Included Accessories

• 1 of Door for open base PNC 206350 cupboard

 1 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

concrete installation, 400mm

Junction sealing kit
 Draught diverter, 120 mm diameter
 Matching ring for flue condenser, 120 mm diameter
 Flanged feet kit
 Frontal kicking strip for
 PNC 206126 □
 PNC 206127 □
 PNC 206136 □
 PNC 206147 □

APPROVAL:






Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter

 Frontal kicking strip for concrete installation, 800mm 	PNC 206148		Pressure regulator for gas units	PNC 927225	
 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150				
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151				
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152				
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175				
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176				
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177				
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178				
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179				
 Kit 4 feet for concrete installation (not for 900 line free standing grill) 	PNC 206210				
Pair of side kicking strips	PNC 206249				
 Pair of side kicking strips for concrete installation 	PNC 206265				
 Chimney upstand, 400mm 	PNC 206303				
Right and left side handrails	PNC 206307				
•	PNC 206308				
Back handrail 800 mm					
 Flue condenser for 1/2 module, 120 mm diameter 	PNC 206310				
 Door for open base cupboard 	PNC 206350				
 Base support for feet or wheels - 400mm (700/900) 	PNC 206366				
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367				
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368				
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369				
 Base support for feet or wheels - 2000mm (700/900) 	PNC 206370				
 Rear paneling - 600mm (700/900XP) 	PNC 206373				
 Rear paneling - 800mm (700/900) 	PNC 206374				
• Rear paneling - 1000mm (700/900)	PNC 206375				
• Rear paneling - 1200mm (700/900)	PNC 206376				
• Kit town gas nozzles (G150) for 700	PNC 206389				
grill	FINC 200309	_			
• Chimney grid net, 400mm (700XP/900)	PNC 206400				
Base support for feet or wheels - 600mm (700/900)	PNC 206431				
 Kit G.25.3 (NI) gas nozzles for 900 fryers 	PNC 206467				
 2 side covering panels for free standing appliances 	PNC 216000				
 Basket for 7lt top and free standing fryers 	PNC 921608				
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693				





Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter




G EQ

20 1/16 ' 510 mm

EQ = Equipotential screw
G = Gas connection

3 9/16 ¹ 90 mm

28 1/8 " 715 mm

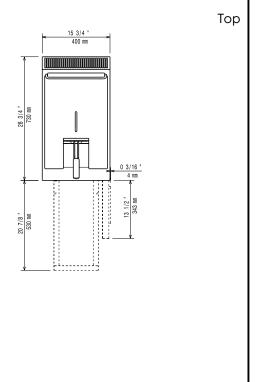

27 9/16 " 700 mm

3 15/16 "

Gas

Gas Power:

371068 (E7FRGD1BF0) 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 1/2"

LPG Gas Pressure: 11" w.c. (27.7 mbar)

Key Information:

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 235 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 5.5 It MIN; 7 It MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight:40 kgShipping weight:48 kgShipping height:1120 mmShipping width:460 mmShipping depth:820 mmShipping volume:0.42 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat

insulation fitted.

Certification group: N7FG

 ϵ

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter