

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



371068 (E7FRGD1BF0)

7-lt gas Fryer free standing
with 1 "V" shape well
(external burners), 1 basket
and lid included

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- High efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of Door for open base PNC 206350 cupboard
- 1 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 120 mm diameter PNC 206126 ☐
- Matching ring for flue condenser, 120 mm diameter PNC 206127 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400mm PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm PNC 206150 ☐

APPROVAL: _____


• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Pair of side kicking strips	PNC 206249	☐
• Pair of side kicking strips for concrete installation	PNC 206265	☐
• Chimney upstand, 400mm	PNC 206303	☐
• Right and left side handrails	PNC 206307	☐
• Back handrail 800 mm	PNC 206308	☐
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	☐
• Door for open base cupboard	PNC 206350	☐
• Base support for feet or wheels - 400mm (700/900)	PNC 206366	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 600mm (700/900XP)	PNC 206373	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Kit town gas nozzles (G150) for 700 grill	PNC 206389	☐
• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• Base support for feet or wheels - 600mm (700/900)	PNC 206431	☐
• Kit G.25.3 (NI) gas nozzles for 900 fryers	PNC 206467	☐
• 2 side covering panels for free standing appliances	PNC 216000	☐
• Basket for 7lt top and free standing fryers	PNC 921608	☐
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	☐
• Pressure regulator for gas units	PNC 927225	☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter

Front

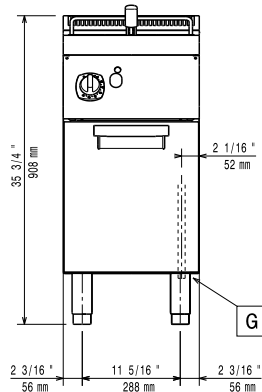


Side

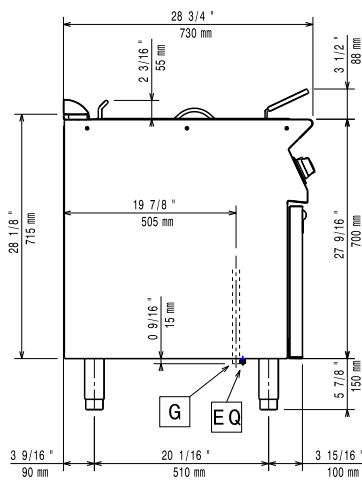

EQ = Equipotential screw
G = Gas connection

Top

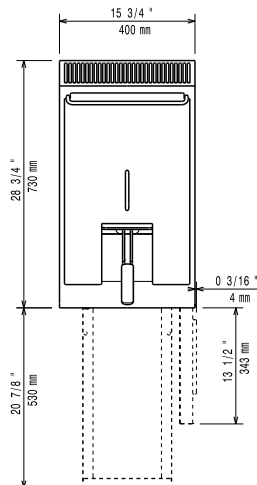

Gas

LPG Gas Pressure:

371068 (E7FRGD1BF0)

11" w.c. (27.7 mbar)

Gas Power:

7 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width):

240 mm

Usable well dimensions

(height):

235 mm

Usable well dimensions

(depth):

380 mm

Well capacity:

5.5 lt MIN; 7 lt MAX

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

40 kg

Shipping weight:

48 kg

Shipping height:

1120 mm

Shipping width:

460 mm

Shipping depth:

820 mm

Shipping volume:

0.42 m³

Certification group:

N7FG



Modular Cooking Range Line
700XP One Well Freestanding Gas Fryer 7 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.27