

Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



371066 (E7FRGD1B00)

7-It gas Fryer Top with 1 "V" shape well (external burners), 1 basket and lid included

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped well.
- High efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL:






Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter

Included Accessories

 1 of Basket for 7lt top and free standing PNC 921608 fryers


Optional Accessories

 Junction sealing kit 	PNC 206086	
 Draught diverter, 120 mm diameter 	PNC 206126	
 Matching ring for flue condenser, 120 mm diameter 	PNC 206127	
 Support for bridge type installation, 800mm 	PNC 206137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
 Support for bridge type installation, 1400mm 	PNC 206140	
 Support for bridge type installation, 1600mm 	PNC 206141	
 Support for bridge type installation, 400mm 	PNC 206154	
Chimney upstand, 400mm	PNC 206303	
Right and left side handrails	PNC 206307	
Back handrail 800 mm	PNC 206308	
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
Kit G.25.3 (NI) gas nozzles for 900 fryers	PNC 206467	
 2 side covering panels for top appliances 	PNC 216277	
Basket for 7lt top and free standing fryers	PNC 921608	
Pressure regulator for gas units	PNC 927225	





Modular Cooking Range Line 700XP One Well Gas Fryer Top 7

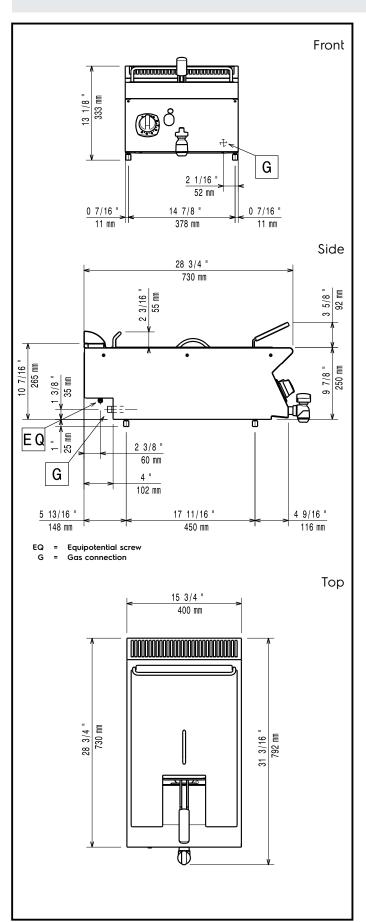

Gas

Gas Power: 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width):

240 mm

Usable well dimensions (height):

235 mm

Usable well dimensions (depth):

380 mm

Well capacity: 5.5 lt MIN; 7 lt MAX Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 30 kg Shipping weight: ISO 9001 kg Shipping height: 520 mm Shipping width: 460 mm Shipping depth: 820 mm Shipping volume: 0.2 m³ Certification group: N7FG

Modular Cooking Range Line 700XP One Well Gas Fryer Top 7 liter