



Modular Cooking Range Line 700XP 11 lt. Gas Multifunctional Cooker with compound bottom

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



371105 (E7MFGDDD00)

11-lt gas Multifunctional
Cooker with compound steel
cooking surface

Short Form Specification

Item No.

Suitable for natural gas or LPG. Burners with double flame line to guarantee heat uniformity. To be installed on 50 mm high feet for cleaning ease. Well to have rounded corners and cooking surface in compound steel (a 3mm layer of 316 AISI stainless steel on top of a 12mm layer of mild steel). Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Multi purpose cooking appliance that can be used to shallow fry, cook liquids or even as a bain marie. Unit can be used for sautéing, poaching, steaming, simmering, stewing, braising, boiling and preparing white sauces.
- Well cooking surface made in compound steel (a 3mm layer of 316 AISI stainless steel on top of a 12mm layer of mild steel) for optimum grilling results.
- The stainless steel well to have rounded corners to facilitate cleaning.
- Bottom temperature control is precisely set by a thermostat on the control panel.
- Temperature can be set from 100 °C to 250 °C.
- Uniform temperature distribution over the whole base.
- Short heat-up time of the empty pan.
- Burners equipped with double flame line for better heat distribution.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Delivered with runners for gastronorm container.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

Included Accessories

- 1 of Scraper for smooth plate fry tops
- 1 of Blades with rounded sides for scraper for multifunctional cookers

PNC 164255

- Base support for feet or wheels - 1600mm (700/900) PNC 206369
- Base support for feet or wheels - 2000mm (700/900) PNC 206370
- Rear paneling - 600mm (700/900XP) PNC 206373
- Rear paneling - 800mm (700/900) PNC 206374
- Rear paneling - 1000mm (700/900) PNC 206375
- Rear paneling - 1200mm (700/900) PNC 206376
- Chimney grid net, 400mm (700XP/900) PNC 206400
- Base support for feet or wheels - 600mm (700/900) PNC 206431
- Kit G.25.3 (NI) gas nozzles for 700 and 900 braising pans PNC 206464
- 2 side covering panels for free standing appliances PNC 216000
- Frontal handrail, 400mm PNC 216046
- Frontal handrail, 800mm PNC 216047
- Frontal handrail, 1200mm PNC 216049
- Frontal handrail, 1600mm PNC 216050
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- Lid for 11lt multifunctional cooker PNC 921689
- Pressure regulator for gas units PNC 927225



Optional Accessories


- Junction sealing kit
- Draught diverter, 120 mm diameter
- Matching ring for flue condenser, 120 mm diameter
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels
- Flanged feet kit
- Frontal kicking strip for concrete installation, 400mm
- Frontal kicking strip for concrete installation, 800mm
- Frontal kicking strip for concrete installation, 1000mm
- Frontal kicking strip for concrete installation, 1200mm
- Frontal kicking strip for concrete installation, 1600mm
- Frontal kicking strip, 400mm (not for refr-freezer base)
- Frontal kicking strip, 800mm (not for refr-freezer base)
- Frontal kicking strip, 1000mm (not for refr-freezer base)
- Frontal kicking strip, 1200mm (not for refr-freezer base)
- Frontal kicking strip, 1600mm (not for refr-freezer base)
- Kit 4 feet for concrete installation (not for 900 line free standing grill)
- 2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)
- Pair of side kicking strips
- Pair of side kicking strips for concrete installation
- Chimney upstand, 400mm
- Right and left side handrails
- Back handrail 800 mm
- Flue condenser for 1/2 module, 120 mm diameter
- Door for open base cupboard
- Base support for feet or wheels - 400mm (700/900)
- Base support for feet or wheels - 800mm (700/900)
- Base support for feet or wheels - 1200mm (700/900)

PNC 206086 PNC 206126 PNC 206127 PNC 206135 PNC 206136 PNC 206147 PNC 206148 PNC 206150 PNC 206151 PNC 206152 PNC 206175 PNC 206176 PNC 206177 PNC 206178 PNC 206179 PNC 206210 PNC 206244 PNC 206249 PNC 206265 PNC 206303 PNC 206307 PNC 206308 PNC 206310 PNC 206350 PNC 206366 PNC 206367 PNC 206368
Recommended Detergents

- C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) PNC 0S2292

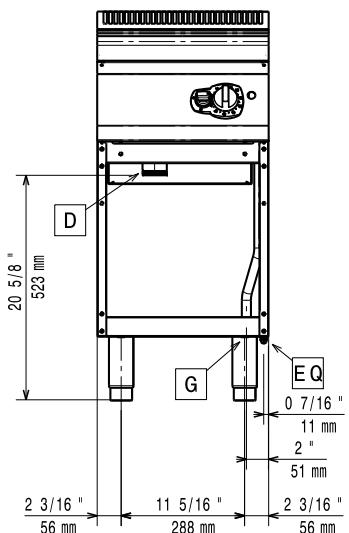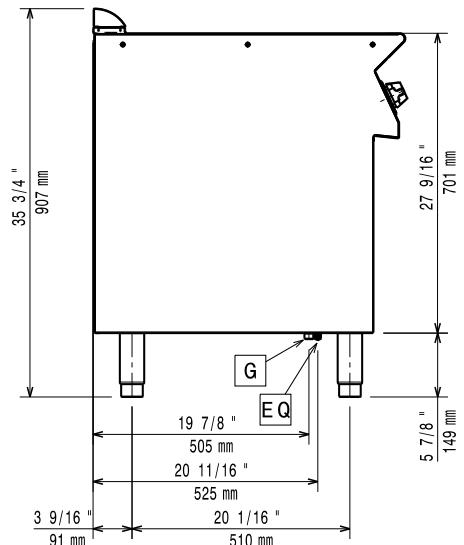

Front

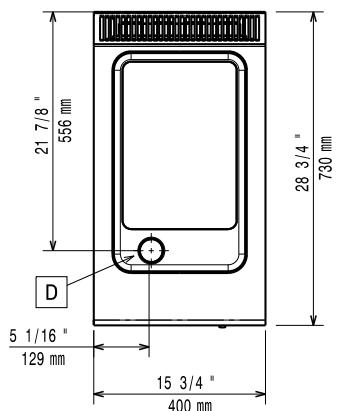Side

EQ = Equipotential screw
G = Gas connection

Top

Gas

Gas Power:	7 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG
Gas Inlet:	1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Cooking Well Height:	70 mm
Working Temperature MIN:	100 °C
Working Temperature MAX:	250 °C
External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	850 mm
Net weight:	45 kg
Shipping weight:	53 kg
Shipping height:	1140 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.43 m³
Certification group:	N7BRG
Cooking surface width:	306 mm
Cooking surface depth:	510 mm

