

ITEM #		
MODEL #		
		_
NAME #		
SIS #		
AIA #		



371237 (E7GRGDGCFU)

Half module gas Grill free standing

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 8 kW stainless steel gas burners with flame failure device, protected by deflection trays. Suitable for natural gas or LPG. Cooking surface grids in enameled cast iron, easily removable for cleaning. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Stainless steel burners with flame failure device.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Stainless steel high splash guard on the rear and sides can be easily removed for cleaning and is dishwasher-safe.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.

APPROVAL:





Included Accessories

• 1 of Scraper for free standing grills PNC 206422

Optional Accessories


Optional Accessories		
 Junction sealing kit 	PNC 206086	
 Draught diverter, 120 mm diameter 	PNC 206126	
 Matching ring for flue condenser, 120 mm diameter 	PNC 206127	
 Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels 	PNC 206135	
 Flanged feet kit 	PNC 206136	
 Frontal kicking strip for concrete installation, 400mm 	PNC 206147	
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148	
 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150	
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151	
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152	
 Frontal kicking strip, 400mm (not for refr-freezer base) 	PNC 206175	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
 Kit 4 feet for concrete installation (not for 900 line free standing grill) 	PNC 206210	
 Pair of side kicking strips 	PNC 206249	
Pair of side kicking strips for concrete installation	PNC 206265	
 Chimney upstand, 400mm 	PNC 206303	
 Right and left side handrails 	PNC 206307	
 Back handrail 800 mm 	PNC 206308	
 Flue condenser for 1/2 module, 120 mm diameter 	PNC 206310	
 Base support for feet or wheels - 400mm (700/900) 	PNC 206366	
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367	
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368	
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369	
 Base support for feet or wheels - 2000mm (700/900) 	PNC 206370	
• Rear paneling - 600mm (700/900XP)	PNC 206373	
 Rear paneling - 800mm (700/900) 	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
 Rear paneling - 1200mm (700/900) 	PNC 206376	
 4 wheels, 2 swivelling with brake (700/900). It is mandatory to install with base supports for feet/wheels 	PNC 206382	
UKKit town gas nozzles (G150) for 700	PNC 206389	
grill	200007	_



PNC 206414	
PNC 206415	
PNC 206421	
PNC 206422	
PNC 206431	
PNC 206462	
PNC 216000	
PNC 216046	
PNC 216047	
PNC 216049	
PNC 216050	
PNC 216185	
PNC 216186	
PNC 927225	
	PNC 206422 PNC 206431 PNC 206462 PNC 216000 PNC 216046 PNC 216047 PNC 216049 PNC 216050 PNC 216185 PNC 216186





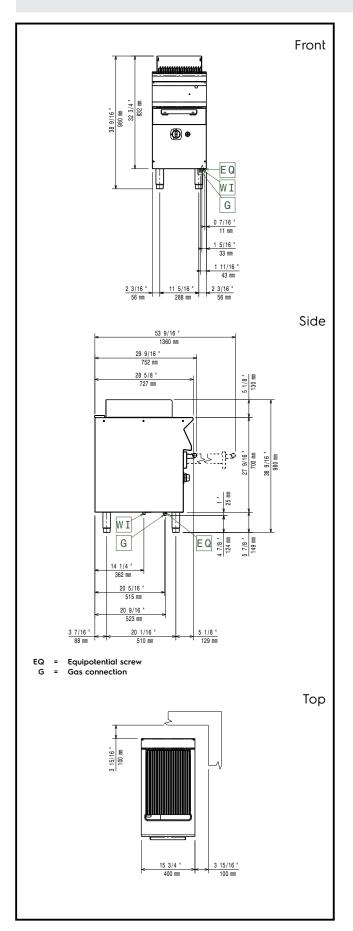

Modular Cooking Range Line 700XP Half Module Freestanding Gas Char-Grill



Gas

Gas Power: 8 kW

Natural Gas G20 (20mbar)

Standard gas delivery: (20mbar)
Gas Type Option: LPG;Town
Gas Inlet: 3/4"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight: 40 kg Shipping weight: 57 kg Shipping height: 1180 mm Shipping width: 460 mm Shipping depth: 810 mm Shipping volume: 0.44 m³ Certification group: N7GG Cooking surface width: 316 mm Cooking surface depth: 478 mm

