



## Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



371071 (E7FRGH2GF0)

15+15-lt gas Fryer free standing with 2 "V" shape wells (external burners), 2 baskets and lids included

### Short Form Specification

#### Item No.

To be installed on height adjustable feet in stainless steel. Four high efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped wells.
- Four high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

### Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 2 of Door for open base cupboard PNC 206350
- 2 of 1 full size basket for 10lt OptiOil and 14/15lt fryers PNC 921691

### Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm PNC 206152 ☐

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

|                                                                                  |            |                          |
|----------------------------------------------------------------------------------|------------|--------------------------|
| • Frontal kicking strip, 800mm (not for refr-freezer base)                       | PNC 206176 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                      | PNC 206177 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                      | PNC 206178 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                      | PNC 206179 | <input type="checkbox"/> |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill)    | PNC 206210 | <input type="checkbox"/> |
| • Sediment tray for 15lt fryers                                                  | PNC 206235 | <input type="checkbox"/> |
| • Flue condenser for 1 module, 150 mm diameter                                   | PNC 206246 | <input type="checkbox"/> |
| • Pair of side kicking strips                                                    | PNC 206249 | <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                          | PNC 206265 | <input type="checkbox"/> |
| • Oil drain pipe for 15lt free standing fryer                                    | PNC 206301 | <input type="checkbox"/> |
| • Chimney upstand, 800mm                                                         | PNC 206304 | <input type="checkbox"/> |
| • Right and left side handrails                                                  | PNC 206307 | <input type="checkbox"/> |
| • Back handrail 800 mm                                                           | PNC 206308 | <input type="checkbox"/> |
| • Door for open base cupboard                                                    | PNC 206350 | <input type="checkbox"/> |
| • Base support for feet or wheels - 800mm (700/900)                              | PNC 206367 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1200mm (700/900)                             | PNC 206368 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1600mm (700/900)                             | PNC 206369 | <input type="checkbox"/> |
| • Base support for feet or wheels - 2000mm (700/900)                             | PNC 206370 | <input type="checkbox"/> |
| • Rear paneling - 800mm (700/900)                                                | PNC 206374 | <input type="checkbox"/> |
| • Rear paneling - 1000mm (700/900)                                               | PNC 206375 | <input type="checkbox"/> |
| • Rear paneling - 1200mm (700/900)                                               | PNC 206376 | <input type="checkbox"/> |
| • Chimney grid net, 400mm (700XP/900)                                            | PNC 206400 | <input type="checkbox"/> |
| • Kit G.25.3 (NI) gas nozzles for 900 fryers                                     | PNC 206467 | <input type="checkbox"/> |
| • 2 side covering panels for free standing appliances                            | PNC 216000 | <input type="checkbox"/> |
| • 1 full size basket for 10lt OptiOil and 14/15lt fryers                         | PNC 921691 | <input type="checkbox"/> |
| • 2 half size baskets for 10lt OptiOil and 14/15lt fryers                        | PNC 921692 | <input type="checkbox"/> |
| • Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers | PNC 921693 | <input type="checkbox"/> |
| • Blades with rounded sides for scraper for multifunctional cookers              | PNC 921694 | <input type="checkbox"/> |
| • Unclogging rod for 15lt fryers drainage pipe                                   | PNC 921695 | <input type="checkbox"/> |
| • Deflector for floured products for 15lt fryers                                 | PNC 921696 | <input type="checkbox"/> |
| • Pressure regulator for gas units                                               | PNC 927225 | <input type="checkbox"/> |



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter

Front




Side



EQ = Equipotential screw  
G = Gas connection

Top

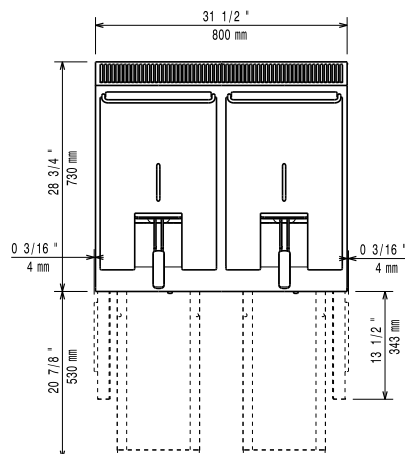

### Gas

|                                   |                          |
|-----------------------------------|--------------------------|
| Gas Power:                        | 28 kW                    |
| Standard gas delivery:            | Natural Gas G20 (20mbar) |
| Gas Type Option:                  | LPG; Natural Gas         |
| Working pressure, mBar (min/Max): | 0 / 0                    |
| Gas Inlet:                        | 1/2"                     |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

|                                  |                        |
|----------------------------------|------------------------|
| Usable well dimensions (width):  | 240 mm                 |
| Usable well dimensions (height): | 505 mm                 |
| Usable well dimensions (depth):  | 380 mm                 |
| Well capacity:                   | 13 lt MIN; 15 lt MAX   |
| Thermostat Range:                | 105 °C MIN; 185 °C MAX |
| Net weight:                      | 85 kg                  |
| Shipping weight:                 | 98 kg                  |
| Shipping height:                 | 1130 mm                |
| Shipping width:                  | 820 mm                 |
| Shipping depth:                  | 860 mm                 |
| Shipping volume:                 | 0.8 m <sup>3</sup>     |
| Certification group:             | N7FG                   |



Modular Cooking Range Line  
700XP Two Wells Freestanding Gas Fryer 15 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.24