

## Modular Cooking Range Line 700XP Two Wells Gas Fryer Top 7 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**371067 (E7FRGH2B00)**

7+7-lt gas Fryer Top with 2  
"V" shape wells (external  
burners), 2 baskets and lids  
included

### Short Form Specification

#### Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Two high efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped wells.
- Interior of wells with rounded corners for ease of cleaning.
- Two high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the wells.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the wells.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 2 of Basket for 7lt top and free standing fryers PNC 921608

### Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Support for bridge type installation, 800mm PNC 206137 ☐
- Support for bridge type installation, 1000mm PNC 206138 ☐
- Support for bridge type installation, 1200mm PNC 206139 ☐
- Support for bridge type installation, 1400mm PNC 206140 ☐
- Support for bridge type installation, 1600mm PNC 206141 ☐
- Flue condenser for 1 module, 150 mm diameter PNC 206246 ☐
- Chimney upstand, 800mm PNC 206304 ☐

APPROVAL: \_\_\_\_\_



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP Two Wells Gas Fryer Top 7 liter

- |                                               |            |                          |
|-----------------------------------------------|------------|--------------------------|
| • Right and left side handrails               | PNC 206307 | <input type="checkbox"/> |
| • Back handrail 800 mm                        | PNC 206308 | <input type="checkbox"/> |
| • Chimney grid net, 400mm (700XP/900)         | PNC 206400 | <input type="checkbox"/> |
| • Kit G.25.3 (NI) gas nozzles for 900 fryers  | PNC 206467 | <input type="checkbox"/> |
| • 2 side covering panels for top appliances   | PNC 216277 | <input type="checkbox"/> |
| • Basket for 7lt top and free standing fryers | PNC 921608 | <input type="checkbox"/> |
| • Pressure regulator for gas units            | PNC 927225 | <input type="checkbox"/> |



Modular Cooking Range Line  
700XP Two Wells Gas Fryer Top 7 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2025.09.17




**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP Two Wells Gas Fryer Top 7 liter

Front

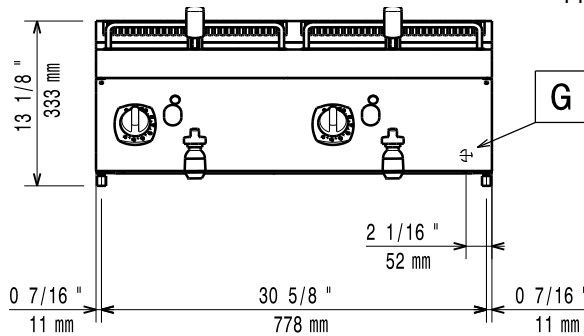


Side

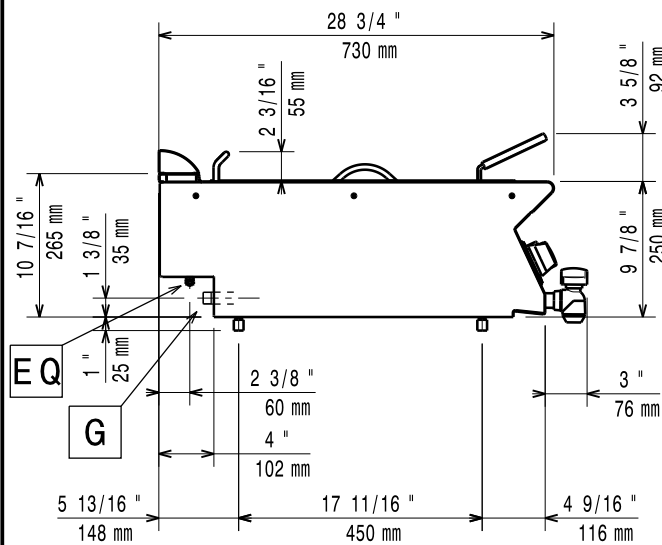

EQ = Equipotential screw  
G = Gas connection

Top

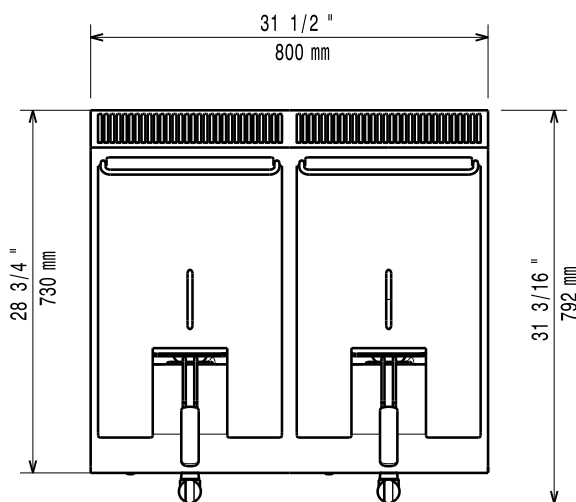

### Gas

|                                   |                          |
|-----------------------------------|--------------------------|
| Gas Power:                        | 14 kW                    |
| Standard gas delivery:            | Natural Gas G20 (20mbar) |
| Gas Type Option:                  | LPG; Natural Gas         |
| Working pressure, mBar (min/Max): | 0 / 0                    |
| Gas Inlet:                        | $1/2''$                  |

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

|                                  |                        |
|----------------------------------|------------------------|
| Usable well dimensions (width):  | 240 mm                 |
| Usable well dimensions (height): | 235 mm                 |
| Usable well dimensions (depth):  | 380 mm                 |
| Well capacity:                   | 5.5 lt MIN; 7 lt MAX   |
| Thermostat Range:                | 105 °C MIN; 185 °C MAX |
| Net weight:                      | 47 kg                  |
| Shipping weight:                 | 54 kg                  |
| Shipping height:                 | 540 mm                 |
| Shipping width:                  | 820 mm                 |
| Shipping depth:                  | 860 mm                 |
| Shipping volume:                 | 0.38 m <sup>3</sup>    |
| Certification group:             | N7FG                   |



Modular Cooking Range Line  
700XP Two Wells Gas Fryer Top 7 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.17