

Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA "	



371178 (E7GCGH4CO0)

4-Burner (5,5 kW each) gas Range on Open Base

Short Form Specification

Item No.

High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Open base to store pots, pans, sheet pans etc. Constructed in stainless steel with Scotch Brite finish. Delivered with 50 mm height adjustable feet.

Main Features

- Unit can be easily installed below other 700 line top models.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Open base compartment for storage of pots, pans, sheet pans, etc.
- Doors with handles, drawers, heating kits and runners for GN containers can be ordered separately.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- IPx4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.

Optional Accessories

•	GN2/1 chrome grid for static oven	PNC	164250	
•	Junction sealing kit	PNC	206086	
•	Draught diverter, 150 mm diameter	PNC	206132	
•	Matching ring for flue condenser, 150 mm diameter	PNC	206133	
•	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC	206135	
•	Flanged feet kit	PNC	206136	
•	Frontal kicking strip for concrete installation, 800mm	PNC	206148	
•	Frontal kicking strip for concrete installation, 1000mm	PNC	206150	
•	Frontal kicking strip for concrete installation, 1200mm	PNC	206151	

APPROVAL:






Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

•	Frontal kicking strip for concrete installation, 1600mm	PNC	206152	
	Frontal handrail 800 mm	PNC	206167	
	Frontal kicking strip, 800mm (not for refr-freezer base)		206176	_
•	Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC	206177	
•	Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC	206178	
•	Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC	206179	
•	LARGE HANDRAIL(PORTIONING SHELF)800 MM	PNC	206186	
•	FRONTAL HANDRAIL 1200 MM	PNC	206191	
•	FRONTAL HANDRAIL 1600 MM	PNC	206192	
	Kit 4 feet for concrete installation (not for 900 line free standing grill)		206210	
•	Right and left side handrails		206240	
•	2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)	PNC	206244	
•	Central support for installation of drawers and grid (on 800/1200mm bases) and of doors (on 1200mm bases)	PNC	206245	
•	Flue condenser for 1 module, 150 mm diameter	PNC	206246	
•	Pair of side kicking strips	PNC	206249	
	Electric heating kit for cupboards	PNC	206259	
•	Single burner smooth plate for direct cooking - fits frontal burners only	PNC	206260	
•	Single burner ribbed plate for direct cooking- fits frontal burners only	PNC	206261	
•	Single burner radiant plate for pan support	PNC	206264	
•	Pair of side kicking strips for concrete installation	PNC	206265	
•	Water column with swivel arm (water column extension not included)		206289	
	Water column extension for 700 line		206291	
	Stainless steel double grid for 2 burners		206297	
	Chimney upstand, 800mm		206304	
•	Back handrail 800 mm		206308	
•	Wok pan support for open burners (700/900)		206363	
	Base support for feet or wheels - 800mm (700/900)		206367	
	Base support for feet or wheels - 1200mm (700/900)		206368	
	Base support for feet or wheels - 1600mm (700/900)		206369	
•	Rear paneling - 800mm (700/900)		206374	
•	Rear paneling - 1000mm (700/900)		206375	
•	Rear paneling - 1200mm (700/900)		206376	
•	Pressure regulator for gas units	PNC	927225	





Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

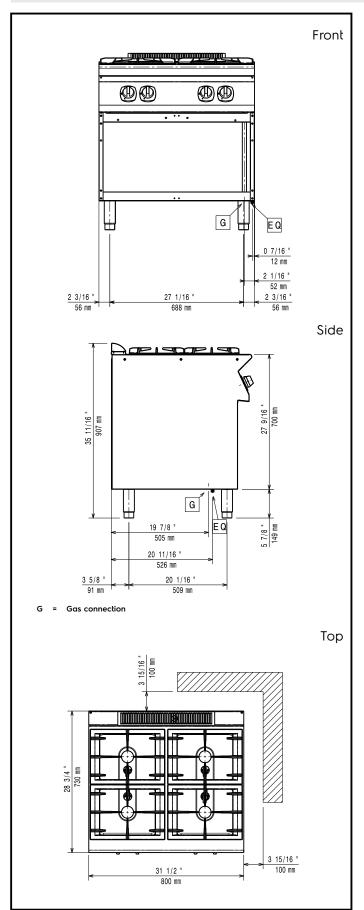

Gas

Gas Power: 22 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG;Town
Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

External dimensions, Width: 800 mm External dimensions, Depth: 730 mm External dimensions, Height: 850 mm Net weight: 50 kg Shipping weight: 67 kg Shipping height: 1080 mm Shipping width: 820 mm Shipping depth: 860 mm Shipping volume: 0.76 m³ Front Burners Power: 5.5 - 5.5 kW **Back Burners Power:** 5.5 - 5.5 kW Certification group: N7CG

Back Burners Dimension -

mm Ø 60 Ø 60

Front Burners Dimension -

mm Ø 60 Ø 60

Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

