

Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA "	



371178 (E7GCGH4CO0)

4-Burner (5,5 kW each) gas Range on Open Base

Short Form Specification

Item No.

High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Open base to store pots, pans, sheet pans etc. Constructed in stainless steel with Scotch Brite finish. Delivered with 50 mm height adjustable feet.

Main Features

- Unit can be easily installed below other 700 line top models.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Open base compartment for storage of pots, pans, sheet pans, etc.
- Doors with handles, drawers, heating kits and runners for GN containers can be ordered separately.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- IPx4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.

Optional Accessories

•	GN2/1 chrome grid for static oven	PNC	164250	
•	Junction sealing kit	PNC	206086	
•	Draught diverter, 150 mm diameter	PNC	206132	
•	Matching ring for flue condenser, 150 mm diameter	PNC	206133	
•	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC	206135	
•	Flanged feet kit	PNC	206136	
•	Frontal kicking strip for concrete installation, 800mm	PNC	206148	
•	Frontal kicking strip for concrete installation, 1000mm	PNC	206150	
•	Frontal kicking strip for concrete installation, 1200mm	PNC	206151	

APPROVAL:






Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

Frontal kicking strip for concrete installation, 1600mm	PNC 206152	
Frontal handrail 800 mm	PNC 206167	
	PNC 206176	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 2001/0	ч
Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
LARGE HANDRAIL(PORTIONING SHELF)800 MM	PNC 206186	
FRONTAL HANDRAIL 1200 MM	PNC 206191	
FRONTAL HANDRAIL 1600 MM	PNC 206192	
		_
Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
 Right and left side handrails 	PNC 206240	
 2 supports with side runners for 4 GN 	PNC 206244	
1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)		
 Central support for installation of drawers and grid (on 800/1200mm bases) and of doors (on 1200mm bases) 	PNC 206245	
Flue condenser for 1 module, 150 mm diameter	PNC 206246	
Pair of side kicking strips	PNC 206249	
Electric heating kit for cupboards	PNC 206259	$\overline{\Box}$
	PNC 206260	
Single burner smooth plate for direct cooking - fits frontal burners only		_
Single burner ribbed plate for direct cooking- fits frontal burners only	PNC 206261	
Single burner radiant plate for pan support	PNC 206264	_
 Pair of side kicking strips for concrete installation 	PNC 206265	
 Water column with swivel arm (water column extension not included) 	PNC 206289	
 Water column extension for 700 line 	PNC 206291	
• Stainless steel double grid for 2 burners	PNC 206297	
Chimney upstand, 800mm	PNC 206304	
Back handrail 800 mm	PNC 206308	
	PNC 206363	
Wok pan support for open burners (700/900) Page support for feet or wheels	PNC 206367	_
Base support for feet or wheels - 800mm (700/900)		
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369	
 Rear paneling - 800mm (700/900) 	PNC 206374	
 Rear paneling - 1000mm (700/900) 	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Chimney grid net, 500mm (700XP/900)	PNC 206402	
• Kit G.25.3 (NI) gas nozzles for 700 top	PNC 206460	
and - freestanding on oven - gas cookers	1110 200400	_
Pressure regulator for gas units	PNC 927225	





Modular Cooking Range Line 700XP 4-Burner Gas Boiling Top on Open Base 800mm

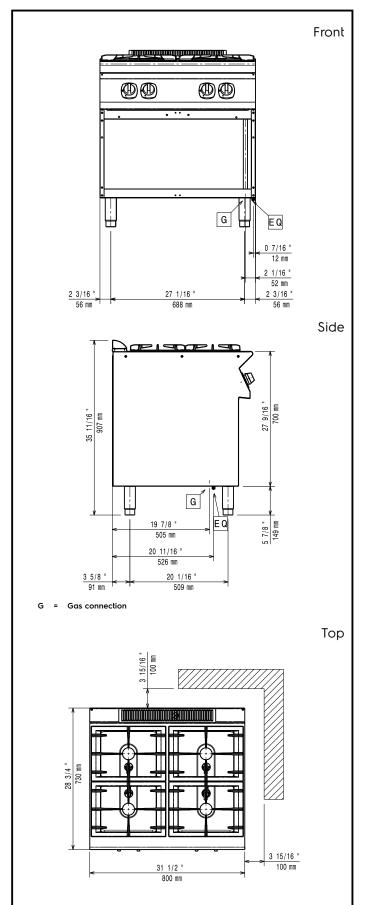

Gas

Gas Power: 22 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG;Town Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat

insulation fitted.

External dimensions, Width: 800 mm External dimensions, Depth: 730 mm External dimensions, Height: 850 mm Net weight: 50 kg Shipping weight: 67 kg Shipping height: 1080 mm Shipping width: 820 mm Shipping depth: 860 mm Shipping volume: 0.76 m³ Front Burners Power: 5.5 - 5.5 kW **Back Burners Power:** 5.5 - 5.5 kW Certification group: N7CG

Back Burners Dimension -

Ø60 Ø60

Front Burners Dimension -

Ø 60 Ø 60 mm

