



## Modular Cooking Range Line 700XP 6 Drawer Refrigerated Base



371296 (E7TTBECOMKN)

Refrigerated base with 6 drawers, -2/+10° C, automatic evaporation of defrost condense - R290

### Short Form Specification

#### Item No.

Refrigerated base with 6 drawers. Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10° C. To be installed below 700XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- Unit can be easily installed below other 700 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

### Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

### Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).



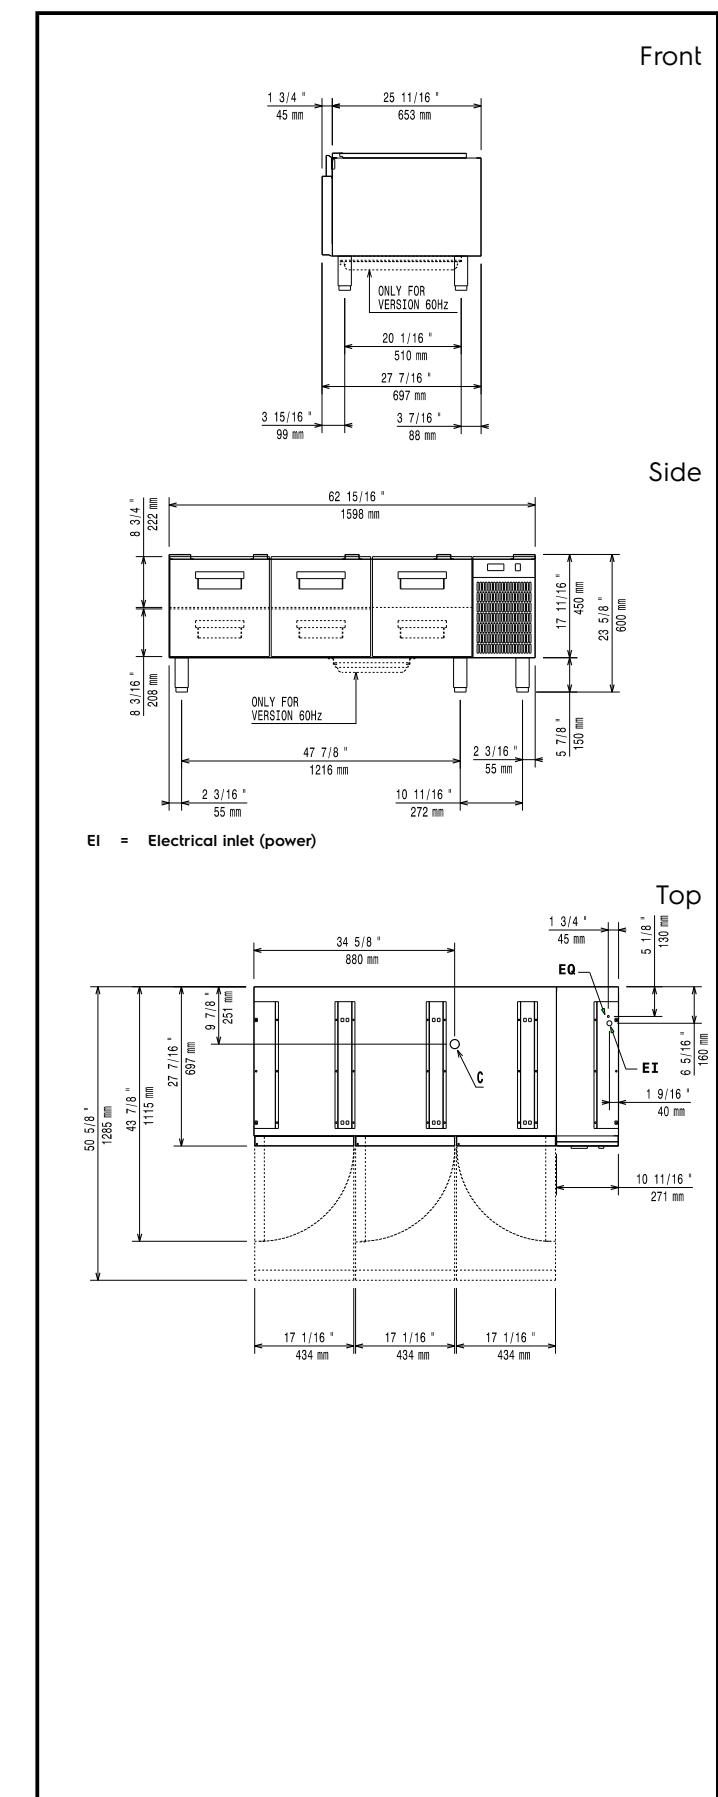
### Optional Accessories

• Flanged feet kit	PNC 206136 <input type="checkbox"/>
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152 <input type="checkbox"/>
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179 <input type="checkbox"/>
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210 <input type="checkbox"/>
• 2 panels for service duct for single "top on base" installation	PNC 206248 <input type="checkbox"/>
• Pair of side kicking strips	PNC 206249 <input type="checkbox"/>
• Pair of side kicking strips for concrete installation	PNC 206265 <input type="checkbox"/>
• 2 drawers for refrigerated base	PNC 206351 <input type="checkbox"/>
• Kit 6 wheels - 3 swivelling with brake	PNC 206432 <input type="checkbox"/>
• Kit to install refrigerated base on wheels (wheels to be ordered separately)	PNC 206444 <input type="checkbox"/>
• 2 side covering panels for free standing appliances	PNC 216000 <input type="checkbox"/>

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


**Electric**

<b>Supply voltage:</b>	220-230 V/1N ph/50 Hz
<b>Electrical power, max:</b>	0.4 kW
<b>Total Watts:</b>	0.4 kW
<b>Plug type:</b>	CE-SCHUKO

**Key Information:**

<b>External dimensions, Width:</b>	1600 mm
<b>External dimensions, Depth:</b>	700 mm
<b>External dimensions, Height:</b>	600 mm
<b>Net weight:</b>	110 kg
<b>Shipping weight:</b>	149 kg
<b>Shipping height:</b>	780 mm
<b>Shipping width:</b>	860 mm
<b>Shipping depth:</b>	1700 mm
<b>Shipping volume:</b>	1.14 m <sup>3</sup>
<b>Gross capacity:</b>	180 lt

**Sustainability**

<b>Refrigerant type:</b>	R290
<b>Refrigerant weight (unit 1):</b>	85 g