Electrolux

Modular Cooking Range Line 700XP 6-Burner Gas Boiling Top on Open Base 1200mm



duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Open base to store pots, pans, sheet pans etc. Constructed in stainless steel with Scotch Brite finish. Delivered with 50 mm height adjustable feet.

Main Features

ITEM #

SIS #

AIA #

MODEL # NAME #

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- IPx4 water protection.
- Unit can be easily installed below other 700 line top models.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Open base compartment for storage of pots, pans, sheet pans, etc.
- Doors with handles, drawers, heating kits and runners for GN containers can be ordered separately.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.

Optional Accessories

- Junction sealing kit
 - PNC 206086 🛛 Draught diverter, 150 mm PNC 206132
- diameter Matching ring for flue condenser, PNC 206133 150 mm diameter
- Kit 4 wheels 2 swivelling with PNC 206135 brake - it is mandatory to install Base support and wheels
- Flanged feet kit PNC 206136
- Frontal kicking strip for concrete PNC 206151 installation, 1200mm
- Frontal kicking strip for concrete PNC 206152 🛛 installation, 1600mm
- Frontal kicking strip, 1200mm (not PNC 206178 🗅 for refr-freezer base)
- Frontal kicking strip, 1600mm (not PNC 206179 for refr-freezer base)

APPROVAL:







•	FRONTAL HANDRAIL 1200 MM	PNC	206191	
•	FRONTAL HANDRAIL 1600 MM	PNC	206192	
•	Kit 4 feet for concrete installation (not	PNC	206210	
	for 900 line free standing grill)			
	Right and left side handrails		206240	
•	2 supports with side runners for 4 GN 1/1 containers for open base cupboards	PNC	206244	
	(multifunctional cookers, solid top and			
	gas ranges with cupboard)			
٠	Central support for installation of	PNC	206245	
	drawers and grid (on 800/1200mm bases) and of doors (on 1200mm			
	bases)			
٠	Flue condenser for 1 module, 150 mm	PNC	206246	
	diameter	DNIC	00/0/0	
	Pair of side kicking strips		206249	
	Electric heating kit for cupboards		206259	
•	Single burner smooth plate for direct cooking - fits frontal burners only	PINC	206260	
•	Single burner ribbed plate for direct	PNC	206261	
	cooking- fits frontal burners only			
٠	Single burner radiant plate for pan support	PNC	206264	
•	Pair of side kicking strips for concrete	PNC	206265	
	installation		200200	-
٠	Water column with swivel arm (water	PNC	206289	
	column extension not included)	DNIC	20/201	
	Water column extension for 700 line		206291 206297	
	Stainless steel double grid for 2 burners		206297	
	Chimney upstand, 1200mm Wok pan support for open burners		206363	
•	(700/900)	FINC	200303	
•	Base support for feet or wheels -	PNC	206367	
	800mm (700/900)			_
•	Base support for feet or wheels - 1200mm (700/900)	PNC	206368	
•	Base support for feet or wheels -	PNC	206369	
	1600mm (700/900)			-
	Rear paneling - 1200mm (700/900)		206376	
٠	Kit town gas nozzles (G150) for 700	PNC	206388	
•	solid top and burner Chimpov grid pat 500mm (700XP/800)		206402	
	Chimney grid net, 500mm (700XP/900) Kit G.25.3 (NI) gas nozzles for 700 top		206402	
•	and - freestanding on oven - gas	INC	200400	9
	cookers			
٠	Pressure regulator for gas units	PNC	927225	

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP 6-Burner Gas Boiling Top on Open Base 1200mm

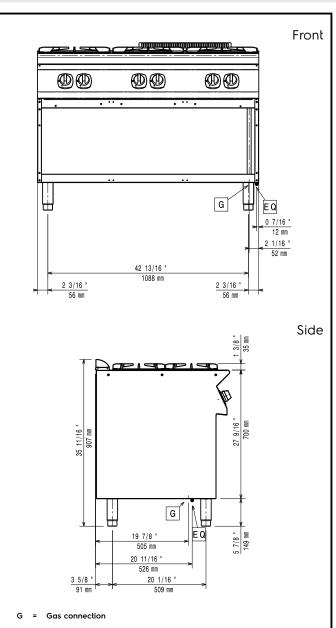



Gas

Gas Power: 371179 (E7GCGL6COO) Standard gas delivery: Gas Type Option: Gas Inlet:	33 kW Natural Gas G20 (20mbar) LPG;Town 1/2"		
Key Information:			
Front Burners Power: Back Burners Power: Middle Burners Power: Back Burners Dimension -	5.5 - 5.5 kW 5.5 - 5.5 kW 5.5 - 0/5.5 - 0 kW		
mm	Ø60 Ø60		
Front Burners Dimension - mm	Ø60 Ø60		
Middle Burners Dimension - mm	Ø60 Ø60		
External dimensions, Width:	1200 mm		
External dimensions, Depth:	700 mm		
External dimensions, Height:	850 mm		
Net weight:	75 kg		
Shipping weight: Shipping height: Shipping width:	ISO 9001; ISO 14001; ISO 45001; ISO 50001 kg 1090 mm 820 mm		
Shipping depth: Shipping volume:	1300 mm 1.16 m³		
Shipping volume.	1.10 111		

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:

N7CG

Modular Cooking Range Line 700XP 6-Burner Gas Boiling Top on Open Base 1200mm

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.