FROFESSIONAL

Modular Cooking Range Line 700XP 800mm Electric Fry Top, Smooth Brushed Chrome Plate



371322 (E7IIKIAOMEA)	Full module electric Fry Top with smooth brushed chrome cooking Plate, sloped, thermostatic control, scraper included,230V
371340 (E7IIKDAOMEA)	Full module electric Fry Top with smooth brushed chrome cooking Plate, sloped, thermostatic control, scraper included

Short Form Specification

Item No.

To be installed on open base installations or bridging supports. Smooth cooking surface in brushed chrome. Temperature range from 120°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM #		
MODEL #		
NAME #		
<u>SIS #</u>		
AIA #		

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1,5 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- IPx4 water protection.
- Infrared heating elements mounted below the cooking surface.
- Frontal simmering zone.
- Temperature range from 120° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Suitable for countertop installation.

Construction

- Cooking surface completely smooth.
- Exterior panel in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.

APPROVAL:






Included Accessories

1 of Scraper for smooth plate fry tops	PNC 164255	
Optional Accessories		
Scraper for smooth plate fry tops	PNC 164255	
Junction sealing kitSupport for bridge type installation,	PNC 206086 PNC 206137	
800mm	FINC 200137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
 Support for bridge type installation, 1400mm 	PNC 206140	
 Support for bridge type installation, 1600mm 	PNC 206141	
 Frontal kicking strip, 400mm (not for refr-freezer base) (only for 371322) 	PNC 206175	
 Frontal kicking strip, 1000mm (not for refr-freezer base) (only for 371340) 	PNC 206177	
Chimney upstand, 800mm	PNC 206304	
 Right and left side handrails 	PNC 206307	
 Back handrail 800 mm 	PNC 206308	
 Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module) 	PNC 206346	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
Cloche for fry tops	PNC 206455	
• Frontal handrail, 800mm	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 2 side covering panels for top appliances 	PNC 216277	
Recommended Detergents		
		_

•	C41 HI-TEMP RAPID DEGREASER, 1	PNC 0S2292	
	pack of six 1 lt. bottles (trigger incl.)		

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

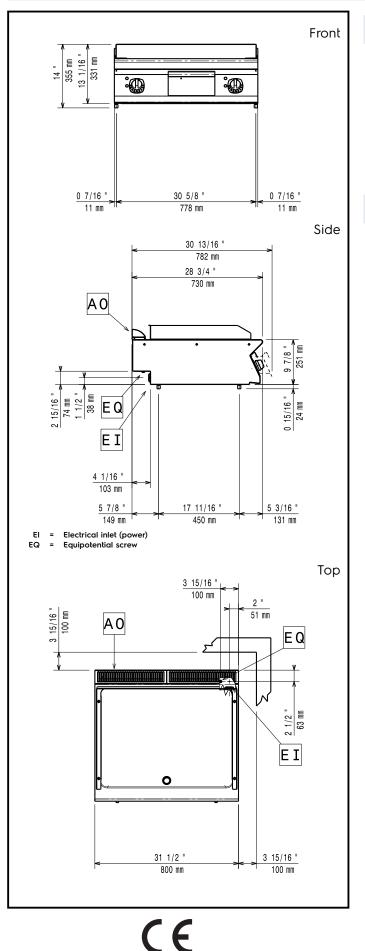

Modular Cooking Range Line 700XP 800mm Electric Fry Top, Smooth Brushed Chrome Plate

Electric

Supply voltage	
Supply voltage:	
371322 (E7IIKIAOMEA)	230 V/3 ph/50/60 Hz
371340 (E7IIKDAOMEA)	400 V/3 ph/50-60 Hz
Predisposed for:	
Electrical power, max:	
371322 (E7IIKIAOMEA)	7.8 kW
371340 (E7IIKDAOMEA)	8.4 kW
Total Watts:	
371322 (E7IIKIAOMEA)	7.8 kW
371340 (E7IIKDAOMEA)	8.4 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

mooration nated.	
Working Temperature MIN:	120 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	800 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	70 kg
Shipping weight:	
371322 (E7IIKIAOMEA)	75 kg
371340 (E7IIKDAOMEA)	73 kg
Shipping height:	
371322 (E7IIKIAOMEA)	540 mm
371340 (E7IIKDAOMEA)	520 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	
371322 (E7IIKIAOMEA)	0.38 m³
371340 (E7IIKDAOMEA)	0.37 m³
Cooking surface width:	730 mm
Cooking surface depth:	540 mm

Modular Cooking Range Line 700XP 800mm Electric Fry Top, Smooth Brushed Chrome Plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.