Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP 800mm Gas Fry Top, Smooth Brushed Chrome Plate



371330 (E7IIKAAOMEA)

Full module gas Fry Top with smooth brushed chrome cooking Plate, sloped, thermostatic control, scraper included

Short Form Specification

Item No.

To be installed on open base installations or bridging supports. Smooth cooking surface in brushed chrome. Suitable to be used with Natural or LPG gas. Temperature range from 100°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
<u>AIA #</u>	

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1,5 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Frontal simmering zone.
- Temperature range from 100° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.
- Cooking surface completely smooth.

APPROVAL:



Included Accessories1 of Scraper for smooth plate fry tops	PNC 164255	
Optional Accessories		
 Scraper for smooth plate fry tops Junction sealing kit Draught diverter, 150 mm diameter Matching ring for flue condenser, 150 mm diameter 	PNC 164255 PNC 206086 PNC 206132 PNC 206133	
 Support for bridge type installation, 800mm 	PNC 206137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
 Support for bridge type installation, 1400mm 	PNC 206140	
 Support for bridge type installation, 1600mm 	PNC 206141	
 Flue condenser for 1 module, 150 mm diameter 	PNC 206246	
 Chimney upstand, 800mm Right and left side handrails Back handrail 800 mm Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module) 	PNC 206304 PNC 206307 PNC 206308 PNC 206346	
 Chimney grid net, 400mm (700XP/900) Cloche for fry tops Kit G.25.3 (NI) gas nozzles for 700 fry tops 	PNC 206400 PNC 206455 PNC 206466	
 Frontal handrail, 800mm Frontal handrail, 1200mm Frontal handrail, 1600mm Large handrail - portioning shelf, 800mm 	PNC 216047 PNC 216049 PNC 216050 PNC 216186	
 2 side covering panels for top appliances 	PNC 216277	
Pressure regulator for gas units	PNC 927225	
 C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) 	PNC 0S2292	



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

(D) 0

14 " 355 mm 13 " 330 mm





Front


0

Gas Power:	14 kW
Gas Type Option:	LPG
Gas Inlet:	1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Working Temperature MIN:	100 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	800 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	70 kg
Shipping weight:	79 kg
Shipping height:	540 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.38 m³
Cooking surface width:	730 mm
Cooking surface depth:	540 mm

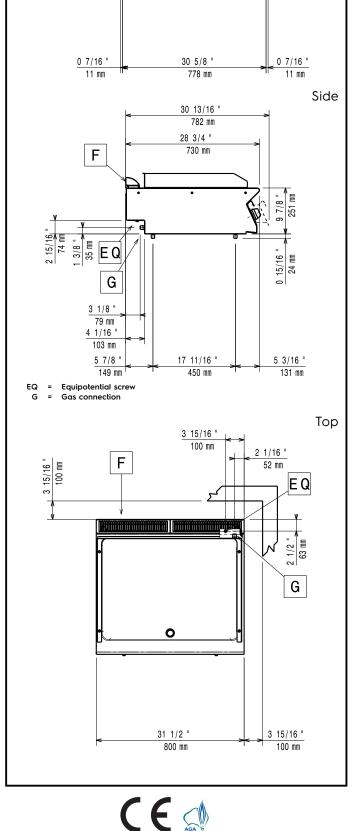

Modular Cooking Range Line 700XP 800mm Gas Fry Top, Smooth Brushed Chrome Plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.