



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Electric Induction Wok HP

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371282 (E7INEDW00P)

Electric single Induction Wok
(5 kW)

Short Form Specification

Item No. _____

6 mm thick glass ceramic Wok bowl with 5 kW surface power. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- 6mm glass-ceramic cooking surface with a total power of 5 kW.
- Indicating lamp for operating zone located on control console.
- Induction plate endowed with overheating safety device.
- Power to the zone can be set with progressive output i.e. fine regulation at the lower levels and larger progress at the upper levels.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- Automatic pan detection to transfer power only when pan is present.
- IPx4 water protection.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Support for bridge type installation, 800mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600mm | PNC 206141 | ☐ |
| • Support for bridge type installation, 400mm | PNC 206154 | ☐ |
| • Water column extension for 700 line | PNC 206291 | ☐ |
| • Chimney upstand, 400mm | PNC 206303 | ☐ |
| • Scraper for free standing grills | PNC 206422 | ☐ |
| • 2 side covering panels for top appliances | PNC 216277 | ☐ |
| • Induction Wok pan with wooden handle (diam. 360mm) | PNC 910613 | ☐ |

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Electric Induction Wok HP

- Stainless steel wok pan, design in line with wok cuvette PNC 911000 ☐
- Non-stick wok pan, design in line with wok cuvette PNC 911003 ☐
- Inducton Wok pan with stainless steel handle (diam. 360mm) PNC 911587 ☐
- Stainless steel lid for Wok pan diam. 360mm PNC 911588 ☐




Modular Cooking Range Line
700XP Electric Induction Wok HP


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.07

Front

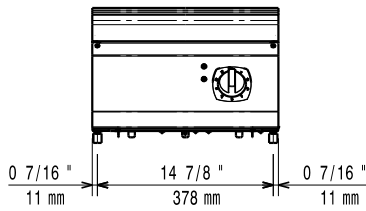


Side

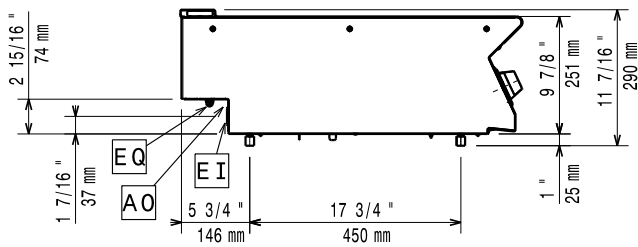

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

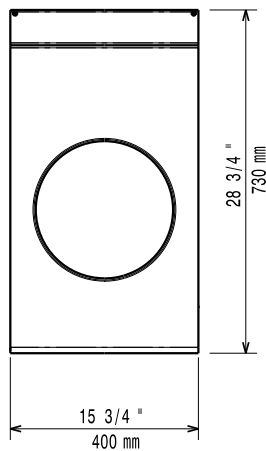

Electric

Supply voltage:	380-400 V/3 ph/50/60 Hz
Predisposed for:	380-400V 3~ 50/60Hz
Total Watts:	4.5-5kW
	5 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.

External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	20 kg
Shipping weight:	28 kg
Shipping height:	540 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.2 m ³
Certification group:	N7CIN
Back Plates Power:	5 - kW
Back Plates dimensions:	Ø 300