

## Modular Cooking Range Line 700XP Electric Grill Top HP 400mm

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



### 371302 (E7JJCIAOMCG)

Half module electric Grill Top HP (high performance). Heating via incoloy armoured heating elements positioned under removable cooking grid, integrated water tap, fixed well with drain, heat boost deflectros, WRAS

### **Short Form Specification**

### Item No.

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids are easily removable for cleaning. Heating elements can be tilted. Integrated water tap. Fixed well with drain. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. WRAS compliant. 230 V version.

### **Main Features**

- Heating elements tilt 90° for easy cleaning.
- Removable 2mm thick steel U-shaped grids for fast heating of cooking surface.
- Top configuration allows installation on ambient base.
- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has an independent power regulation through a control knob.
- Power indicator light.
- Fixed well with drain to collect residual cooking juices and grease.
- Large drain protected by overflow and filter.
- Water must be added to well before operation.
- Led warning indicator to give an alarm when well is empty.
- Water filling tap with knob control.
- Removable stainless steel deflectors to recuperate heat and reduce cooking time.
- Stainless steel splash guards on sides of cooking surface. Splash guards can be easily removed for cleaning.
- Top configuration can be installed on refrigerated / freezer base with limited layout options.
- Suitable for countertop installation.

#### Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Unit is 730mm deep to give a larger working surface area

#### APPROVAL:





### Modular Cooking Range Line 700XP Electric Grill Top HP 400mm

### **Included Accessories**

• 1 of Scraper for HP electric grill	PNC 206436	
Optional Accessories		
Junction sealing kit	PNC 206086	
• Support for bridge type installation, 800mm	PNC 206137	
• Support for bridge type installation, 1000mm	PNC 206138	
• Support for bridge type installation, 1200mm	PNC 206139	
• Support for bridge type installation, 1400mm	PNC 206140	
• Support for bridge type installation, 1600mm	PNC 206141	
• Support for bridge type installation, 400mm	PNC 206154	
• 2 supports with runners for open base for 4 GN1/1	PNC 206257	
Right and left side handrails	PNC 206307	
Back handrail 800 mm	PNC 206308	
• Rear paneling - 1200mm (700/900)	PNC 206376	
<ul> <li>Scraper for HP electric grill</li> </ul>	PNC 206436	
<ul> <li>Drain extension for Electric grill HP</li> </ul>	PNC 206437	
<ul> <li>Frontal handrail, 400mm</li> </ul>	PNC 216046	
<ul> <li>Frontal handrail, 800mm</li> </ul>	PNC 216047	
<ul> <li>Frontal handrail, 1200mm</li> </ul>	PNC 216049	
<ul> <li>Frontal handrail, 1600mm</li> </ul>	PNC 216050	
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
		_





• 2 side covering panels for top

appliances








PNC 216277 🔲



# Modular Cooking Range Line 700XP Electric Grill Top HP 400mm

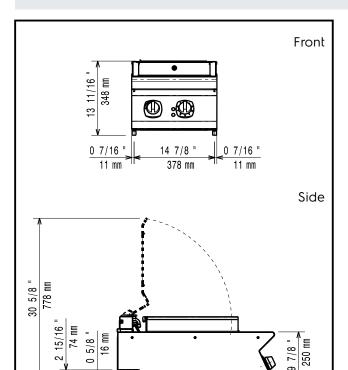

WI

17 11/16 " 450 mm

Drain Electrical inlet (power)

74 1

EQ **Equipotential screw** 

D

4 1/16 " 103 mm 5 7/8 "

149 mm

Water inlet

### Top 63 WI Pipe thread 3/4 ΕI D 3 15/16 ΕQ 100 mm 1 11/16 " 43 mm 3 15/16 " 100 mm 4 15/16 126 mm

### **Electric**

Supply voltage:

371302 (E7JJCIAOMCG) 230 V/3N ph/50/60 Hz

Electrical power max.: 3.75 kW

Predisposed for:

### **Key Information:**

Cooking surface width: 345 mm Cooking surface depth: 400 mm External dimensions, Width: 400 mm External dimensions, Depth: 730 mm External dimensions, Height: 250 mm Net weight: 44 kg

If appliance is set up either next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group: HEG7E1











8// 6 250 |

15/16 E

24