



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt direct heat

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371271 (E7BSGHDNF0)

60-lt direct gas Boiling Pan

Short Form Specification

Item No. _____

To be installed on height adjustable feet in stainless steel. Suitable for natural gas or LPG. Robust burners in stainless steel with flame failure device and protected pilot light. Thermostatic temperature control for power regulation allowing precise temperature cooking. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Discharge tube and tap are very easy to clean from outside.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Large capacity food tap enables safe and effortless discharging of contents.
- No overshooting of cooking temperatures, fast reaction.
- Smooth large surfaces, easy access for cleaning.
- Solenoid valve to refill with hot and cold water.
- Unit to have stainless steel feet with height adjustment up to 50 mm.
- Produce is uniformly heated in the base and side walls of the kettle by a direct heating system.
- Sides of vessel with satin finishing for easy cleaning.

Construction

- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- One piece pressed 1.5 mm work top in Stainless steel.
- IPx4 water protection.
- The tanks are welded in two parts, the side band is in AISI 304, bottom is in ASI 316L, lids are in AISI 304.

Sustainability



- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400mm PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm PNC 206152 ☐
- Frontal kicking strip, 800mm (not for refr-freezer base) PNC 206176 ☐
- Frontal kicking strip, 1000mm (not for refr-freezer base) PNC 206177 ☐

APPROVAL: _____

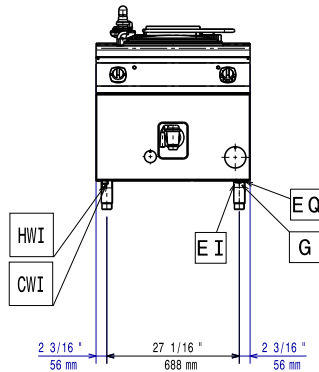


Experience the Excellence
www.electroluxprofessional.com

• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐
• Pair of side kicking strips	PNC 206249	☐
• Pair of side kicking strips for concrete installation	PNC 206265	☐
• Chimney upstand, 800mm	PNC 206304	☐
• Right and left side handrails	PNC 206307	☐
• Back handrail 800 mm	PNC 206308	☐
• Base support for feet or wheels - 400mm (700/900)	PNC 206366	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• 2 side covering panels for free standing appliances	PNC 216000	☐
• Frontal handrail, 800mm	PNC 216047	☐
• Frontal handrail, 1200mm	PNC 216049	☐
• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• 1-section noodle basket for 60lt boiling pans	PNC 921626	☐
• Trolley with lifting & removable tank	PNC 922403	☐
• Measuring rod for 60 l Boiling Pan	PNC 927000	☐
• Pressure regulator for gas units	PNC 927225	☐



Front

[illegible]

CWI1 = Cold Water inlet 1 (cleaning) HWI = Hot water inlet
D = Drain
EI = Electrical inlet (power)
G = Gas connection

Technical drawing of the 100 mm floor outlet (F) showing dimensions and components. The drawing includes the following dimensions and labels:

- Overall Dimensions:**
 - Top: 3 15/16" (100 mm)
 - Right: 20 7/16" (519 mm)
 - Bottom: 800 mm
 - Left: 20 13/16" (528 mm)
- Internal Dimensions:**
 - Top: 17 3/8" (441 mm)
 - Right: 17 7/8" (454 mm)
 - Bottom: 20 7/8" (533 mm)
 - Left: 17 3/8" (441 mm)
- Component Labels:**
 - F:** 100 mm floor outlet
 - G:** Gasket
 - EQ:** Equalizer
 - EI:** End Indicator
 - HWI:** High Water Indicator
 - CWI:** Control Water Indicator
- Other Dimensions:**
 - 3 15/16" (100 mm) - Top right
 - 1 1/2" (38 mm) - Right side, top
 - 2 3/16" (56 mm) - Right side, middle
 - 2 7/8" (73 mm) - Right side, bottom
 - MIN. 11 13/16" (MIN. 300 mm) - Bottom right
 - 31 1/2" (800 mm) - Bottom left
 - 1 7/8" (47 mm) - Left side, bottom

Pan useful capacity:	60 lt
Vessel (round) diameter:	420 mm
Net weight:	95 kg
Shipping weight:	84 kg
Shipping height:	1140 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.8 m ³
Certification group:	N7PG