



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt indirect heat

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



371269 (E7BSGHINF0)

60-lt indirect gas Boiling Pan
with pressure switch

Short Form Specification

Item No. _____

To be installed on height adjustable feet in stainless steel. Suitable for natural gas or LPG. Robust burners in stainless steel with flame failure device and protected pilot light. Temperature is controlled by a power regulator; heating elements with temperature limiter. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Discharge tube and tap are very easy to clean from outside.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Large capacity food tap enables safe and effortless discharging of contents.
- No overshooting of cooking temperatures, fast reaction.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Safety valve avoids overpressure of the steam in the jacket.
- Smooth large surfaces, easy access for cleaning.
- Solenoid valve to refill with hot and cold water.
- Unit to have stainless steel feet with height adjustment up to 50 mm.
- Sides of vessel with satin finishing for easy cleaning.
- Minimum load for correct functioning is 20 liters.

Construction

- One piece pressed 1.5 mm work top in Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- IPx4 water protection.
- The tanks are welded in two parts, the side band is in AISI 304, bottom is in AISI 316L, lids are in AISI 304.

Sustainability



- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Pressure switch control monitors energy and water consumption.

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400mm PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐
• Pair of side kicking strips	PNC 206249	☐
• Pair of side kicking strips for concrete installation	PNC 206265	☐
• Chimney upstand, 800mm	PNC 206304	☐
• Right and left side handrails	PNC 206307	☐
• Back handrail 800 mm	PNC 206308	☐
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	☐
• Base support for feet or wheels - 400mm (700/900)	PNC 206366	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Kit G.25.3 (NI) gas nozzles for 900 boiling pans	PNC 206463	☐
• 2 side covering panels for free standing appliances	PNC 216000	☐
• Frontal handrail, 800mm	PNC 216047	☐
• Frontal handrail, 1200mm	PNC 216049	☐
• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• 1-section noodle basket for 60lt boiling pans	PNC 921626	☐
• Trolley with lifting & removable tank	PNC 922403	☐
• Measuring rod for 60 l Boiling Pan	PNC 927000	☐
• Pressure regulator for gas units	PNC 927225	☐



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt indirect heat

Front

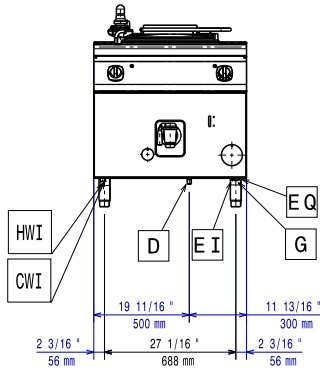

Electric

Supply voltage: 230 V/1N ph/50 Hz
Total Watts: 0.1 kW

Gas

Gas Power: 14 kW
Standard gas delivery: Natural Gas G20 (20mbar)
Gas Type Option: LPG
Gas Inlet: 1/2"

Water:


Water drain outlet size: 1 1/2"

Key Information:

No clearance needed on rear sides of unit if wall is of non combustible type. If wall is combustible, minimum 50 mm wall clearance should be maintained.


Pan useful capacity: 60 lt
Vessel (round) diameter: 420 mm
Net weight: 100 kg
Shipping weight: 100 kg
Shipping height: 1140 mm
Shipping width: 820 mm
Shipping depth: 860 mm
Shipping volume: 0.8 m³
Certification group: N7PG

Side

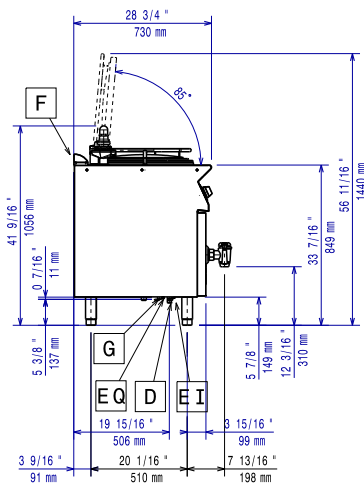

CWI = Cold Water inlet 1 (cleaning) HWI = Hot water inlet
D = Drain
EI = Electrical inlet (power)
G = Gas connection

Top

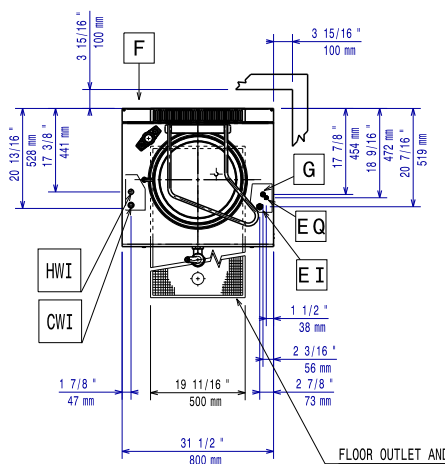

Modular Cooking Range Line
700XP Freestanding Gas Boiling Pan 60lt indirect heat

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.26