Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP Full Module Freestanding Electric Char-Grill



371242 (E7GREHGCFU)

Full module electric Grill free standing

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. Heating via incoloy armoured heating elements placed below the cooking plate. Cooking surface grids in enameled cast iron, easily removable for cleaning. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

Main Features

ITEM #

SIS #

AIA #

<u>MODEL #</u> NAME #

- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- The low temperature of the external panels allow to work in safety.
- Each half module is heated via incoloy armoured heating elements below the cooking plate.
- Separate controls for each half module.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.

Included Accessories

• 1 of Scraper for free standing PNC 206422 grills

Optional Accessories

- Junction sealing kit
- Kit 4 wheels 2 swivelling with PNC 206135 brake - it is mandatory to install Base support and wheels

PNC 206086 🛛

- Flanged feet kit PNC 206136 🗅
- Frontal kicking strip for concrete PNC 206150 □ installation, 1000mm
- Frontal kicking strip for concrete PNC 206151 D installation, 1200mm
- Frontal kicking strip for concrete PNC 206152 installation, 1600mm
- Frontal kicking strip, 800mm (not PNC 206176 □ for refr-freezer base)
- Frontal kicking strip, 1000mm (not PNC 206177 for refr-freezer base)
- Frontal kicking strip, 1200mm (not PNC 206178 for refr-freezer base)
- Frontal kicking strip, 1600mm (not PNC 206179 for refr-freezer base)
- Kit 4 feet for concrete installation PNC 206210

 (not for 900 line free standing grill)

APPROVAL:






 Central support for installation of drawers and grid (on 800/1200mm bases) and of doors (on 1200mm bases) 	PNC 206245	
 Pair of side kicking strips Pair of side kicking strips for concrete installation 	PNC 206249 PNC 206265	
 Water filling tap for free standing grills 	PNC 206281	
Chimney upstand, 800mmRight and left side handrails	PNC 206304 PNC 206307	
Back handrail 800 mm	PNC 206308	
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367	
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368	
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Stainless steel grids with drain shape for free standing wide grills (700XP)	PNC 206411	
 Scraper for grids with drainage channels - top grills 	PNC 206421	
Scraper for free standing grills	PNC 206422	
 2 side covering panels for free standing appliances 	PNC 216000	
 Frontal handrail, 800mm 	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
 Large handrail - portioning shelf, 800mm 	PNC 216186	

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP Full Module Freestanding Electric Char-Grill

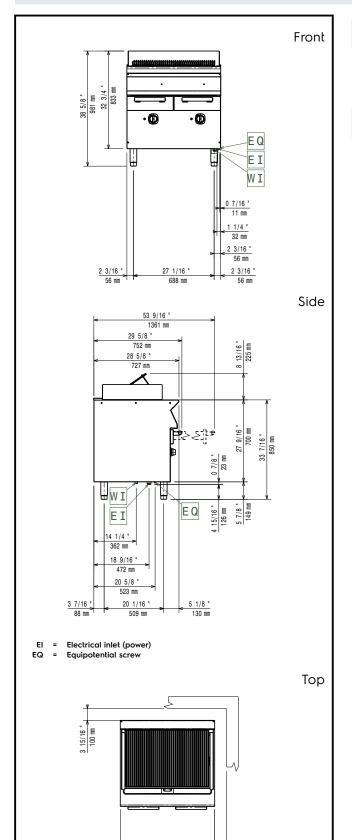

31 1/2

800 mm

3 15/16 "

100 mm

Electric	
Supply voltage:	380-400 V/3N ph/50-60 Hz
Predisposed for:	
Electrical power, max:	12 kW
Total Watts:	12 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight:	87 kg
Shipping weight:	99 kg
Shipping height:	1200 mm
Shipping width:	820 mm
Shipping depth:	900 mm
Shipping volume:	0.89 m³
Certification group:	EG72F
Cooking surface width:	631 mm
Cooking surface depth:	478 mm

Modular Cooking Range Line 700XP Full Module Freestanding Electric Char-Grill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.