

Saladette XL Saladette, 3 doors and UK plug (R452a)


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

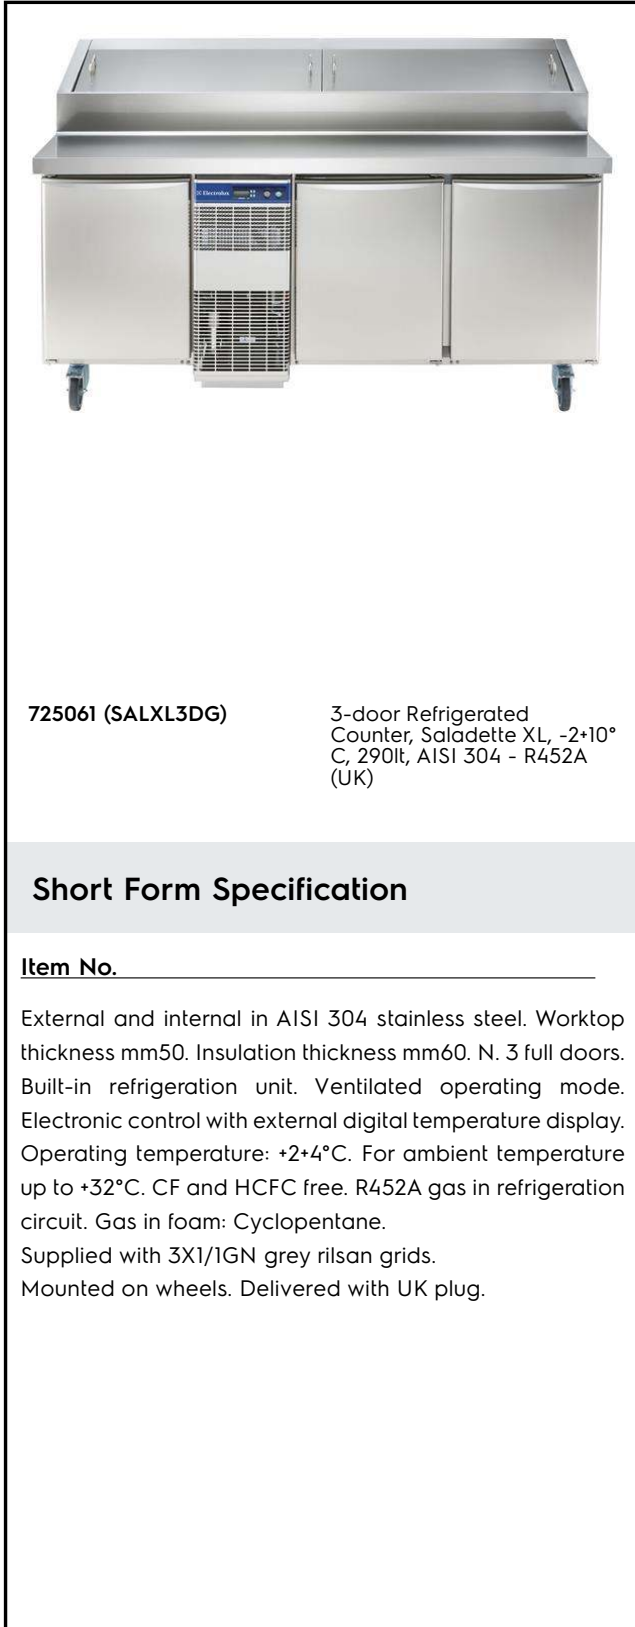
725061 (SALXL3DG)

 3-door Refrigerated
 Counter, Saladette XL, -2+10°
 C, 290lt, AISI 304 - R452A
 (UK)

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Worktop thickness mm50. Insulation thickness mm60. N. 3 full doors. Built-in refrigeration unit. Ventilated operating mode. Electronic control with external digital temperature display. Operating temperature: +2+4°C. For ambient temperature up to +32°C. CF and HCFC free. R452A gas in refrigeration circuit. Gas in foam: Cyclopentane. Supplied with 3X1/1GN grey rilsan grids. Mounted on wheels. Delivered with UK plug.

Main Features

- 60 mm insulation for energy saving.
- Anti-tilt runners accept GN 1/1 containers.
- Easy-to-use, electronic control panel. Fully programmable.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from -2 to +10°C to suit meat and different dairy storage requirements.
- No cross-contamination between upper and lower part (nothing will fall in the lower compartment).
- Electronic control with external digital temperature display.

Construction

- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on wheels.
- Rounded internal corners for ease of cleaning.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Delivered with UK plug.
- Heavy duty, balanced stainless steel lid, easy to remove and turn to facilitate cleaning.
- Large front working top (400 mm depth).
- Easy to clean: removable internal support structure with no dirt traps for unbeatable hygiene.
- If needed, working top can be removed for easier handling during installation (in case of narrow doors).
- Environmentally friendly: R452a as refrigerant gas.


Included Accessories

- 9 of 1/1GN grey rilsan grid PNC 881435

Optional Accessories

- Ethernet connector for IR33 (CAREL) Refrigerated Cabinets and Counters PNC 880252
- 1/1GN grey rilsan grid PNC 881435
- Lock for refrigerated counters PNC 881499
- Kit 2 drawers 1/2 and rack for Refrigerated Counter, Saladette XL PNC 881514
- Kit 3 drawers 1/3 and rack for Refrigerated Counter, Saladette XL PNC 881515

APPROVAL: _____

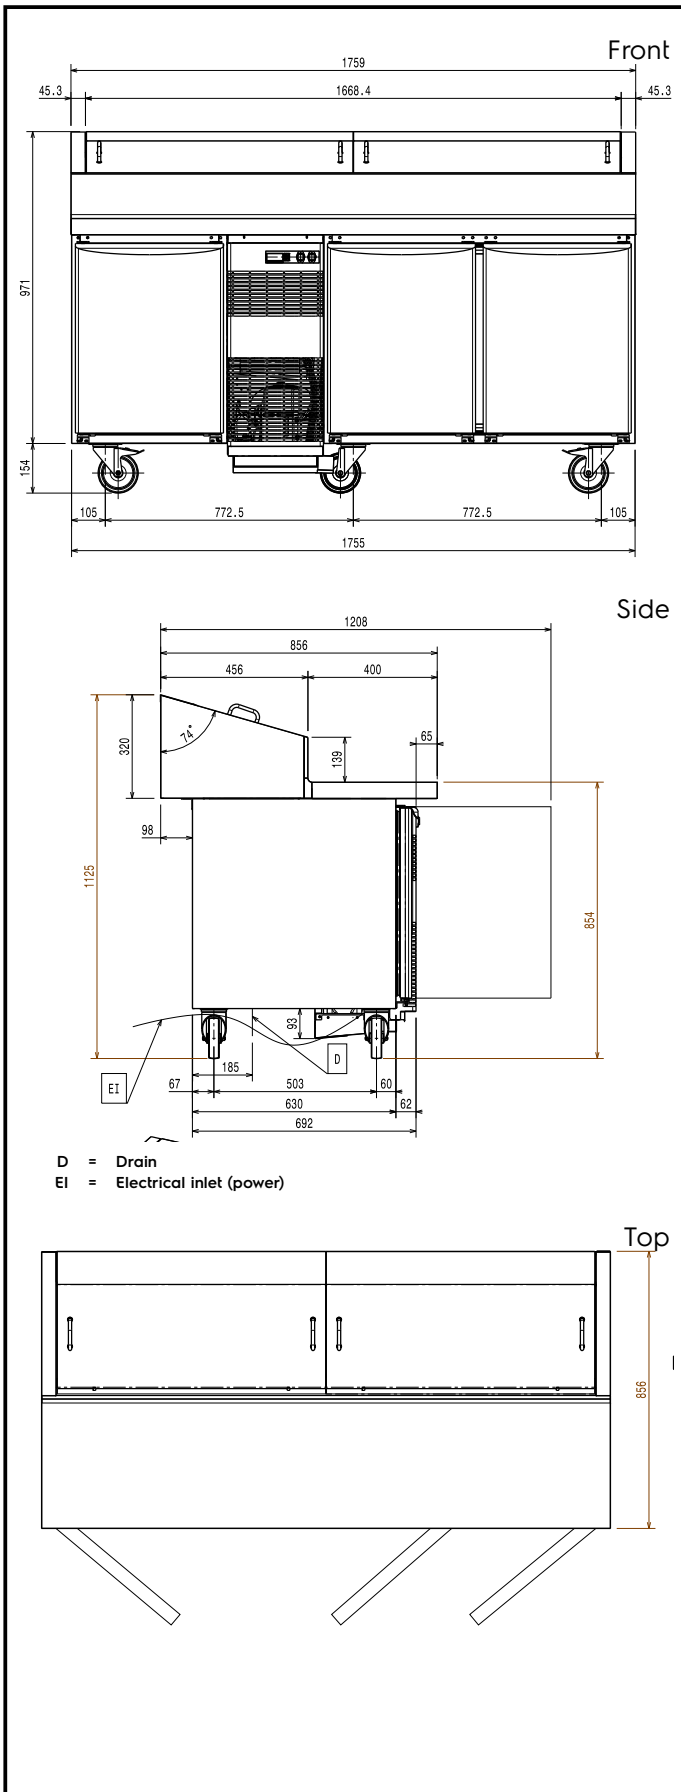

Electric

Supply voltage:

725061 (SALXL3DG)

230 V/1 ph/50 Hz

Key Information:

Gross capacity:

440 lt

External dimensions, Width:

1759 mm

External dimensions, Depth:

856 mm

External dimensions, Depth

with Doors Open:

1110 mm

External dimensions, Height:

1121 mm

Type of external material:

304 AISI

Type of internal material:

304 AISI

Internal side panels material:

304 AISI

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Refrigerant type:

R452A

Refrigerant weight:

535 g

Operating temperature min.:

2 °C

Operating temperature max.:

4 °C