

## Digital Cabinets Roll-in Compact Refrigerator 750 lt - 1 door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**725095 (RI075RIF)**

 1-door Roll-in Refrigerator  
 750lt, 0+10°C, AISI 304, R290

### Short Form Specification

**Item No.** \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R290 gas in refrigeration circuit.

### Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- Ventilated cooling for optimal temperature distribution.
- Lift-up control panel to better access main components.
- Digital control panel with temperature display.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- One full door.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Complies with main international certification bodies and is CE marked.
- Inner side protectors to protect the internal walls.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

**APPROVAL:** \_\_\_\_\_

## Construction

- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Built-in compressor to suit operating conditions.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- External panels are in AISI 304 stainless steel for higher level of hygiene.

## User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

## Sustainability



- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.


## Optional Accessories

- Insulated floor-ramp for 750lt Roll-in PNC 881278 ☐  
Refrigerator
- Trolley 18x2/1GN for roll-in 750lt PNC 881521 ☐


## Recommended Detergents

- S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T PNC 0S2881 ☐
- S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited PNC 0S3257 ☐  
Quantity

Front

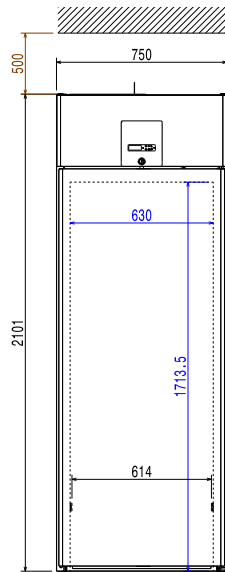


Side

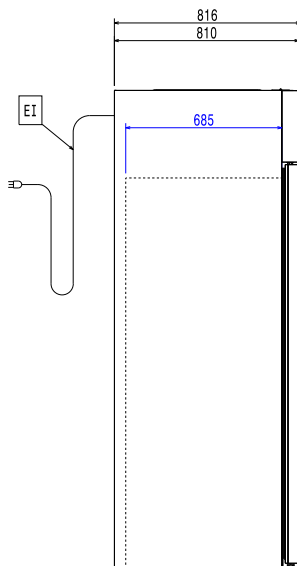

EI = Electrical inlet (power)

Top



#### Electric

|                  |                      |
|------------------|----------------------|
| Supply voltage:  | 220-240 V/1 ph/50 Hz |
| Predisposed for: | 220-230 V 60 Hz      |

#### Key Information:

##### Door hinges:

|                              |                  |
|------------------------------|------------------|
| External dimensions, Width:  | 750 mm           |
| External dimensions, Depth:  | 816 mm           |
| External dimensions, Height: | 2101 mm          |
| Number and type of doors:    | 1 Full           |
| External side panels:        | 304 AISI         |
| External top panels:         | Galvanized Steel |
| External door material:      | 304 AISI         |
| Internal panels material:    | 304 AISI         |

#### Refrigeration Data

|                             |        |
|-----------------------------|--------|
| Operating temperature min.: | 0 °C   |
| Operating temperature max.: | 10 °C  |
| Compressor power:           | 1/3 hp |

#### ISO Certificates

|                |                                           |
|----------------|-------------------------------------------|
| ISO Standards: | ISO 9001; ISO 14001; ISO 45001; ISO 50001 |
|----------------|-------------------------------------------|

#### Sustainability

|                              |       |
|------------------------------|-------|
| Refrigerant type:            | R290  |
| Refrigeration power:         | 520 W |
| Refrigerant weight (unit 1): | 150 g |