

Digital Cabinets

Roll-in Compact Refrigerator 750 lt - 1 door - remote

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



725097 (R1075R1FR)

1-door Roll-in Refrigerator
750lt, 0+10°C, AISI 304,
remote

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Pre-arranged for remote refrigeration unit (non included); ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C.

Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- Ventilated cooling for optimal temperature distribution.
- Lift-up control panel to better access main components.
- Digital control panel with temperature display.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- One full door.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Complies with main international certification bodies and is CE marked.
- Inner side protectors to protect the internal walls.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.

APPROVAL: _____

Construction

- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Remote compressor to suit operating conditions.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- External panels are in AISI 304 stainless steel for higher level of hygiene.

Sustainability



- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K). CFC and HCFC-free insulation.


Optional Accessories

- Insulated floor-ramp for 750lt Roll-in PNC 881278 ☐
Refrigerator
- Trolley 18x2/1GN for roll-in 750lt PNC 881521 ☐




Electrolux
PROFESSIONAL

Digital Cabinets Roll-in Compact Refrigerator 750 lt - 1 door - remote

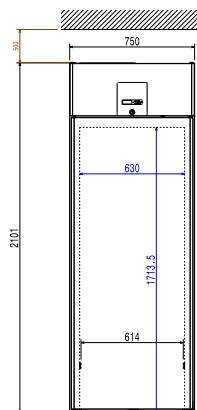


Front



Side

EI = Electrical inlet (power)
RI = Refrigerant Inlet
RO = Refrigerant Outlet



Top

Electric

Supply voltage:

725097 (RI075R1FR)

220-240 V/1 ph/50/60 Hz

Key Information:

| | |
|------------------------------|------------------|
| Door hinges: | Right Side |
| External dimensions, Width: | 750 mm |
| External dimensions, Depth: | 816 mm |
| External dimensions, Height: | 2101 mm |
| Number and type of doors: | 1 Full |
| External side panels: | 304 AISI |
| External top panels: | Galvanized Steel |
| External door material: | 304 AISI |
| Internal panels material: | 304 AISI |

Refrigeration Data

| | |
|--|-------------------|
| Control type: | Digital |
| Operating temperature max.: | 10 °C |
| Refrigeration type: | R134a;R513A;R426A |
| Suggested refrigeration power: | 580 W |
| Condition at evaporation temperature: | -10 °C |
| Condition at condensation temperature: | 55 °C |
| Condition at ambient temperature: | 43 °C |
| Connection pipes (remote) - outlet: | 9.8 mm |
| Connection pipes (remote) - inlet: | 6 mm |

ISO Certificates

| | |
|----------------|---|
| ISO Standards: | ISO 9001; ISO 14001; ISO 45001; ISO 50001 |
|----------------|---|



Digital Cabinets
Roll-in Compact Refrigerator 750 lt - 1 door - remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.05.08