



**Digital Cabinets  
Roll-in Compact Refrigerator 750 lt  
- 1 door - remote**

ITEM #  
MODEL #  
NAME #  
SIS #  
AIA #



**725097 (RI075R1FR)**

1-door Roll-in Refrigerator  
750lt, 0+10°C, AISI 304,  
remote

### Short Form Specification

#### Item No.

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Pre-arranged for remote refrigeration unit (non included); ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C.

### Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m<sup>2</sup>).
- Ventilated cooling for optimal temperature distribution.
- Lift-up control panel to better access main components.
- Digital control panel with temperature display.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- One full door.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Complies with main international certification bodies and is CE marked.
- Inner side protectors to protect the internal walls.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

**APPROVAL:**



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

## Construction

- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Remote compressor to suit operating conditions.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- External panels are in AISI 304 stainless steel for higher level of hygiene.

## User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

## Sustainability



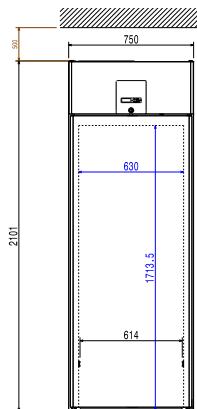
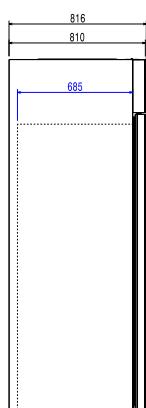
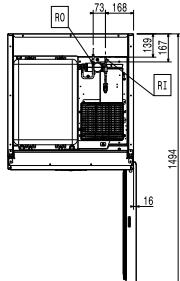
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.

## Optional Accessories

- Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a PNC 880231
- Insulated floor-ramp for 750lt Roll-in Refrigerator PNC 881278
- Trolley 18x2/1GN for roll-in 750lt PNC 881521

## Recommended Detergents

- S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T PNC 0S2881
- S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity PNC 0S3257


**Front**

**Side**

**Top**

**EI** = Electrical inlet (power)  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

**Electric**

**Supply voltage:** 220-240 V/1 ph/50/60 Hz

**Key Information:**

<b>Door hinges:</b>	750 mm
<b>External dimensions, Width:</b>	750 mm
<b>External dimensions, Depth:</b>	816 mm
<b>External dimensions, Height:</b>	2101 mm
<b>Number and type of doors:</b>	1 Full
<b>External side panels:</b>	304 AISI
<b>External top panels:</b>	Galvanized Steel
<b>External door material:</b>	304 AISI
<b>Internal panels material:</b>	304 AISI

**Refrigeration Data**

<b>Control type:</b>	Digital
<b>Operating temperature max.:</b>	10 °C
<b>Refrigeration type:</b>	R134a;R513A;R426A
<b>Suggested refrigeration power:</b>	580 W
<b>Condition at evaporation temperature:</b>	-10 °C
<b>Condition at condensation temperature:</b>	55 °C
<b>Condition at ambient temperature:</b>	43 °C
<b>Connection pipes (remote) - outlet:</b>	9.8 mm
<b>Connection pipes (remote) - inlet:</b>	6 mm

**ISO Certificates**

**ISO Standards:** ISO 9001; ISO 14001; ISO 45001; ISO 50001