

**ecostore**  
**1 Door Digital Freezer, 670lt**  
**(-22 / -15) - Remote (CO2)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**725245 (REX7IFFRCO2)**

1-door Freezer 670lt, -22-15°  
 C, digital, AISI 304, remote,  
 CO2 with valve

### Short Form Specification

#### Item No.

Full door freezer with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Remote refrigeration unit; CO2 refrigerant with valve; ventilated operation; automatic defrost and evaporation of defrost water.

### Main Features

- Right hinged full door.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced airflow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Tropicalized unit.

### Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with rounded corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Doors are self-closing and can be fully opened up to 180°.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- Remote refrigeration unit.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Solenoid valve included.

### User Interface & Data Management

- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

### Sustainability



APPROVAL: \_\_\_\_\_


- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- CFC and HCFC-free insulation.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- CO<sub>2</sub> (R744) is the refrigerant choice that's safe for the environment and delivers outstanding performance.  
 Eco-Friendly: Zero Ozone Depletion Potential and an ultra-low Global Warming Potential (GWP = 1).  
 Safe to Use: Non-toxic and non-flammable for peace of mind.  
 Sustainable: A natural refrigerant that supports a greener, cleaner planet.

### Included Accessories


- 3 of 2/1GN grey rilsan grid with 2 runners PNC 881020

### Optional Accessories

- |                                                                                  |            |                          |
|----------------------------------------------------------------------------------|------------|--------------------------|
| • 2 stainless steel runners for refrigerated cabinets - (Marine)                 | PNC 880242 | <input type="checkbox"/> |
| • Set of 8 GN1/1 PVC containers for fish                                         | PNC 880243 | <input type="checkbox"/> |
| • Spacer for 670 lt and 1430 lt refrigerated cabinets                            | PNC 880248 | <input type="checkbox"/> |
| • Pedal opening for cabinets                                                     | PNC 880324 | <input type="checkbox"/> |
| • Kit remote alarm                                                               | PNC 880570 | <input type="checkbox"/> |
| • Ethernet connectivity kit IJF for Refrigeration                                | PNC 880685 | <input type="checkbox"/> |
| • 1/1GN plastic container with false bottom                                      | PNC 880705 | <input type="checkbox"/> |
| • Kit of 10 pairs of runners and 4 tray supports to fit pastry trays (400x600mm) | PNC 881003 | <input type="checkbox"/> |
| • 2/1GN grey rilsan grid                                                         | PNC 881004 | <input type="checkbox"/> |
| • 2/1GN aisi 304 stainless steel grid                                            | PNC 881016 | <input type="checkbox"/> |
| • 2/1GN 304 AISI stainless steel grid with 2 runners                             | PNC 881018 | <input type="checkbox"/> |
| • 2/1GN grey rilsan grid with 2 runners                                          | PNC 881020 | <input type="checkbox"/> |
| • Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers     | PNC 881021 | <input type="checkbox"/> |
| • 2/1GN pvc container with lid and 2 runners                                     | PNC 881039 | <input type="checkbox"/> |
| • 2/1GN perforated shelf                                                         | PNC 881042 | <input type="checkbox"/> |
| • 1/1GN rilsan steel wire basket h=150mm                                         | PNC 881043 | <input type="checkbox"/> |
| • 2/1GN grey rilsan basket+2 runners h=150mm                                     | PNC 881047 | <input type="checkbox"/> |

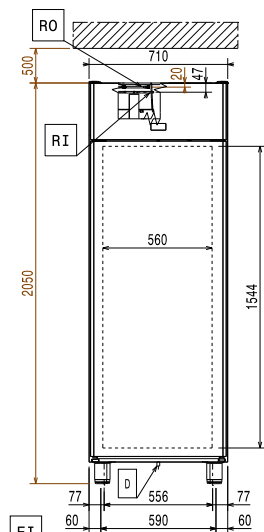


Front

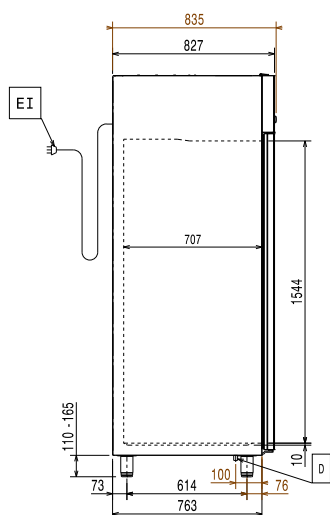

Side

ED = Remote electrical connection      RO = Refrigerant Outlet  
EI = Electrical inlet (power)  
RI = Refrigerant Inlet

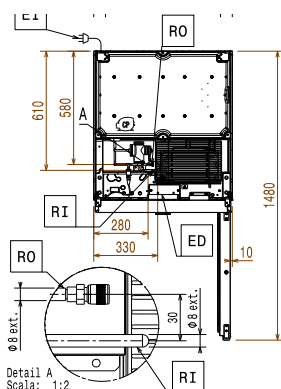

Top

## Electric

**Supply voltage:** 220-240 V/1 ph/50/60 Hz

**Capacity:**

Number and type of grids (included): 3 - GN 2/1

### Key Information:

|                                                    |           |
|----------------------------------------------------|-----------|
| <b>Door hinges:</b>                                |           |
| <b>External dimensions, Width:</b>                 | 710 mm    |
| <b>External dimensions, Depth:</b>                 | 835 mm    |
| <b>External dimensions, Depth with Doors Open:</b> | 1480 mm   |
| <b>External dimensions, Height:</b>                | 2050 mm   |
| <b>Number and type of doors:</b>                   | 1 Full    |
| <b>Type of external material:</b>                  | 304 AISI  |
| <b>Type of internal material:</b>                  | 304 AISI  |
| <b>Internal side panels material:</b>              | 304 AISI  |
| <b>Number of positions &amp; pitch:</b>            | 44; 30 mm |
| <b>Gross capacity:</b>                             | 670 lt    |

## Refrigeration Data

|                                        |                                                              |
|----------------------------------------|--------------------------------------------------------------|
| Operating temperature min.:            | -22 °C                                                       |
| Refrigeration type:                    | R744                                                         |
| Suggested refrigeration power:         | 573 W                                                        |
| Condition at evaporation temperature:  | -23.3 °C                                                     |
| Condition at condensation temperature: | 55 °C                                                        |
| Condition at ambient temperature:      | 32 °C                                                        |
| Connection pipes (remote) - outlet:    | 9.5 mm                                                       |
| Connection pipes (remote) - inlet:     | 6 mm                                                         |
| *Note:                                 | Ref. Power calculated at a linear distance of 15 mt (piping) |

## ISO Certificates

|                |                                           |
|----------------|-------------------------------------------|
| ISO Standards: | ISO 9001; ISO 14001; ISO 45001; ISO 50001 |
|----------------|-------------------------------------------|