

## SkyLine Chills Blast Chiller-Freezer 6GN1/1 30/30 kg, Remote

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**727733 (EBFA61RTE)**

Skyline Chills Blast Chiller Freezer 30/30kg, 6 GN 1/1 or 600x400mm (12 levels pitch 30mm) with touch screen control, Top and remote refrigerating Unit

### Short Form Specification

#### Item No. \_\_\_\_\_

- Blast chiller freezer with high resolution full touch screen interface, multilanguage
- For 6 GN 1/1 or 600x400 mm trays. Up to 9 ice cream basins of 5 kg (165x360x125h mm)
- Load capacity: chilling 30 kg; freezing 30 kg
- OptiFlow air distribution system to achieve maximum performance with 7 fan speed levels
- Chilling/Freezing modes: Automatic (10 food families with 100+ different pre-installed variants); Programs (a maximum 1000 programs can be stored and organized in 16 different categories); Manual (soft chilling, hard chilling, freezing, holding, turbo cooling and lite hot cycles); Specialistic Cycles (Cruise chilling, proving, retarded proving, fast thawing, Sushi&Sashimi, Sous-Vide chilling, ice-cream, yogurt and chocolate)
- Special functions: MultiTimer chilling/freezing, Make-it-Mine to customize interface, SkyHub to customize homepage, agenda MyPlanner, SkyDuo connection to SkyLine ovens
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE 2.0)
- Automatic and manual defrosting and drying
- USB port to download HACCP data, programs and settings. Connectivity ready
- 3-point multi sensor core temperature probe
- Stainless steel construction throughout
- Internal rounded corners
- Remote refrigeration unit (optional accessory).
- R452a refrigerant gas
- Performance guaranteed at ambient temperatures of +43°C (Climatic class 5).

### Main Features

- Blast Chilling cycle: 30 kg from +90°C up to +3°C in less than 90 minutes.
- Chilling cycle (+10°C to -41°C) with automatic preset cycles:
  - Soft chilling (air temperature 0°C), ideal for delicate food and small portions.
  - Hard chilling (air temperature -20°C), ideal for solid food and whole pieces.
- X-Freeze cycle (+10°C to -41°C): ideal for blast freezing all kinds of food (raw, half or fully cooked).
- Lite-Hot cycle (+40°C to -18°C): ideal for soft heating preparations.
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Automatic mode including 10 food families (meat, poultry, fish, sauces and soup, vegetables, pasta/ rice, bread, savory and sweet bakery, dessert, beverage fast cooling) with 100+ different pre-installed variants. Through Automatic Sensing Phase the blast chiller optimizes the chilling process according to size, quantity and type of food loaded to achieve the selected result. Real time overview of the chilling parameters. Possibility to personalize and save up to 70 variants per family.
- Cycles+:
  - Cruise Cycle (Patented EP1716769B1 and related family) automatically sets the parameters for the quickest and best chilling (it works with probe)
  - Proving
  - Retarded Proving
  - Fast Thawing
  - Sushi&Sashimi (anisakis-free food)
  - Chill Sous-vide
  - Ice Cream
  - Yogurt
  - Chocolate
- Programs mode: a maximum of 1000 programs can be stored in the blast chiller's memory, to recreate the exact same high standard at any time. The programs can be grouped in 16 different categories to better organize the menu. 16-step chilling programs also available.
- MultiTimer function to manage up to 20 different chilling cycles at the same time, improving flexibility and ensuring excellent results. Can be saved up to 200 MultiTimer programs.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber combined with high precision variable speed fan.
- Fan with 7 speed levels. Fan stops in less than 5 seconds when door is opened.
- 3-point multi sensor core temperature probe for high precision and food safety.
- 6-point multi sensor core temperature probe for maximum precision and food safety (optional accessory).
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE 2.0 Patented US7971450B2 and related family) for an easier planning of the activities.

**APPROVAL:** \_\_\_\_\_

- Customizable pre-cooling and pre-heating functions.
- Automatic and manual defrosting and drying.
- Multi-purpose internal structure is suitable for 6 grids GN 1/1 (12 positions available with 30 mm pitch) 6 grids or trays 600 x 400 mm (12 positions available with 30 mm pitch) or 9 ice-cream basins of 5 kg each (h 125 x 165 x 360 mm).
- Performance guaranteed at ambient temperatures of +43°C (Climatic class 5).
- Working temperature from +90°C to +3°C in chilling mode or to -41°C in freezing mode.

## Construction

- Remote refrigeration unit (optional accessory).
- Environmentally friendly: R452a as refrigerant gas.
- Solenoid valve to automatically manage the gas pressure in the thermodynamic circuit.
- Main components in 304 AISI stainless steel.
- Evaporator with antirust protection.
- Motors and fan waterproof protected IP54.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- Removable magnetic gasket door with hygienic design.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Door stopper to keep the door open in order to avoid the formation of bad smells (kit available to be mounted on site, depending on preferred door hinge).
- Automatic heated door frame.
- No water connections required.  
Waste water can be plumbed into drain, but can also be collected in an optional waste container.

## User Interface & Data Management

- High resolution full touch screen interface (translated in more than 30 languages) - color-blind friendly panel.
- Pictures upload for full customization of cycles.
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- With SkyDuo the Oven and the Blast Chiller are connected to each other and communicate in order to guide the user through the cook&chill process optimizing time and efficiency (requires optional accessory).
- USB port to download HACCP data, share chilling programs and configurations.
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Automatic consumption visualization at the end of the cycle.

## Sustainability



- Human centered design with 4-star certification for ergonomics and usability.
- Holding at +3 °C for chilling or -22 °C for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).


#### Included Accessories

- 1 of Worktop for 6 GN 1/1 blast chiller freezer PNC 880581
- 1 of 3-sensor probe for blast chiller freezer PNC 880582


#### Optional Accessories

- |   |  |   |
|---|--|---|
| <ul style="list-style-type: none"> <li>• Bakery/pastry grid for blast chiller, lengthwise (600x400mm) PNC 880294 <input type="checkbox"/></li> <li>• Stacking kit for 6 GN 1/1 oven on 6 GN 1/1 blast chiller freezer - 100mm height PNC 880565 <input type="checkbox"/></li> <li>• 6-sensor probe for blast chiller freezer PNC 880566 <input type="checkbox"/></li> <li>• Kit of 3 single sensor probes for blast chiller/freezers PNC 880567 <input type="checkbox"/></li> <li>• Air remote refrigerating unit for 6 GN 1/1 blast chiller freezer - R452A PNC 880577 <input type="checkbox"/></li> <li>• Worktop for 6 GN 1/1 blast chiller freezer PNC 880581 <input type="checkbox"/></li> <li>• 3-sensor probe for blast chiller freezer PNC 880582 <input type="checkbox"/></li> <li>• Stacking kit for 6 GN 1/1 previous oven on 6 GN 1/1 new blast chiller freezer - 100mm height PNC 880586 <input type="checkbox"/></li> <li>• 5 stainless steel runners for 6 &amp; 10 GN 1/1 blast chiller freezer PNC 880587 <input type="checkbox"/></li> <li>• Flanged feet for blast chiller freezer PNC 880589 <input type="checkbox"/></li> <li>• Water remote refrigerating unit for 6 GN 1/1 blast chiller freezer - R452A PNC 880603 <input type="checkbox"/></li> <li>• 4 wheels for blast chiller tower execution with oven PNC 880676 <input type="checkbox"/></li> <li>• 4 wheels for blast chiller freezer PNC 881284 <input type="checkbox"/></li> <li>• Pair of AISI 304 stainless steel grids, GN 1/1 PNC 922017 <input type="checkbox"/></li> <li>• Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922036 <input type="checkbox"/></li> <li>• AISI 304 stainless steel grid, GN 1/1 PNC 922062 <input type="checkbox"/></li> <li>• Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 PNC 922086 <input type="checkbox"/></li> <li>• Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm PNC 922189 <input type="checkbox"/></li> <li>• Baking tray with 4 edges in perforated aluminum, 400x600x20mm PNC 922190 <input type="checkbox"/></li> <li>• Baking tray with 4 edges in aluminum, 400x600x20mm PNC 922191 <input type="checkbox"/></li> <li>• Pair of frying baskets PNC 922239 <input type="checkbox"/></li> <li>• AISI 304 stainless steel bakery/pastry grid 400x600mm PNC 922264 <input type="checkbox"/></li> <li>• Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922266 <input type="checkbox"/></li> <li>• Kit universal skewer rack and 4 long skewers for Lengthwise ovens PNC 922324 <input type="checkbox"/></li> <li>• Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens PNC 922325 <input type="checkbox"/></li> <li>• Universal skewer rack PNC 922326 <input type="checkbox"/></li> <li>• 4 long skewers PNC 922327 <input type="checkbox"/></li> <li>• Multipurpose hook PNC 922348 <input type="checkbox"/></li> <li>• Grid for whole duck (8 per grid - 1,8kg each), GN 1/1 PNC 922362 <input type="checkbox"/></li> <li>• Connectivity hub (SIM) Router Ethernet + WiFi + 4G (UE) PNC 922399 <input type="checkbox"/></li> <li>• Connectivity hub (LAN) Router Ethernet + WiFi PNC 922412 <input type="checkbox"/></li> </ul> |  | <ul style="list-style-type: none"> <li>• IoT module for OnE Connected and SkyDuo (one IoT board per appliance - to connect oven to blast chiller for Cook&amp;Chill process). PNC 922421 <input type="checkbox"/></li> <li>• Tray rack with wheels, 6 GN 1/1, 65mm pitch PNC 922600 <input type="checkbox"/></li> <li>• Tray rack with wheels, 5 GN 1/1, 80mm pitch PNC 922606 <input type="checkbox"/></li> <li>• Bakery/pastry tray rack with wheels 400x600mm for 6 GN 1/1 oven and blast chiller freezer, 80mm pitch (5 runners) PNC 922607 <input type="checkbox"/></li> <li>• Trolley for slide-in rack for 6 &amp; 10 GN 1/1 oven and blast chiller freezer PNC 922626 <input type="checkbox"/></li> <li>• Dehydration tray, GN 1/1, H=20mm PNC 922651 <input type="checkbox"/></li> <li>• Flat dehydration tray, GN 1/1 PNC 922652 <input type="checkbox"/></li> <li>• Spit for lamb or suckling pig (up to 12kg) for GN 1/1 ovens PNC 922709 <input type="checkbox"/></li> <li>• Probe holder for liquids PNC 922714 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/1, H=20mm PNC 925000 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/1, H=40mm PNC 925001 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/1, H=60mm PNC 925002 <input type="checkbox"/></li> <li>• Double-face griddle, one side ribbed and one side smooth, GN 1/1 PNC 925003 <input type="checkbox"/></li> <li>• Aluminum grill, GN 1/1 PNC 925004 <input type="checkbox"/></li> <li>• Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 PNC 925005 <input type="checkbox"/></li> <li>• Flat baking tray with 2 edges, GN 1/1 PNC 925006 <input type="checkbox"/></li> <li>• Baking tray for 4 baguettes, GN 1/1 PNC 925007 <input type="checkbox"/></li> <li>• Potato baker for 28 potatoes, GN 1/1 PNC 925008 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/2, H=20mm PNC 925009 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/2, H=40mm PNC 925010 <input type="checkbox"/></li> <li>• Non-stick universal pan, GN 1/2, H=60mm PNC 925011 <input type="checkbox"/></li> <li>• Kit of 6 non-stick universal pans, GN 1/1, H=20mm PNC 925012 <input type="checkbox"/></li> <li>• Kit of 6 non-stick universal pans, GN 1/1, H=40mm PNC 925013 <input type="checkbox"/></li> <li>• Kit of 6 non-stick universal pan GN 1/1, H=60mm PNC 925014 <input type="checkbox"/></li> </ul> |
|---|--|---|

Front

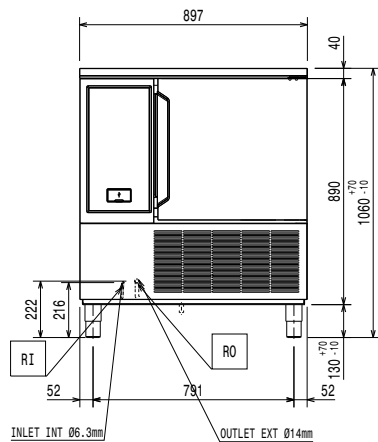


Side

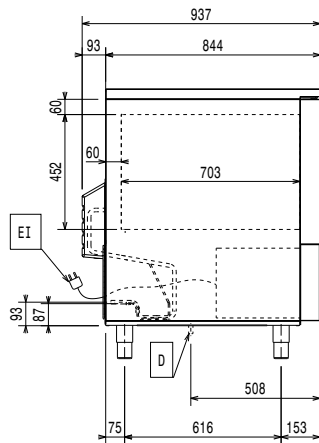

D = Drain  
 EI = Electrical inlet (power)  
 RO = Refrigerant Outlet

Top

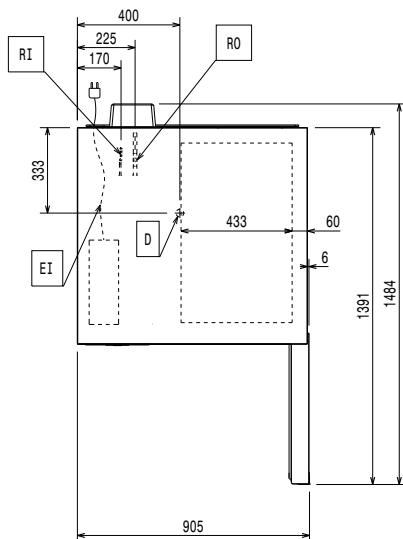

### Electric

**Supply voltage:**  
 727733 (EBFA61RTE) 220-240 V/1 ph/50/60 Hz  
**Electrical power max.:** 0.97 kW  
**Heating power:** 0.97 kW  
 Circuit breaker required

### Water:

**Drain line size:** 1"1/2

### Installation:

**Clearance:** 5 cm on sides and back.  
 Please see and follow detailed installation instructions provided with the unit

### Capacity:

**Max load capacity:** 30 kg  
**Trays type:** GN 1/1;600x400;Ice Cream

### Key Information:

**Door hinges:** Right Side  
**External dimensions, Width:** 897 mm  
**External dimensions, Depth:** 937 mm  
**External dimensions, Height:** 1060 mm  
**Net weight:** 155 kg  
**Shipping weight:** 128 kg  
**Shipping volume:** 1.28 m<sup>3</sup>

### Refrigeration Data

Remote refrigeration unit required.  
**Compatible refrigerant gas:** R404A; R452A  
**Condenser cooling type:** AIR  
**Suggested refrigeration power:** 2970 W  
**Condition at evaporation temperature:** -20 °C  
**Condition at condensation temperature:** 40 °C  
**Condition at ambient temperature:** 30 °C  
**Connection pipes (remote) - outlet:** 16 mm  
**Connection pipes (remote) - inlet:** 9.5 mm

Note: Refrigeration power calculated at a distance of 20 linear mt.

### ISO Certificates

**ISO Standards:** ISO 9001; ISO 14001; ISO 45001; ISO 50001