

160 Line Refrigerated Counter 160 It undercounter glass door (white) R600a



ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Internal light and lockable door.
- \bullet Suitable for use in ambient temperatures of up to 32 °C.
- Refrigerators models have operating temperatures that can be adjusted from +2 to +10 °C to suit both meat and dairy storage requirements.
- Very quiet operation: noise level less than 45 dB (A).
- Automatic defrost and automatic evaporation of defrost water.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- The rounded internal corners, the easily removable grids allow for ease of cleaning and high hygiene standards.
- Reversible door.
- Built-in refrigeration unit.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories

- Rear wheel kit for 160lt for freestanding refrigerator and freezer
- Stacking kit for 160lt undercounter white painted refrigerator

PNC 880148 🗆

PNC 880143 🗅

APPROVAL:



160 Line Refrigerated Counter 160 It undercounter glass door (white) R600a

Electric

Supply voltage:	
727791 (RUCR16W1V6)	220-240 V/1 ph/50 Hz
Electrical power max.:	0.11 kW
Key Information:	

Key Information:

Gross capacity:	165 lt
Net Volume:	87 lt
External dimensions, Width:	600 mm
External dimensions, Depth:	637 mm
External dimensions, Height:	850 mm
Number and type of doors:	1 Glass
Height adjustment:	0/10 mm
Number and type of grids	_
(included):	3 -
External side panels:	Prepainted white
External top panels:	Plastic
External door material:	Glass
	High Impact White

Internal panels material: Polystyrene Built-in Compressor and Refrigeration Unit

Refrigeration Data

Mechanical
-12 °C
2 °C
10 °C
Ventilated

Product Information (EU Regulation 2015/1094)

Type of model (EU Reg. 2015/1094):	counter chilled
Sustainability	
Energy Class (EU Reg. 2015/1094):	В
Yearly and daily energy consumption (EU Reg. 2015/1094):	542kWh/year - 1kWh/24h
Climate class (EU Reg. 2015/1094):	Light Duty (cl.3)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	26,95
Noise level:	49 dBA
Refrigerant type:	R600a
GWP Index:	3
Refrigeration power:	168 W
Refrigerant weight:	28 g



160 Line Refrigerated Counter 160 It - undercounter glass door (white) R600a

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

160 Line Refrigerated Counter 160 It undercounter glass door (white) R600a

EU energy labelling from 1st July 2016 The European energy labelling scheme for professional

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.




ENERGIA · ЕНЕРГИЯ ENEPГЕIA · ENERGIJA

ENERGY · ENERGIE · ENERGI

542

kWh/annum

8 🏠

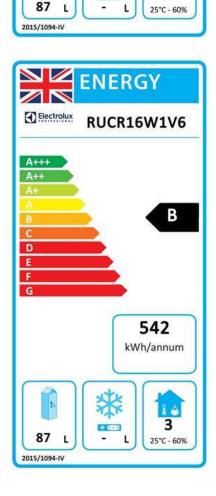

* * * *

160 Line Refrigerated Counter 160 It - undercounter glass door (white) R600a

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.