

160 Line Freezer Counter 160 lt - undercounter, R600a

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


727793 (RUCF16X1C6)

1-door Undercounter Freezer 160lt, -15-20°C, prepainted grey with stainless steel door, R600a

727792 (RUCF16W1C6)

1-door Undercounter Freezer 160lt, -15-20°C, prepainted white, R600a

Short Form Specification

Item No. _____

430 AISI stainless steel reversible door with lock. Top in 430 AISI stainless steel. Grey painted external sides. Interior in white High Impact Polystyrene with 55mm insulation. Inner cell with rounded corners. Door with removable "balloon" gasket. Built-in refrigeration unit; static operating mode; manual defrost; electronic control; external digital temperature display. Temperature range -20°/-15°C at 43 °C ambient temperature. CFC and HCFC free insulation. R600a gas in refrigeration circuit. Gas in foam: Cyclopentane. IP23 protection. Supplied with n.3 rilsan grids.

Main Features

- Very quiet operation: noise level less than 45 dB (A).
- Digital temperature display and simple electromechanical control panel.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Simple control panel.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Manual defrost.
- Adjustable temperature range from -15°C to -20°C to suit all storage requirements.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Reversible door.
- Lockable door.
- CFC and HCFC free (ecological refrigerant type: R600a).

Sustainability




- CFC and HCFC-free insulation.

Optional Accessories


- Rear wheel kit for 160lt for freestanding refrigerator and freezer PNC 880143
- 3 rilsan baskets for 160lt undercounter freezer PNC 880189

APPROVAL: _____

Front

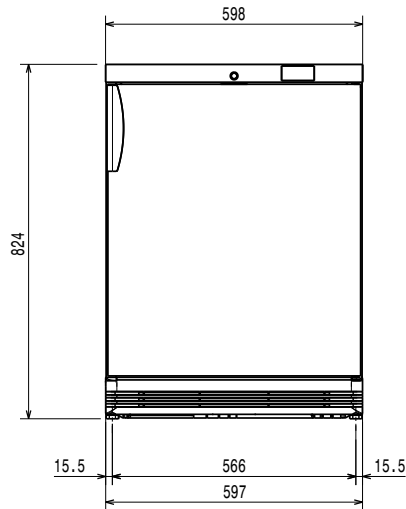


Side

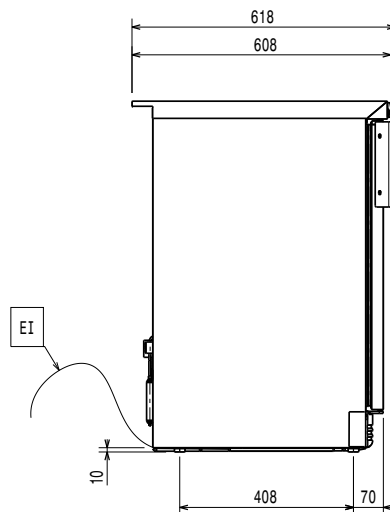

EI = Electrical inlet (power)

Top

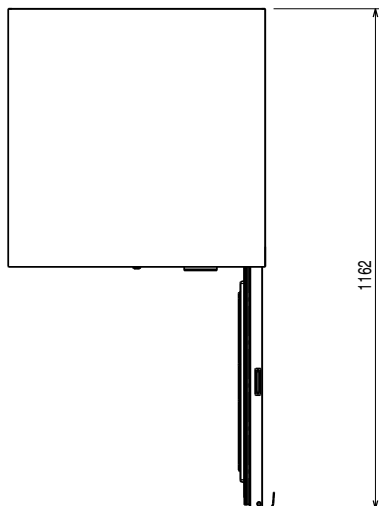
Electric
Supply voltage:

727793 (RUCF16X1C6) 220-240 V/1 ph/50 Hz

727792 (RUCF16W1C6) 220-240 V/1 ph/50 Hz

Electrical power max.: 0.085 kW

Key Information:
Gross capacity: 120 lt

External dimensions, Width: 598 mm

External dimensions, Depth: 618 mm

External dimensions, Height: 825 mm

Number and type of doors: 1 Full

Height adjustment: 0/10 mm

External side panels:

727793 (RUCF16X1C6) Prepainted Steel

727792 (RUCF16W1C6) Prepainted white

External top panels: Stainless Steel

External door material:

727793 (RUCF16X1C6) Stainless steel antifingertip

727792 (RUCF16W1C6) Prepainted white

Internal panels material: High Impact White

Polystyrene

Refrigeration Data
Control type: Electronic

Refrigeration power at evaporation temperature: -30 °C

Operating temperature min.: -20 °C

Operating temperature max.: -15 °C

Operating mode: Static

Cooling unit: Built-In

Sustainability
Noise level: 47 dBA

Refrigerant type: R600a

Refrigeration power: 163 W

Refrigerant weight: 55 g