

400 Line 400lt Line Freezer, 1 Door (Stainless steel) R290

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


727862 (R04FSF4)

 1-door Freezer 400lt, -15-24°
 C (R290), stainless steel

Short Form Specification

Item No. _____

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R290 refrigerant gas. Supplied with n. 4 evaporating grids.

Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction


- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

Optional Accessories


- Kit of wheels for 400lt refrigerators PNC 880348
- Ethernet connectivity kit IJF for Refrigeration PNC 880685
- Pvc container with false bottom for 400lt PNC 881072

APPROVAL: _____

Front

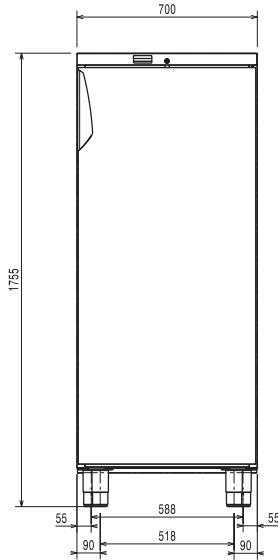


Side

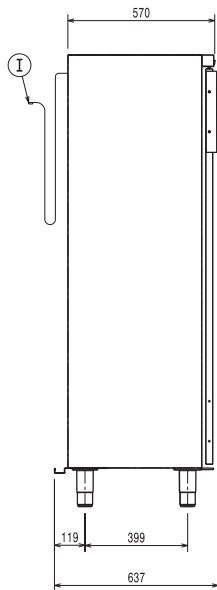

EI = Electrical inlet (power)

Top

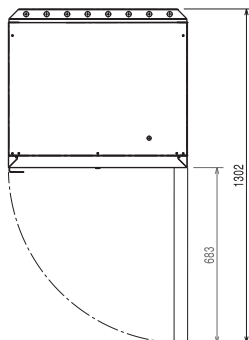

Electric

Supply voltage:

727862 (R04FSF4) 220-240 V/1 ph/50 Hz

Electrical power max.:

0.37 kW

Key Information:

Gross capacity:	400 lt
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
External dimensions, Height:	1755 mm
Number and type of grids (included):	- 600x400
Type of external material:	Stainless Steel
External door material:	Stainless Steel

Refrigeration Data

Control type:	Digital
Compressor power:	3/4 hp
Refrigeration power at evaporation temperature:	-23.3 °C
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static
Cooling unit:	Built-In
Defrost type:	Manual

Sustainability

Noise level:	56 dBA
Refrigerant type:	R290
Refrigeration power:	644 W
Refrigerant weight:	115 g