
# **Electrolux**

**Pastry and Bakery Line** 3 Door Refrigerated Counter, -2°/+7° C, 600X400 grid, no top

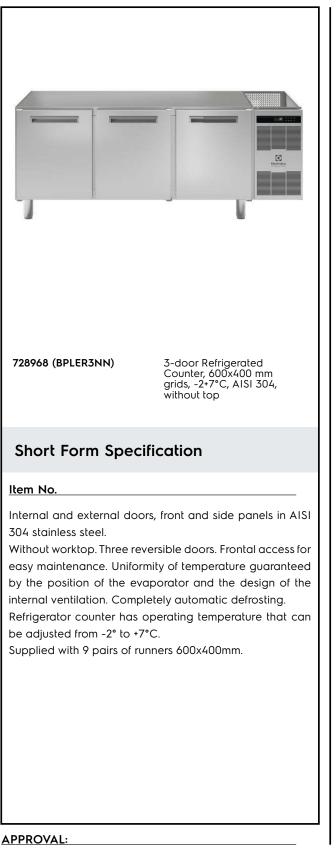

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

#### Main Features

- Suitable for use in ambient temperature of up to 40°C (climatic class 5).
- Electronic control panel and digital display.
- Frontal access for easy maintenance.
- Internal runners removable without any tools for faster cleaning operations.
- Adjustable temperature range from -2°C to +7°c.

#### Construction

- The position of the evaporator and the design of the internal ventilation facilitate the uniformity of the temperature.
- Stainless steel AISI 304 internal and external panels including back.
- Rounded internal corners for ease of cleaning.
- Self closing doors.
- Adjustable feet from 140mm to 240mm.

#### Sustainability



- lowest environmental impact (GWP=3) CFC and HCFC free. • Insulation thickness: 60 mm to ensure effective
- insulation with minimum energy consumption.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Top energy efficiency (class A) and granted uniformity even at extreme working conditions (class 5; 40°C and 40% humidity): unbeatable performance, certified by energy test protocol UNI EN ISO 22041:2020.

#### Included Accessories


• 9 of Pair of runners 600x400 mm PNC 880673 for Pastry Counter

#### **Optional Accessories**

- Grid, 600x400mm for pastry PNC 728875 🗅 counter
- Stainlees steel grid, 600x400mm PNC 728876 for pastry counter
- Pair of runners 600x400 mm for PNC 880673 🗅 Pastry Counter



## Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7° C, 600X400 grid, no top

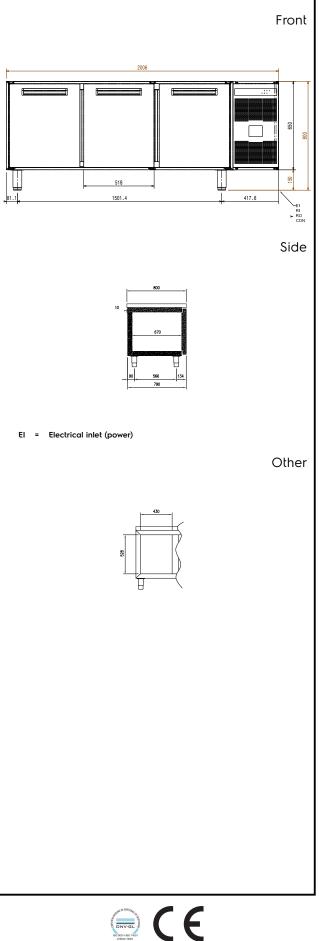

ront	Electric	
	Supply voltage: 728968 (BPLER3NN) Electrical power max.:	230 V/1N ph/50 Hz 0.247 kW
	Key Information:	
5ide	Gross capacity: Net Volume: N° of doors: Door hinges: External dimensions, Width: External dimensions, Depth External dimensions, Depth with Doors Open: External dimensions, Height: Type of external material:	545 lt 360 lt 3 1 Left+2 Right 2006 mm 790 mm 1280 mm 800 mm Stainless Steel AISI 304 Scotch Brite
	Type of internal material: Internal side panels material:	304 AISI 304 AISI
	Refrigeration Data	
	Control type: Refrigeration power at evaporation temperature: Operating temperature min.: Operating temperature max.:	-10 °C -2 °C 7 °C
	Product Information (EU	Regulation 2015/1094)
	Type of model (EU Reg. 2015/1094):	counter chilled
ther	Sustainability	
	Energy Class (EU Reg. 2015/1094): Yearly and daily energy consumption (EU Reg.	A
	2015/1094): Climate class (EU Reg. 2015/1094): Energy Efficiency Index-EEI (EU Reg. 2015/1094): Refrigerant type: GWP Index:	515kWh/year - 1kWh/24h Heavy Duty (5) 22 R290 3

Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7°C, 600X400 grid, no top

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

### Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7° C, 600X400 grid, no top


#### EU energy labelling from 1st July 2016 The European energy labelling scheme for professional


The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.



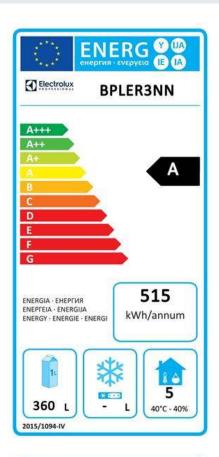

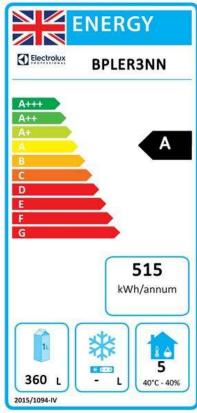

Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7°C, 600X400 grid, no top

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

